



CALYPSO MT



It offers a flexible, multi-energy appliance with superior domestic hot water supply, open to new system possibilities...

ELEMENT

Stainless steel

RANGE

Vertical 50 - 80 - 100 - 120 - 150

Horizontal (wall hung or floor standing) 80 - 100 - 120 - 150

REGULATION

External for vertical models

CONNECTIONS

Right or left sided

STANDARD FEATURES

As per standard product



5 BOLTS FLANGE



STEEL EPOXY
POWDER
COATED JACKET



BLUE SILICON
ENAMELLING



HIGH LIQUID INTRUSION
PROTECTION



OPERATING LIGHT

1



EXTERNAL
REGULATION



FAST HYDRO

1 Only for vertical model

EXTRA FEATURES

Further customization is possible on factory-tailored production lots



HEAVY-DUTY
THERMOSTAT



POWER CABLE
AND PLUG

2



PROBE POCKET




HIGHER POWER

2 Only for 6 coils vertical model



DIMENSIONS

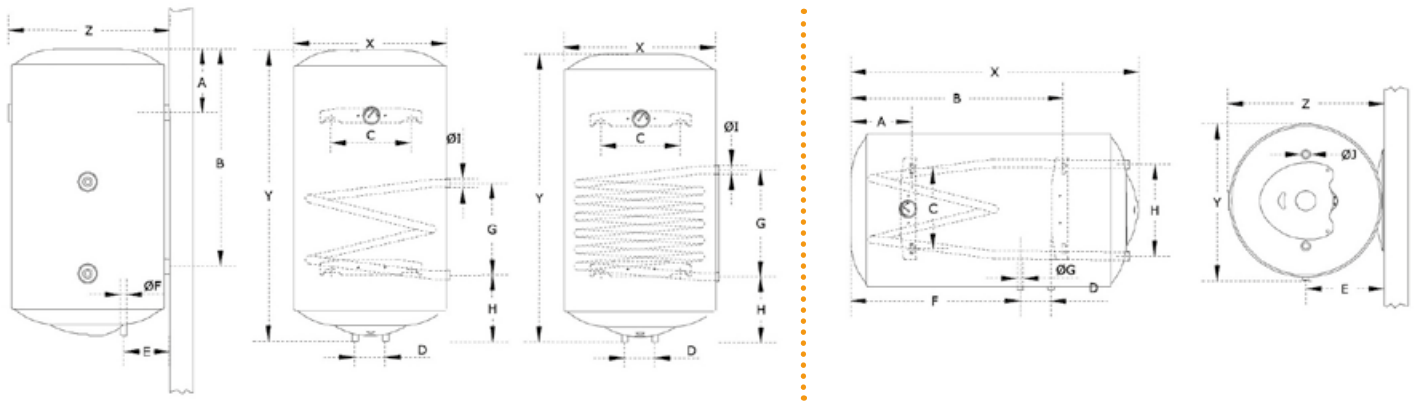

Vertical

Max operating pressure: 8 bar
Voltage: 220~240 V 50-60 Hz

Horizontal

TECHNICAL DATA

CALYPSO MT		VERTICAL 2 COILS				VERTICAL 6 COILS EXCHANGER				HORIZONTAL 2 COILS EXCHANGER			
		80	100	120	150	80	100	120	150	80	100	120	150
Dimensions	X	440	440	440	440	440	440	440	440	770	990	1135	1255
	Y	755	995	1130	1175	755	995	1130	1175	440	440	440	440
	Z	460	460	460	460	460	460	460	460	460	460	460	460
	A	185	185	190	190	185	185	190	190	180	200	190	200
	B	-	-	915	955	-	-	915	955	555	740	915	955
	C	265	265	265	265	265	265	265	265	265	265	265	265
	D	100	100	100	100	100	100	100	100	100	100	100	100
	E	130	130	130	130	130	130	130	130	230	230	230	230
	F	1/2" M	1/2" M	1/2" M	1/2" M	1/2"	1/2"	1/2"	1/2"	355	570	720	760
	G	240	240	240	240	380	380	380	380	1/2" M	1/2" M	1/2" M	1/2" M
	H	195	195	195	195	195	195	195	195	300	300	300	300
I	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	3/4" M	3/4" M	3/4" M	3/4" M	
Capacity	litres	80	100	120	150	80	100	120	150	80	100	120	150
Coil surface	m ²	0.15	0.15	0.15	0.15	0.4	0.4	0.4	0.4	0.15	0.15	0.15	0.15
Electric power	W	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	
Heating time ΔT 35° C	electric	2 h 18'	2 h 53'	3 h 28'	4 h 19'	2 h 18'	2 h 53'	3 h 28'	4 h 02'	2 h 18'	2 h 53'	3 h 28'	4 h 19'
	thermic	59'	1 h 14'	1 h 29'	2 h 10'	21'	26'	31'	39'	59'	1 h 14'	1 h 29'	2 h 10'
Weight	kg	24	28.5	32	33	26.5	31	34.5	35.5	20.5	25	28.5	29.5

Available also 1200 W and 2000 W stainless steel or 1500 W, 2000 W and 4000 W Blueforever