

ELETTROPOMPE AUTOADESCANTI JET INOX

SELFPRIMING JET INOX PUMPS

LIMITI D'IMPIEGO

- Pressione max. d'esercizio 6 bar
- Temperatura liquido fino a 35° C
- Temperatura ambiente fino a 40° C
- Altezza d'aspirazione manometrica fino a 8 mt.
- Servizio continuo

MOTORE

- Motore elettrico ad induzione a 2 poli ($n = 2850 \text{ min}^{-1}$)
- Isolamento Classe F
- Protezione IP 44

MATERIALI

- Corpo pompa Acciaio Inox
- Supporto motore Alluminio
- Girante Acciaio Inox
- Diffusore Noryl
- Flangia portatenuta Acciaio Inox
- Albero motore Acciaio Inox
- Tenute meccaniche Ceramica/Grafite



OPERATING CONDITIONS


- Max. working pressure 6 bar
- Liquid temperature up to 35°C
- Ambient temperature up to 40°C
- Total suction lift up to 8 mt.
- Continuous duty

MOTOR

- Two-Pole induction motor ($n = 2850 \text{ min}^{-1}$)
- Insulation Class F
- Protection IP 44

MATERIALS

- Pump body Stainless Steel
- Motor Support Aluminium
- Impeller Stainless Steel
- Diffuser Noryl
- Pump flange Stainless Steel
- Shaft with rotor Stainless Steel
- Mechanical seal Ceramic/Graphite

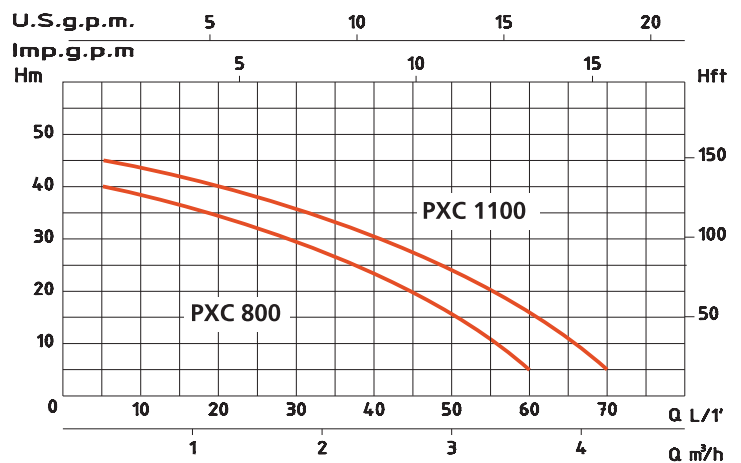

TIPO - TYPE	PXC 800	PXC 1100
P2	0,8 HP	1 HP
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	3,8 A	5 A
Q max.	60 l/1'	70 l/1'
H max.	40 m	45 m
Dnm - Dna	1"-1"	1"-1"