

---

# Catalogue

Heat pumps  
2023 / 2024



# Versatile and flexible **Rotenso solutions**

---


**AIR CONDITIONING** SYSTEMS

**RVF AIR CONDITIONING** SYSTEMS

**VENTILATION** SYSTEMS

**HEAT PUMPS** SYSTEMS

Always up-to-date catalogues  
on [rotenso.com](http://rotenso.com)



WE ARE **SOLUTION**



# Welcome to the **Premium Class**

---

**Advanced technology**

**Highest capacity**

**Wide range of options  
and accessories**

**Unique design**



**Ergonomic controllers**

**Durable and reliable**

**Excellent air filtration system**

**High energy efficiency class**



WE ARE **COOL** WE ARE **HEAT** WE ARE **COMFORT** WE ARE **AIR** WE ARE **ROTENSO**

# Table of contents

## Overview

|                                      |    |
|--------------------------------------|----|
| About Rotenso .....                  | 06 |
| Laboratory and quality control ..... | 08 |
| Future-proof heating .....           | 09 |
| Heat pumps – applications .....      | 09 |
| Keymark certificate .....            | 11 |
| Apply for subsidies .....            | 11 |

## Discover features of your heat pump

|  |    |
|--|----|
| Thermal comfort offered by a heat pump .....     | 15 |
| Air-to-water heat pumps .....                    | 16 |
| Core features .....                              | 16 |
| Advanced SKYR technology .....                   | 18 |
| DC Inverter control .....                        | 20 |
| Energy efficient BLDC Inverter motors .....      | 21 |
| BLDC Inverter twin rotary compressors .....      | 22 |
| High heating capacity at -15°C .....             | 23 |
| Provides heating at down to -25°C .....          | 23 |
| R32 – Environmentally friendly refrigerant ..... | 24 |
| Silent mode .....                                | 25 |
| SMART control systems .....                      | 26 |
| Customized schedule .....                        | 28 |
| Heat by nature .....                             | 30 |
| Smart Grid functionality .....                   | 30 |
| Zone management .....                            | 32 |
| Climate curve functionality .....                | 32 |
| Cascade unit arrangement .....                   | 33 |
| USB port for easy service .....                  | 33 |
| Heat pump characteristics (table) .....          | 34 |
| Heat pump features (table) .....                 | 35 |

## Offer

|  |    |
|--|----|
| The widest range of heat pumps on the market ..... | 36 |
| How to choose the right Rotenso heat pump? .....   | 38 |

|                                 |    |
|---------------------------------|----|
| <b>Aquami Series</b> .....      | 40 |
| Useful features .....           | 42 |
| Perfectly compact housing ..... | 44 |

|   |            |
|---|------------|
| Ergonomic products .....                | 45         |
| Floor drying .....                      | 45         |
| You control, it performs .....          | 46         |
| Aquami unit dimensions .....            | 48         |
| <b>Aquami solutions</b> .....           | 52         |
| Aquami Split solution .....             | 54         |
| Aquami All in Split solution .....      | 56         |
| Aquami Monoblock solution .....         | 58         |
| Aquami Big Mono solution .....          | 60         |
| Aquami Multi Split solution .....       | 62         |
| <b>Aquami Series Split</b> .....        | <b>64</b>  |
| <b>Aquami Series All in Split</b> ..... | <b>70</b>  |
| <b>Aquami Series Monoblock</b> .....    | <b>76</b>  |
| <b>Aquami Series Big Mono</b> .....     | <b>82</b>  |
| <b>Aquami Series Multi Split</b> .....  | <b>88</b>  |
| <b>Windmi Series</b> .....              | 94         |
| Useful features .....                   | 96         |
| Dedicated Oris controller .....         | 98         |
| All in the app .....                    | 99         |
| Windmi unit dimensions .....            | 100        |
| <b>Windmi solutions</b> .....           | 101        |
| Windmi Monoblock solution .....         | 102        |
| <b>Windmi Series Monoblock</b> .....    | <b>104</b> |
| <b>Heatmi Series</b> .....              | 110        |
| Useful features .....                   | 112        |
| Dedicated controller Atea .....         | 114        |
| App controlled .....                    | 115        |
| Heatmi unit dimensions .....            | 116        |
| <b>Heatmi solutions</b> .....           | 117        |
| Heatmi Split solution .....             | 118        |
| <b>Heatmi Series Split</b> .....        | <b>120</b> |
| <b>Airmi Series</b> .....               | 126        |
| Useful features .....                   | 128        |
| Matching housing colour .....           | 130        |
| Dedicated Tero controller .....         | 132        |
| App controlled .....                    | 133        |
| Airmi unit dimensions .....             | 134        |
| <b>Airmi solutions</b> .....            | 137        |

|  |            |                                |            |
|--|------------|--------------------------------|------------|
| Airmi Split solution .....                               | 138        | <b>DHW tanks .....</b>         | <b>176</b> |
| Airmi Monoblock solution .....                           | 140        | <b>Accessories .....</b>       | 182        |
| <b>Airmi Series Split .....</b>                          | <b>142</b> | Aquami wired controllers ..... | 184        |
| <b>Airmi Series Monoblock .....</b>                      | <b>148</b> | Windmi wired controllers ..... | 185        |
| <b>Tanks .....</b>                                       | 154        | Heatmi wired controllers ..... | 185        |
| Thermos Store / Store Plus dimensions .....              | 156        | Airmi wired controllers .....  | 185        |
| Thermos Ceramic dimensions .....                         | 158        | Sensors, modules .....         | 186        |
| Thermos Inox / Twin Inox / Dual Inox<br>dimensions ..... | 160        | Temperature stations .....     | 186        |
| <b>Buffer and DHW Tanks solutions .....</b>              | 163        | Pump stations .....            | 186        |
| Thermos Store / Plus solution .....                      | 164        | Manifolds .....                | 187        |
| Thermos Ceramic solution .....                           | 166        | Valves .....                   | 188        |
| Tank Inox solution .....                                 | 168        | Dirt separators .....          | 189        |
| Tank Twin Inox / Dual Inox solution .....                | 170        | Circulation pumps .....        | 189        |
| <b>Buffer tanks .....</b>                                | <b>172</b> | Rubber / steel supports .....  | 190        |



# About Rotenso

---

Our mission is to provide state-of-the-art air conditioning, ventilation and heating solutions powered by highly efficient, energy-saving inverter technology. Thanks to years of investment in technology development, Rotenso devices are among the most innovative solutions for building temperature control and adjustment.

The Rotenso brand consistently works to strengthen its well-established position as a supplier of modern, reliable, and environmentally friendly air conditioning systems and air-to-water heat pumps. Every year, Rotenso's offer is expanded with new units that feature increasingly better technological properties and modern design.



## Internal

service network in Poland



## Free of charge

commissioning by  
authorized service\*



## 24 h service

response time\*



## 5 year warranty\*

\* detailed conditions described in the warranty card



## You are always at the heart of what we do

---

We use technological innovations for the sake of health and comfort offered by the systems we provide.

The ever-increasing capacity and energy efficiency of our products is a response to the growing need to rationalize the costs of energy and take care of the environment.



---

**Reliable**  
products

---

Rotenso equipment combines top components with proven solutions covered by a 5-year warranty.



---

**Professional**  
support

---

Choose the Rotenso solutions to receive full technical and service support at every stage of the investment.



---

**Industry**  
leader

---

The general distributor of the ROTENSO brand is THERMOSILESIA – a reliable partner and HVAC industry leader.

# Laboratory and quality control

|              |             |                      |           |         |
|--------------|-------------|----------------------|-----------|---------|
| 89           | 5           | 34                   | 3000      | 6000+   |
| laboratories | R&D centers | leading technologies | engineers | patents |

## 3000 engineers and supervisors of:

- Quality system management
- Supplier's quality warranty
- Component quality control
- Process quality control
- Final quality check
- Customer service improvement



8

The company's business model is based upon three values:

1. Reliability
2. Quality
3. Development

whose defined goal is to implement the two projects:

### Rotenso Business DESIGN

The primary goal of this project is to act in responsible manner according to the principles of partnership. Immediate assistance, direct contact and reliable transportation result in satisfactory business relations.

### Rotenso Eco passport DESIGN

Ecology is Rotenso's top priority. Low energy consumption equipment of the lowest possible weight and recyclable packaging. This goal is achieved by optimizing the production process.



Transport



Assistance



Contact



Partnership



Energy



Packaging



Recycling



Weight

# Future proof heating

Low operating costs

Convenient app control

Energy efficient



Maintenance-free heat source

Allows heating at temperature as low as -25°C

Cooling function


Silent devices

9

## Heat pumps - applications

Heat pumps are a modern and efficient way of space heating and domestic hot water preparation. Principles of heat pump operation are very simple. The heat pump absorbs the heat accumulated in the air and, through its refrigeration system, transfers it back to the water that circulates in the heating system. Heating with the air source heat pump is based on the absorption of energy from the environment (**up to 75%**) and combining it with electric energy in the amount (ca. 25%) required to cover the demand.

Over the past few years, air source heat pumps have become increasingly popular, displacing traditional solutions based on fossil fuels (coal, natural gas, fuel oil). They are used in both newly built and modernized facilities.

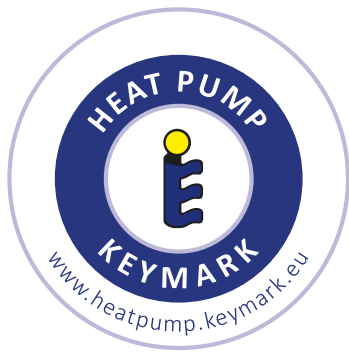

## Certyfikat **Keymark**

---

The Rotenso brand consistently aligns with the highest standards possible. Our products prioritize energy efficiency, safety, and user comfort, ensuring that our heat pump users are fully satisfied over their product's lifetime.

A testament to our product quality is the European KEYMARK Quality Certificate, which demonstrates Rotenso products' compliance with even the most rigorous standards.





# Apply for **subsidies**

---

## **For whom?**

For owners or co-owners of single-family residential buildings, or apartments separated within the single-family residential buildings with a separate land and mortgage register number.



## **Clean Air Programme**

The Clean Air Programme is a nationwide Polish programme to subsidize the replacement of inefficient solid fuel heat sources. It supports modern, environmentally friendly solutions, including the purchase and installation of heat pumps.

For detailed information see: [www.czystepowietrze.gov.pl](http://www.czystepowietrze.gov.pl)

# WE ARE FUTURE



12

Source of energy all year round:  
for space heating and cooling,  
and constant access to domestic  
hot water.


**Discover features of  
your heat pump.**

---






## Space heating

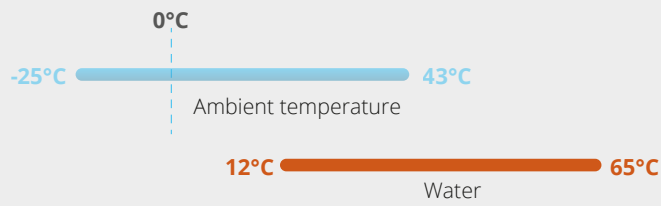

- At outdoor temperature as low as -25°C
- Leaving water temperature up to 65°C




## Domestic hot water

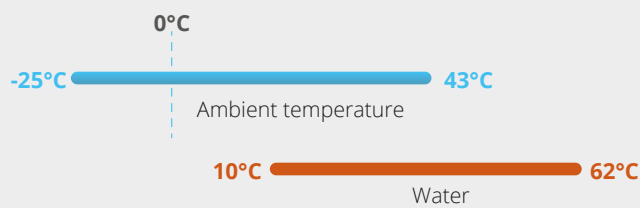

- At outdoor temperature as low as -25°C
- Leaving water temperature up to 62°C



## Space cooling

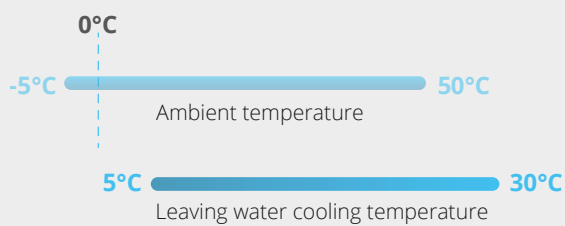

- At outdoor temperature as low as -5°C
- Leaving water temperature down to 5°C





# HEAT PUMPS

## Thermal comfort **offered by a heat pump**

---

**Air-to-water heat pumps are currently the most environmentally friendly heat source available. At the same time they offer space cooling feature.**

A central heating system combined with underfloor heating, wall heating or traditional radiators powered by a heat pump and additionally, for example, fan coil units, provides effective heating even at extremely low temperatures in winter and air conditioning in summer.

A maintenance-free system based on an air-to-water heat pump guarantees low operating costs, year-round thermal comfort and domestic hot water preparation.

# Air-to-water heat pumps

---

Rotenso offers one of the most comprehensive ranges of air-to-water heat pumps on the market. A wide range of capacities, from 4 kW to 180 kW, allows to select optimum heat pump power and thus reduce operating costs in the future.

Completely maintenance-free, year-round heat pump guarantees thermal comfort regardless of the season.



16

## Core features

---



Maximum supply water  
temperature up to 65°C



Integrated Wi-Fi module  
for heat pump remote control



**A**  
+++

High capacity efficient heating.  
Energy efficiency: A+++

**COP**  
**5,25**


Maximum  
COP 5,25




Unique fan design provides  
high efficiency with lower  
noise levels (35dB(A))



Operating range  
down to -25°C



Typical blade pattern




Rotenso unique blade pattern


# Advanced SKY<sup>R</sup> technology

## Unique fan design and improved duct

Innovative design of the fan effectively reduces airflow resistance and noise levels. The optimized air duct ensures uniform air flow and 30% decrease in energy consumption



Standard air duct



High-efficiency air duct



## DC Inverter sine wave control

DC Inverter sine wave control enables high energy efficiency and lower noise levels. Optimization technology has also reduced energy consumption.

Capacity %



Full control of the Inverter



## DC INVERTER rotary compressors

Superior compressor capacity guarantees unprecedented levels of efficiency. The unique design minimizes vibration during the operation of moving parts, thus effectively reducing noise levels.

## Internally grooved pipes


Dense grooves on the inside of copper pipes increase the heat transfer area. Increasing number of grooves from 45 to 54 resulted in significant capacity improvements.

# Digital Inverter SKY<sup>R</sup>


## DC Inverter Control

Depending on demand, the unit management system can select one of 30 compressor frequency ranges so as to combine maximum unit efficiency with minimum energy consumption.


Standard inverter operation mode

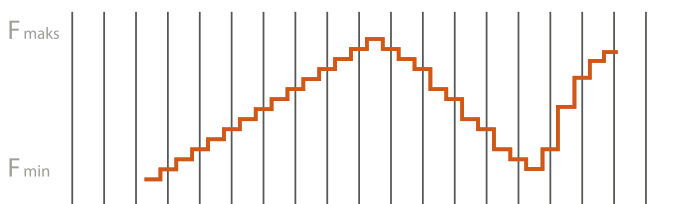


Inverter operation based on precision control algorithm

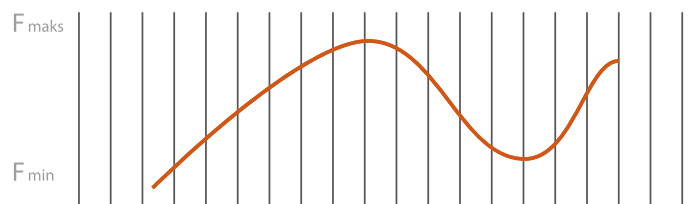

Temperature chart

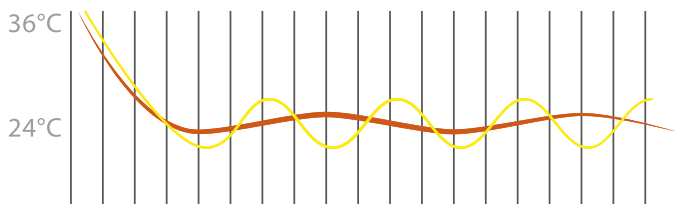

- Inverter operation based on precision control algorithm
- Standard inverter operation mode

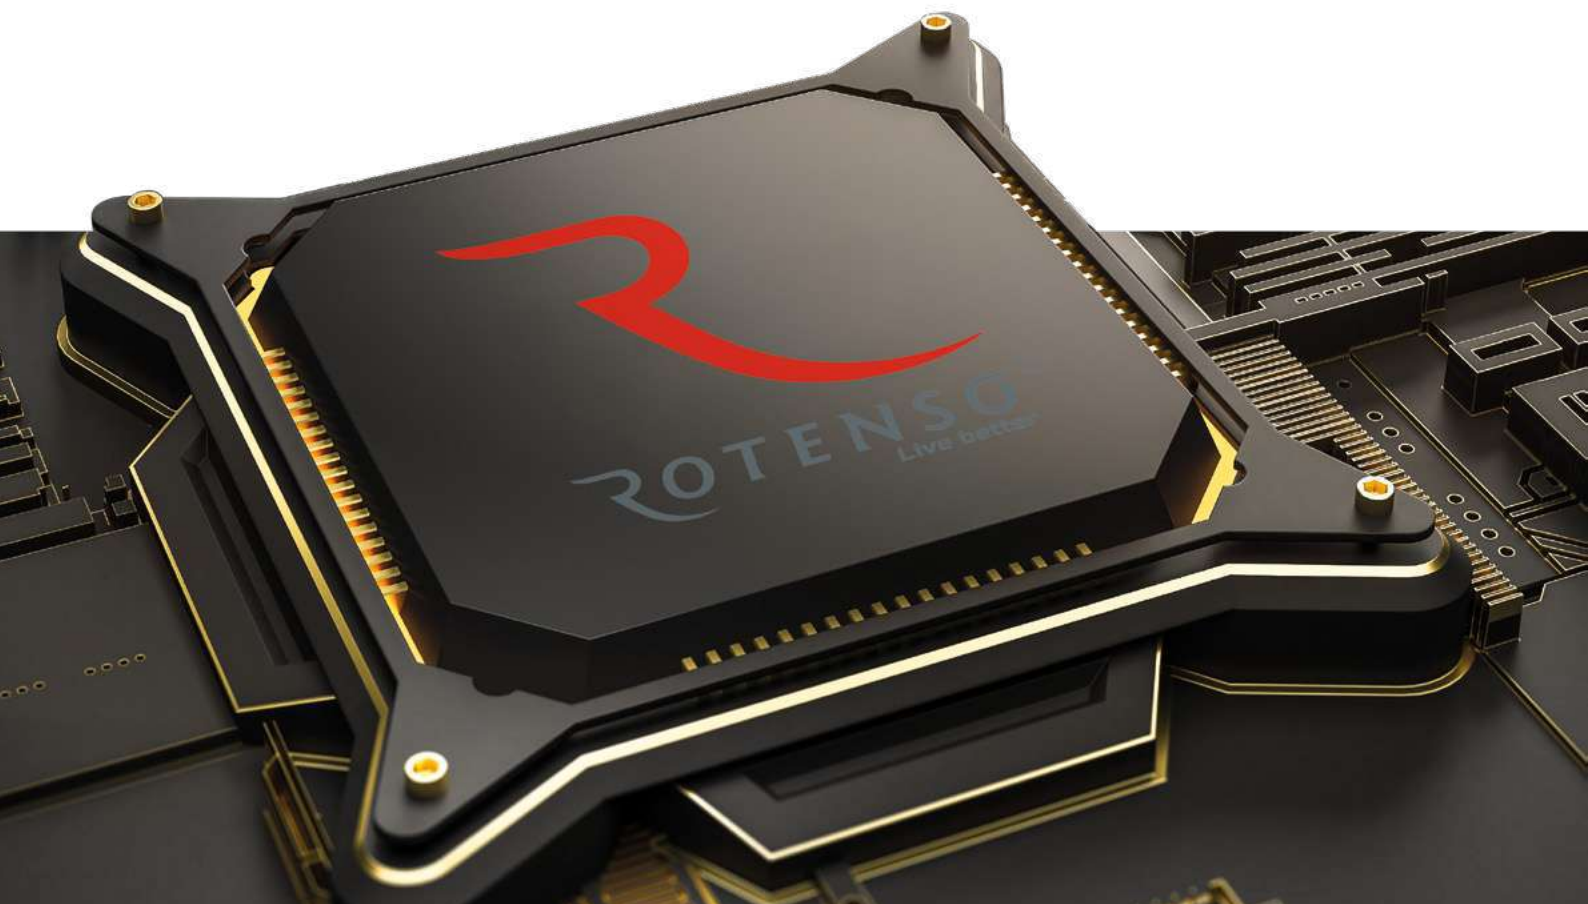

# Energy efficient BLDC SKY<sup>R</sup> motors

## DC INVERTER sine wave control

High energy efficiency and quiet operation is achieved through the DC Inverter sine wave control.


## Motor with vector-shaped magnet

The motor generates 90% of heat pump total energy consumption. Internal structure of magnet motors used in Rotenso products was optimized to achieve 3x increase in magnet power and 5x increase in coercion.

It resulted in increased motor rotation speed at lower energy consumption. As a result, motor efficiency increased by 3% compared to conventional DC motors.



Vector-shaped motor



Precise motion, high efficiency

The energy-efficient BLDC motor allows indoor and outdoor units to use multiple fan speeds which lowers energy consumption and reduces the time required to reach the desired temperature. 12 speed levels of the Brushless DC motor / BLDC help to adjust its capacity to indoor conditions perfectly.

Modern components have been used to reduce noise levels while maintaining high efficiency and low energy consumption.



SKY<sup>R</sup>


I-Balance

## BLDC SKY<sup>R</sup> motors


By optimizing the structure, fan's SKY<sup>R</sup> BLDC motor offers 10% higher efficiency with a 35% reduction in size.



Standard DC motor



Less stable operation, lower efficiency



# Twin rotary compressors

## **BLDC Inverter**

---

Superior compressor capacity guarantees unprecedented level of efficiency. The unique design minimizes vibration during the operation of moving parts, thus effectively reducing noise levels. This state-of-the-art solution ensures many years of energy-efficient and trouble-free operation.


22


Modern design of refrigerant circuit uses improved radiative cooling technology to cool the PHE / plate heat exchanger. This solution significantly increases capacity of the outdoor unit and makes its operation more stable at higher ambient temperatures.



### **Benefits**

- Highly efficient BLDC motor
- Better balance, lower vibration and consequently less noise
- Superior stability of moving parts

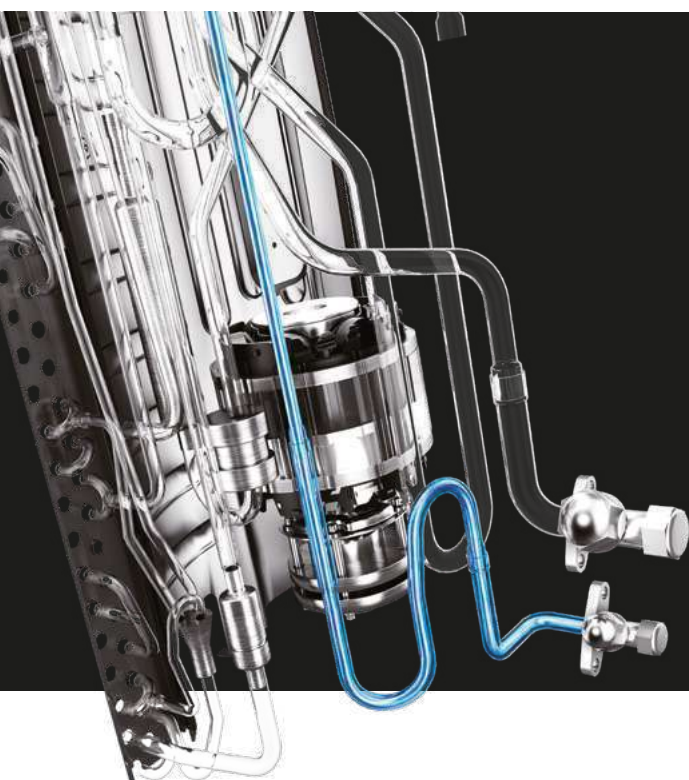

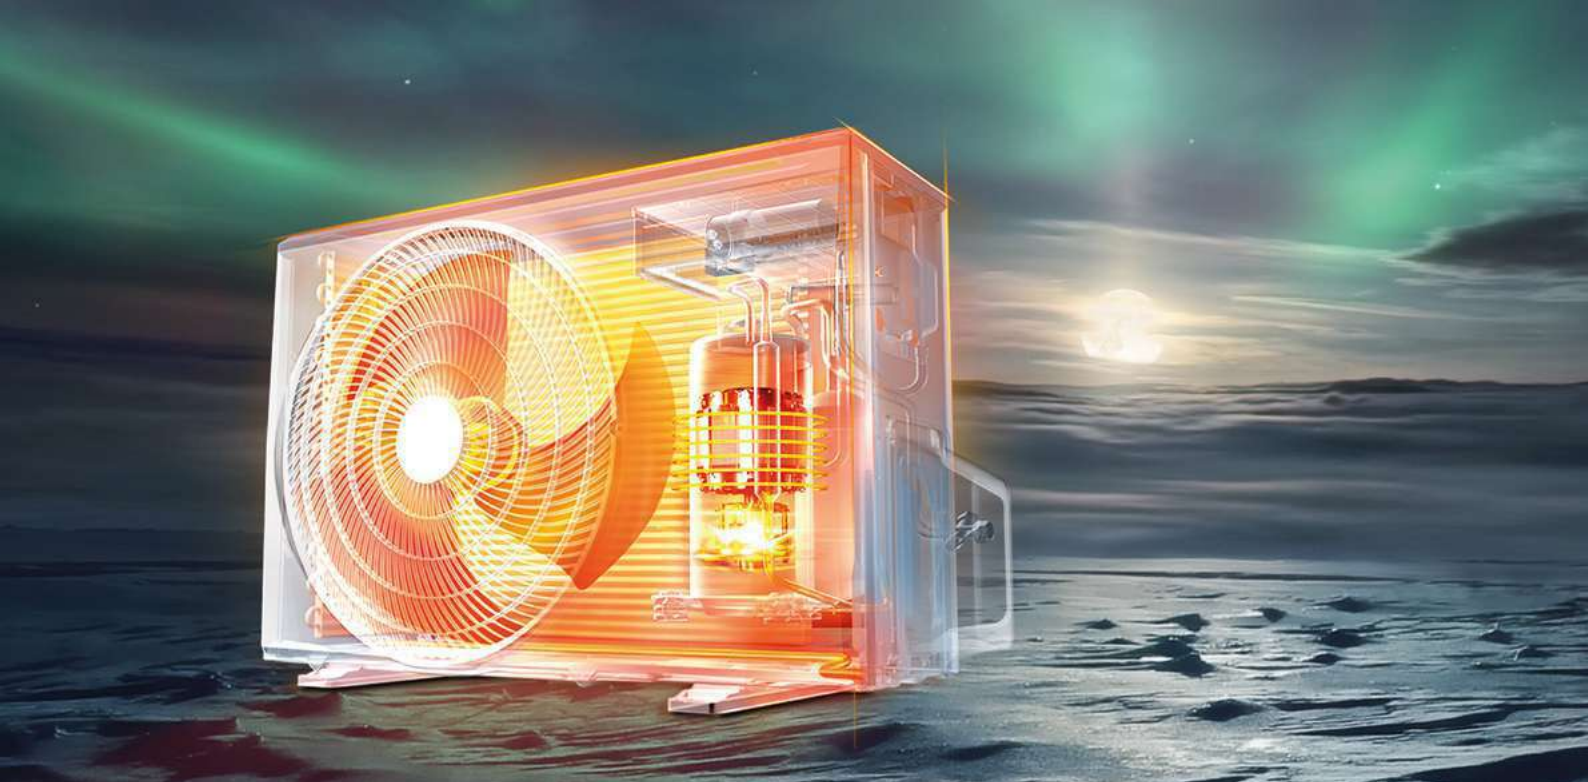

## High heating capacity at -15°C

The heat pump ensures stable operation without engaging supplemental electric heater and performs well to keep warm even at ambient temperature as low as -15°C.

### Copper pipes

Dense grooves on the inside of copper pipes increase the heat transfer area. Increasing number of grooves from 45 to 54 resulted in significant capacity improvements.



### Ice forming eliminated


Integrated drip tray heater quickly melts and removes ice from the outdoor unit to ensure its stable operation and superior heating capacity.

## Provides heating at down to -25°C

Perfect solutions for the harshest frosts. The Rotenso heat pump provides high heating capacity at ambient temperatures down to -25°C.

### Cold proof

The compressor heater prepares the compressor to operate in heating mode in trouble-free and efficient manner exactly when you need it.

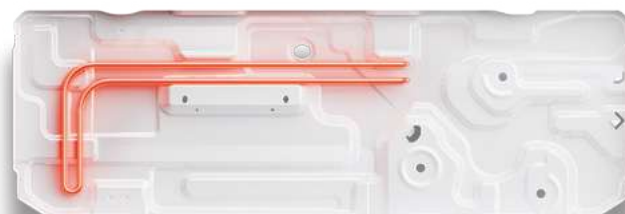

# R32 - refrigerant environmentally friendly

- Higher heat transfer coefficient and better capacity.
- The system requires less refrigerant.
- Lower purchase and operating costs, better availability.
- Lower GWP (global warming potential).
- Lower carbon dioxide emission.

## ERP directive


Seasonal space heating, energy efficiency.


**A+++**

- At supply temperature of **35°C**

**A++**

- At supply temperature of **55°C**

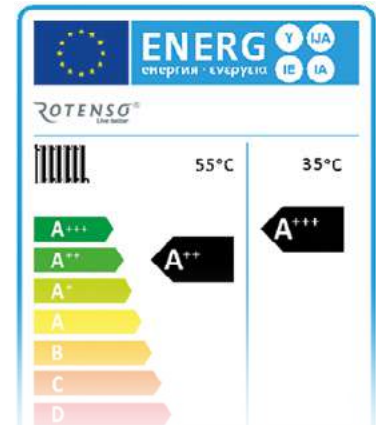

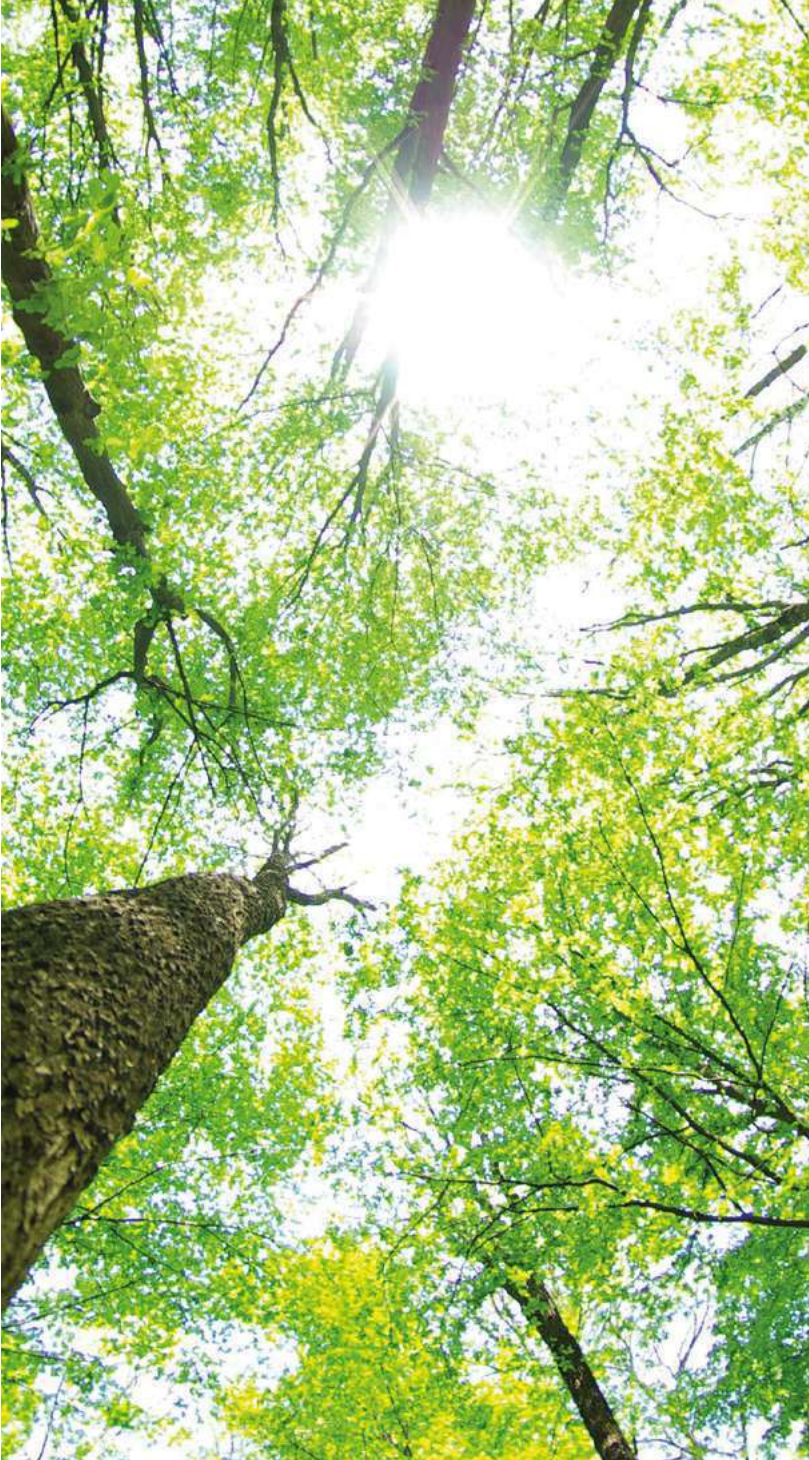

# Silent mode

As quiet as hum of the forest

Two-step Silent mode provides greater comfort. Level 2 of the Silent mode provides minimum sound power of 35 dB(A).



Twin rotary DC compressor



Triple noise reduction



Unique fan design




Optimized piping design

The unit generates only 35dB(A) of sound power as measured 3 meters away.



Aquami Monoblock AQM60X1

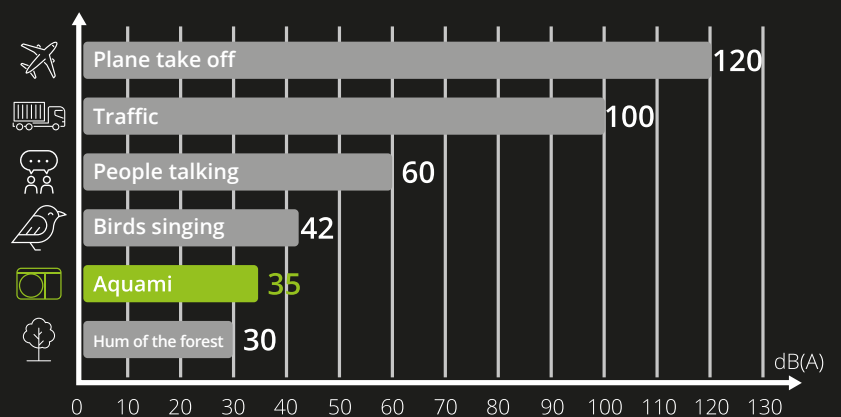



## SMART control systems

26

### Use the application to:

- Set up schedule and timer,
- Activate second temperature control zone,
- Monitor system status,
- Check heat pump status and operation mode,
- Set temperature and operation mode,
- Easily activate the Silent mode or Vacation mode.

### Check heat pump status and operation mode

You can quickly view the heat pump current status and operation mode, e.g. on/off, heating/cooling, electric heater on, and in the case of a hybrid system (pump + additional heat source) you can check whether such heat source is on.

### Download the right app for specific series:

**AQUAM**  
SERIES




iLetComfort

**WINDM**  
SERIES

**HEATM**  
SERIES

**AIRM**  
SERIES



TUYA SMART



## Heat pump operation tracking

Monitor important parameters, including compliance with the selected heating curve and temperature of indoor air, as well as temperature of water in the system and hot water vessel.



Control the pump remotely



Discover money saving tips



Track energy consumption

## Customized schedule

---

Enjoy thermal comfort returning home where temperature exactly matches your preferences. Set up economic operation mode when you are away from home or on vacation.

With customized scheduling, the system will automatically respond to your needs providing you with comfort and savings.

### Eco mode

Following the preset heating curves the heat pump will reduce its output to minimize rated input and make its operation as economic as possible.

### Two control zones

This functionality helps to easily set up temperature independently for two zones, for example, common spaces on the ground floor and bedrooms upstairs. Independent management and control of two zones will be helpful for combinations of underfloor heating and radiators.





### Home Vacation mode

This useful temporary mode allows you to make changes to your programmed fixed schedules for specific period of time to cover any unforeseen modifications in your plans.

### Vacation mode

Set the appropriate operating parameters to keep the building in a great shape and save money while you are away from home.

# Heat by nature

By choosing renewable energy sources you are taking care of the environment, your health and your immediate surroundings. Energy from the air used by air-to-water heat pumps backed by the energy from the sun is your contribution to inhibiting climate change and saving money every day.

## 30 Smart Grid functionality

Heat pump controller is designed to work with the „Smart Grid“.

With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.



Domestic hot water (DHW) mode in on and water tank temperature is set to 70°C.



Normal operation



The Rotenso unit operates for a certain period of time and then shuts down.



### Solar collectors

Solar collectors convert solar energy into heat, which can be used, for example, to heat domestic hot water off season.

### Photovoltaic panels

Photovoltaic panels convert the sun rays into electricity, and thus supply the heat pump with energy, so you don't have to worry about the cost of heating your home and water.



### Heat pump combined with fan coil unit

Add fan coil units to your heat pump based system to create an effective air conditioning system in your building without the cost of purchase, installation and maintenance of a separate system.


### Heating in winter, cooling in summer

Eco-friendly, energy-efficient and maintenance-free heat pumps ensure thermal comfort in your building all year round, whether it means heating in the winter or air-conditioning in the summer.

# Zone management

Two heating circuits provide more accurate temperature control of the low temperature zone.

A DC water pump provides precision control of water flow, while adjustment by a three-way solenoid valve ensures stable temperature.

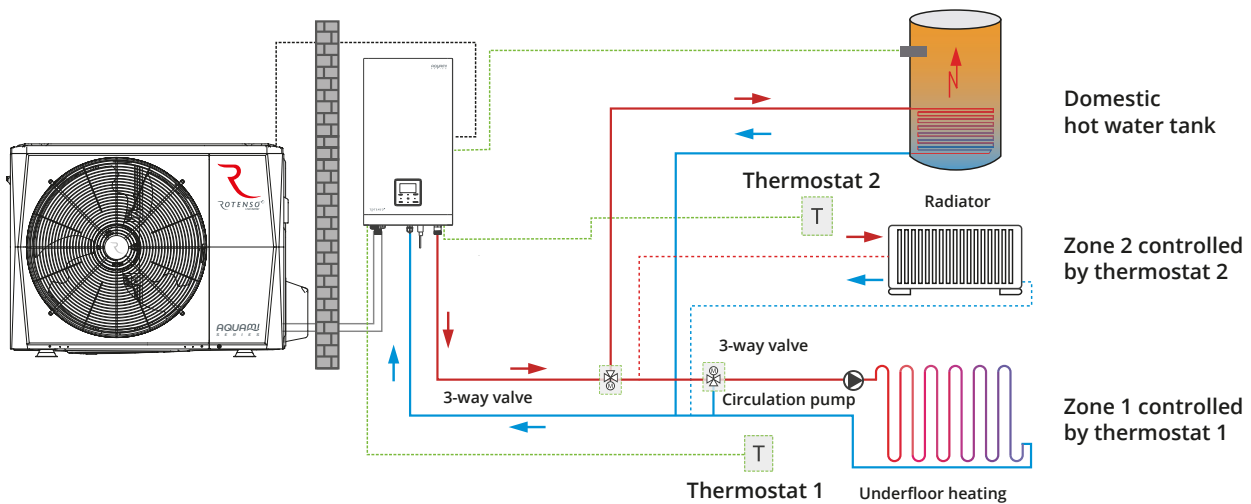


32

# Climate curve functionality

The control system allows automatic or manual adjustment of the heating curve depending on climatic conditions.


## Heating mode

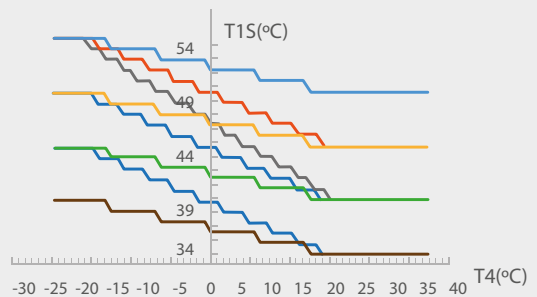


# Cascade unit arrangement

Cascade system design is a perfect solution if efficiency of the system must be increased due to changes in the heating/cooling demand of the building.

Up to 6 units in a group can be controlled with one controller.

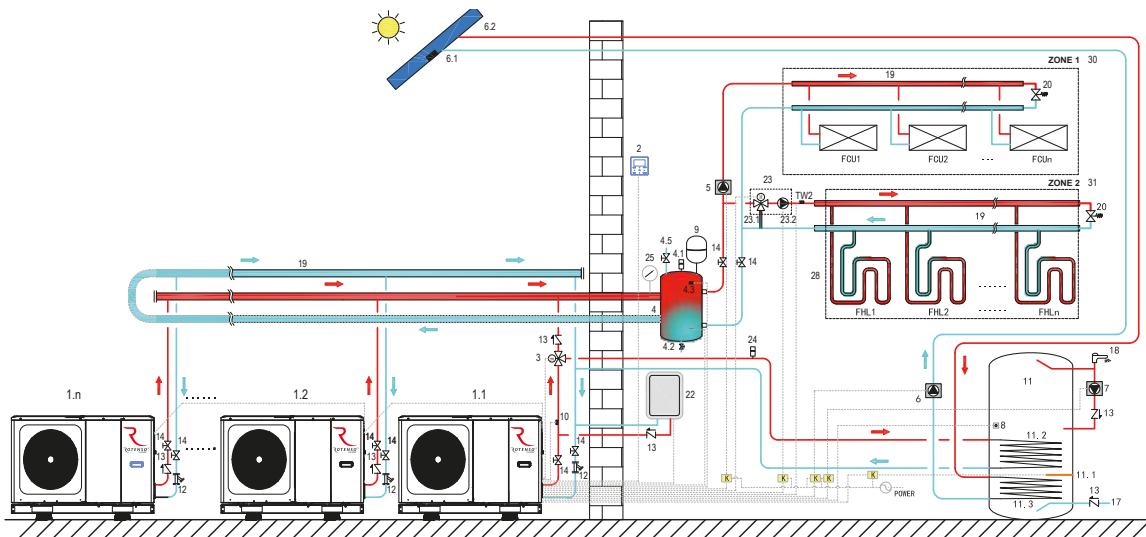


## Cooling mode

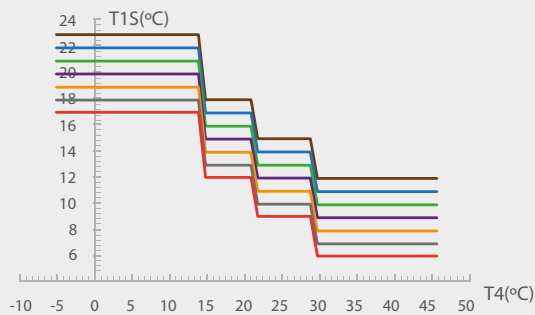

## USB port of easy service

Quick software update with a flash drive makes it easy to copy set parameters between heat pump controllers.

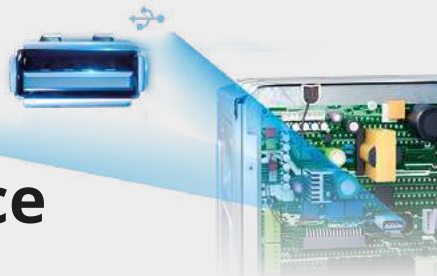

# Heat pump characteristics

|                                      |   | AQUAMI                     | WINDMI    | HEATMI      | AIRMI            |
|--------------------------------------|---|----------------------------|-----------|-------------|------------------|
| Standard equipment                   | Twin rotary inverter compressor                                   | •                          | •         | •           | •                |
|                                      | Supplementary integrated electric heater <sup>(1)</sup>           | •                          | •         | •           | •                |
|                                      | Year-round operation package (drip tray heater, crankcase heater) | •                          | •         | •           | •                |
|                                      | Outdoor unit drip tray heater                                     | •                          | •         | •           | •                |
|                                      | Compressor crankcase heater                                       | •                          | •         | •           | •                |
|                                      | Diaphragm vessel  | •                          | •         | •           | •                |
|                                      | DHW temperature sensor  | •                          | •         | •           | •                |
|                                      | Y mesh filter   | •                          | •         | •           | •                |
|                                      | Indoor unit drip tray   | •                          |           | •           | •                |
| Quality                              | Keymark certificate   | • <sup>(10)</sup>          | •         | •           | • <sup>(9)</sup> |
|                                      | CE certificate  | •                          | •         | •           | •                |
|                                      | Energy efficiency class at 35°C <sup>(2)</sup>                    | A+++                       | A+++      | A+++        | A+++             |
|                                      | Energy efficiency class at 55°C <sup>(3)</sup>                    | A++                        | A++       | A++         | A++              |
|                                      | Eligible for the Clean Air Polish regional subsidy programmes     | •                          | •         | •           | •                |
|                                      | Eligible for the My Heat Polish regional subsidy programmes       | •                          | •         | •           | •                |
|                                      | 5-year warranty   | •                          | •         | •           | •                |
|                                      | Maximum length of the cooling system <sup>(4)</sup>               | 30 m / 80 m                | -         | 30 m        | 15 m             |
| SLIM housing – 270 mm <sup>(5)</sup> | •   |                            | •         | •           |                  |
| Controller                           | Silent mode   | 35 dB(A)                   | - 3 dB(A) | 35 dB(A)    | - 6 dB(A)        |
|                                      | Silent function   | •                          | •         | •           | •                |
|                                      | Wired controller  | •                          | •         | •           | •                |
|                                      | Colour controller interface                                       |                            |           | • *         |                  |
|                                      | Wi-Fi module  | •                          | •         | •           | •                |
|                                      | LCD display   | •                          | •         | •           | •                |
|                                      | Configurable daily schedules                                      | •                          | •         | •           | •                |
|                                      | Number of daily settings <sup>(6)</sup>                           | 6                          | 1         | 6           | 6                |
|                                      | Configurable weekly schedules                                     | •                          | •         | •           | •                |
|                                      | Out-of-home Vacation mode   | •                          | •         | •           | •                |
|                                      | Home Vacation mode  | •                          | •         | •           | •                |
|                                      | Menu in English   | •                          |           | •           | •                |
|                                      | Screen lock   | •                          | •         | •           | •                |
|                                      | Parental lock   | •                          | •         | •           |                  |
|                                      | Audible alarm   | •                          | •         | •           | •                |
|                                      | Integrated temperature sensor <sup>(7)</sup>                      | •                          | •         | •           | •                |
|                                      | Adjustable water temperature                                      | •                          | •         | •           | •                |
|                                      | Adjustable air temperature  | •                          | •         | •           | •                |
|                                      | 2 heating control zones   | •                          |           | •           | •                |
|                                      | Floor drying function   | •                          |           | •           |                  |
|                                      | Floor protection function   | •                          |           | •           |                  |
|                                      | Power limitation function   | •                          |           | •           |                  |
|                                      | Number of power limitation function configurations to choose from | 8                          |           | 8           |                  |
| Climate curve                        | •   | •                          | •         | •           |                  |
| Number of possible curves            | 16 + 16 + 1   | 11 + 2 + 2                 | 8         | 16 + 16 + 2 |                  |
| Application                          | Dedicated application   | •                          | •         | •           | •                |
|                                      | Application   | iLetComfort / Smart Home * | Tuya      | Tuya        | Tuya             |
|                                      | 2 heating control zones   | •                          |           | •           | •                |
|                                      | DHW priority mode   | •                          | •         | •           | •                |
|                                      | Energy consumption tracking                                       | •                          |           | •           |                  |
|                                      | Configurable daily schedules                                      | •                          | •         | •           | •                |
|                                      | Configurable weekly schedules                                     | •                          | •         | •           | •                |

|     |   | AQUAMI | WINDMI | HEATMI | AIRMI |
|-----|---|--------|--------|--------|-------|
| DHW | Fast DHW heating function                   | •      | •      | •      | •     |
|     | DHW circulation pump operation schedule     | •      |        | •      |       |
|     | Number of circulation pump settings per day | 12     |        | 12     |       |
|     | Disinfection                                | •      | •      | •      | •     |

## Heat pump features

| Feature |  | AQUAMI              | WINDMI | HEATMI          | AIRMI            |
|---------|--|---------------------|--------|-----------------|------------------|
| Feature | Fast DHW heating function                                | •                   | •      | •               | •                |
|         | DHW circulation pump operation schedule                  | •                   |        | •               |                  |
|         | Number of circulation pump settings per day              | 12                  |        | 12              |                  |
|         | Disinfection   | •                   | •      | •               | •                |
|         | Efficient heating  | •                   | •      | •               | •                |
|         | Integrated USB port for updates                          | •                   |        |                 |                  |
|         | Energy meter   | •                   |        |                 |                  |
|         | Dry contact  |                     | •      |                 |                  |
|         | Forced defrost (manual)                                  | •                   | •      |                 | •                |
|         | MODBUS protocol  | •                   | •      | •               | •                |
|         | Number of units in MODBUS                                | 16                  | 32     | 18              | 16               |
|         | Heating  | •                   | •      | •               | •                |
|         | Heating at low temperature down to -25°C                 | •                   | •      | •               | •                |
|         | Cooling  | •                   | •      | •               | •                |
|         | DHW  | •                   | •      | •               | •                |
|         | Maximum leaving water temperature in heating mode [°C]   | 65/60 <sup>69</sup> | 62     | 65              | 65               |
|         | Maximum leaving water temperature in DHW mode [°C]       | 60/55 <sup>69</sup> | 62     | 60              | 60               |
|         | Minimum leaving water temperature in cooling mode [°C]   | 5                   | 5      | 5               | 7                |
|         | Eco mode   | •                   | •      | •               |                  |
|         | Smart Grid functionality                                 | •                   |        | •               | •                |
|         | Power limitation function                                | •                   |        |                 |                  |
|         | Environmentally friendly refrigerant R32                 | •                   | •      | •               | •                |
|         | Compact indoor split unit housing                        | 270                 | -      | 270             | 273              |
|         | SLIM housing - 270 mm                                    | •                   |        | •               |                  |
|         | Professional customer service                            | •                   | •      | •               | •                |
|         | Prepared to install thermostats                          | •                   | •      | •               | •                |
|         | Prepared to combine the system with photovoltaic panels  | •                   | •      | •               | •                |
|         | Prepared to combine the system with solar panels         | •                   | •      | •               | •                |
|         | Prepared to connect additional heat source (e.g. boiler) | •                   | •      | •               | •                |
|         | Prepared to create a cascade system                      | •                   |        | •               | •                |
|         | Maximum number of units in a cascade system              | 6 (up to 180 kW)    |        | 8 (up to 80 kW) | 8 (up to 128 kW) |

1. Not available in Aquami Big Mono  
2. Aquami Big Mono 30 kW and Aquami Multi Split A++  
3. Aquami Big Mono 30 kW and Aquami Multi Split A+  
4. 30 m for Aquami Split, All in Split, 80 m for Aquami Multi Split.  
5. The depth of Airmi indoor unit is 273 mm.  
6. For Windmi pumps more settings are available in the application.

7. This sensor cannot be used for control in the Multi system.  
8. The second value applies to Aquami Big Mono and Aquami Multisplit.  
9. Applies to Airmi Monoblock.  
10. Does not apply to Aquami Big Mono and Aquami Multi Split.

\* Smart Home - only for Aquami Multi.

The widest range of  
**Rotenso heat pumps**  
on the market

---



# AQUAMI S E R I E S

Type: air-to-water heat pump  
Solutions: **SPLIT, MONOBLOCK, ALL IN SPLIT, BIG MONO, MULTI SPLIT**



# WINDMI S E R I E S

Type: air-to-water heat pump  
Solutions: **MONOBLOCK**



# HEATMI S E R I E S

Type: air-to-water heat pump  
Solutions: **SPLIT**



# AIRMI S E R I E S

Type: air-to-water heat pump  
Solutions: **SPLIT, MONOBLOCK**



# How to choose the right Rotenso heat pump?

1

Is there a room or enough space to install the hydronic module inside the building?

**YES!**

Choose the SPLIT Type heat pump

**NO!**

Choose the MONOBLOCK Type heat pump

2

What are you going to use your heat pump for?

Choose the **SPLIT** Type heat pump

- AQUAMI SPLIT > [p.64](#)
- HEATMI SPLIT > [p.120](#)
- AIRMI SPLIT > [p.142](#)

**Heating of the living space only**

Choose the **MONOBLOCK** Type heat pump

- AQUAMI MONOBLOCK > [p.76](#)
- WINDMI MONOBLOCK > [p.104](#)
- AIRMI MONOBLOCK > [p.148](#)





Choose the **ALL IN SPLIT** heat pump with integrated domestic water tank:

- AQUAMI ALL IN SPLIT > [p.70](#)

Choose the **SPLIT** heat pump with domestic water tank:

- AQUAMI SPLIT > [p.64](#)
- HEATMI SPLIT > [p.120](#)
- AIRMI SPLIT > [p.142](#)
- THERMOS INOX > [p.176](#)
- THERMOS CERAMIC > [p.176](#)

Choose the **MULTI** Type heat pump to provide heating (air-to-water heat pump) and connect air-conditioning units (air-to-air heat pump)

- AQUAMI MULTI SPLIT > [p.88](#)

## Heating of the living space and domestic water

## Heating and cooling of the living space

Choose the **MONOBLOCK** Type heat pump with domestic water tank

- AQUAMI MONOBLOCK > [p.76](#)
- WINDMI MONOBLOCK > [p.104](#)
- AIRMI MONOBLOCK > [p.148](#)
- THERMOS INOX > [p.176](#)
- THERMOS CERAMIC > [p.176](#)

# WE ARE FUTURE

40


AQUAMI  
S E R I E S

Split, All in Split, Monoblock,  
Big Mono, Multi Split.

**Rotenso Aquami Series.**

---



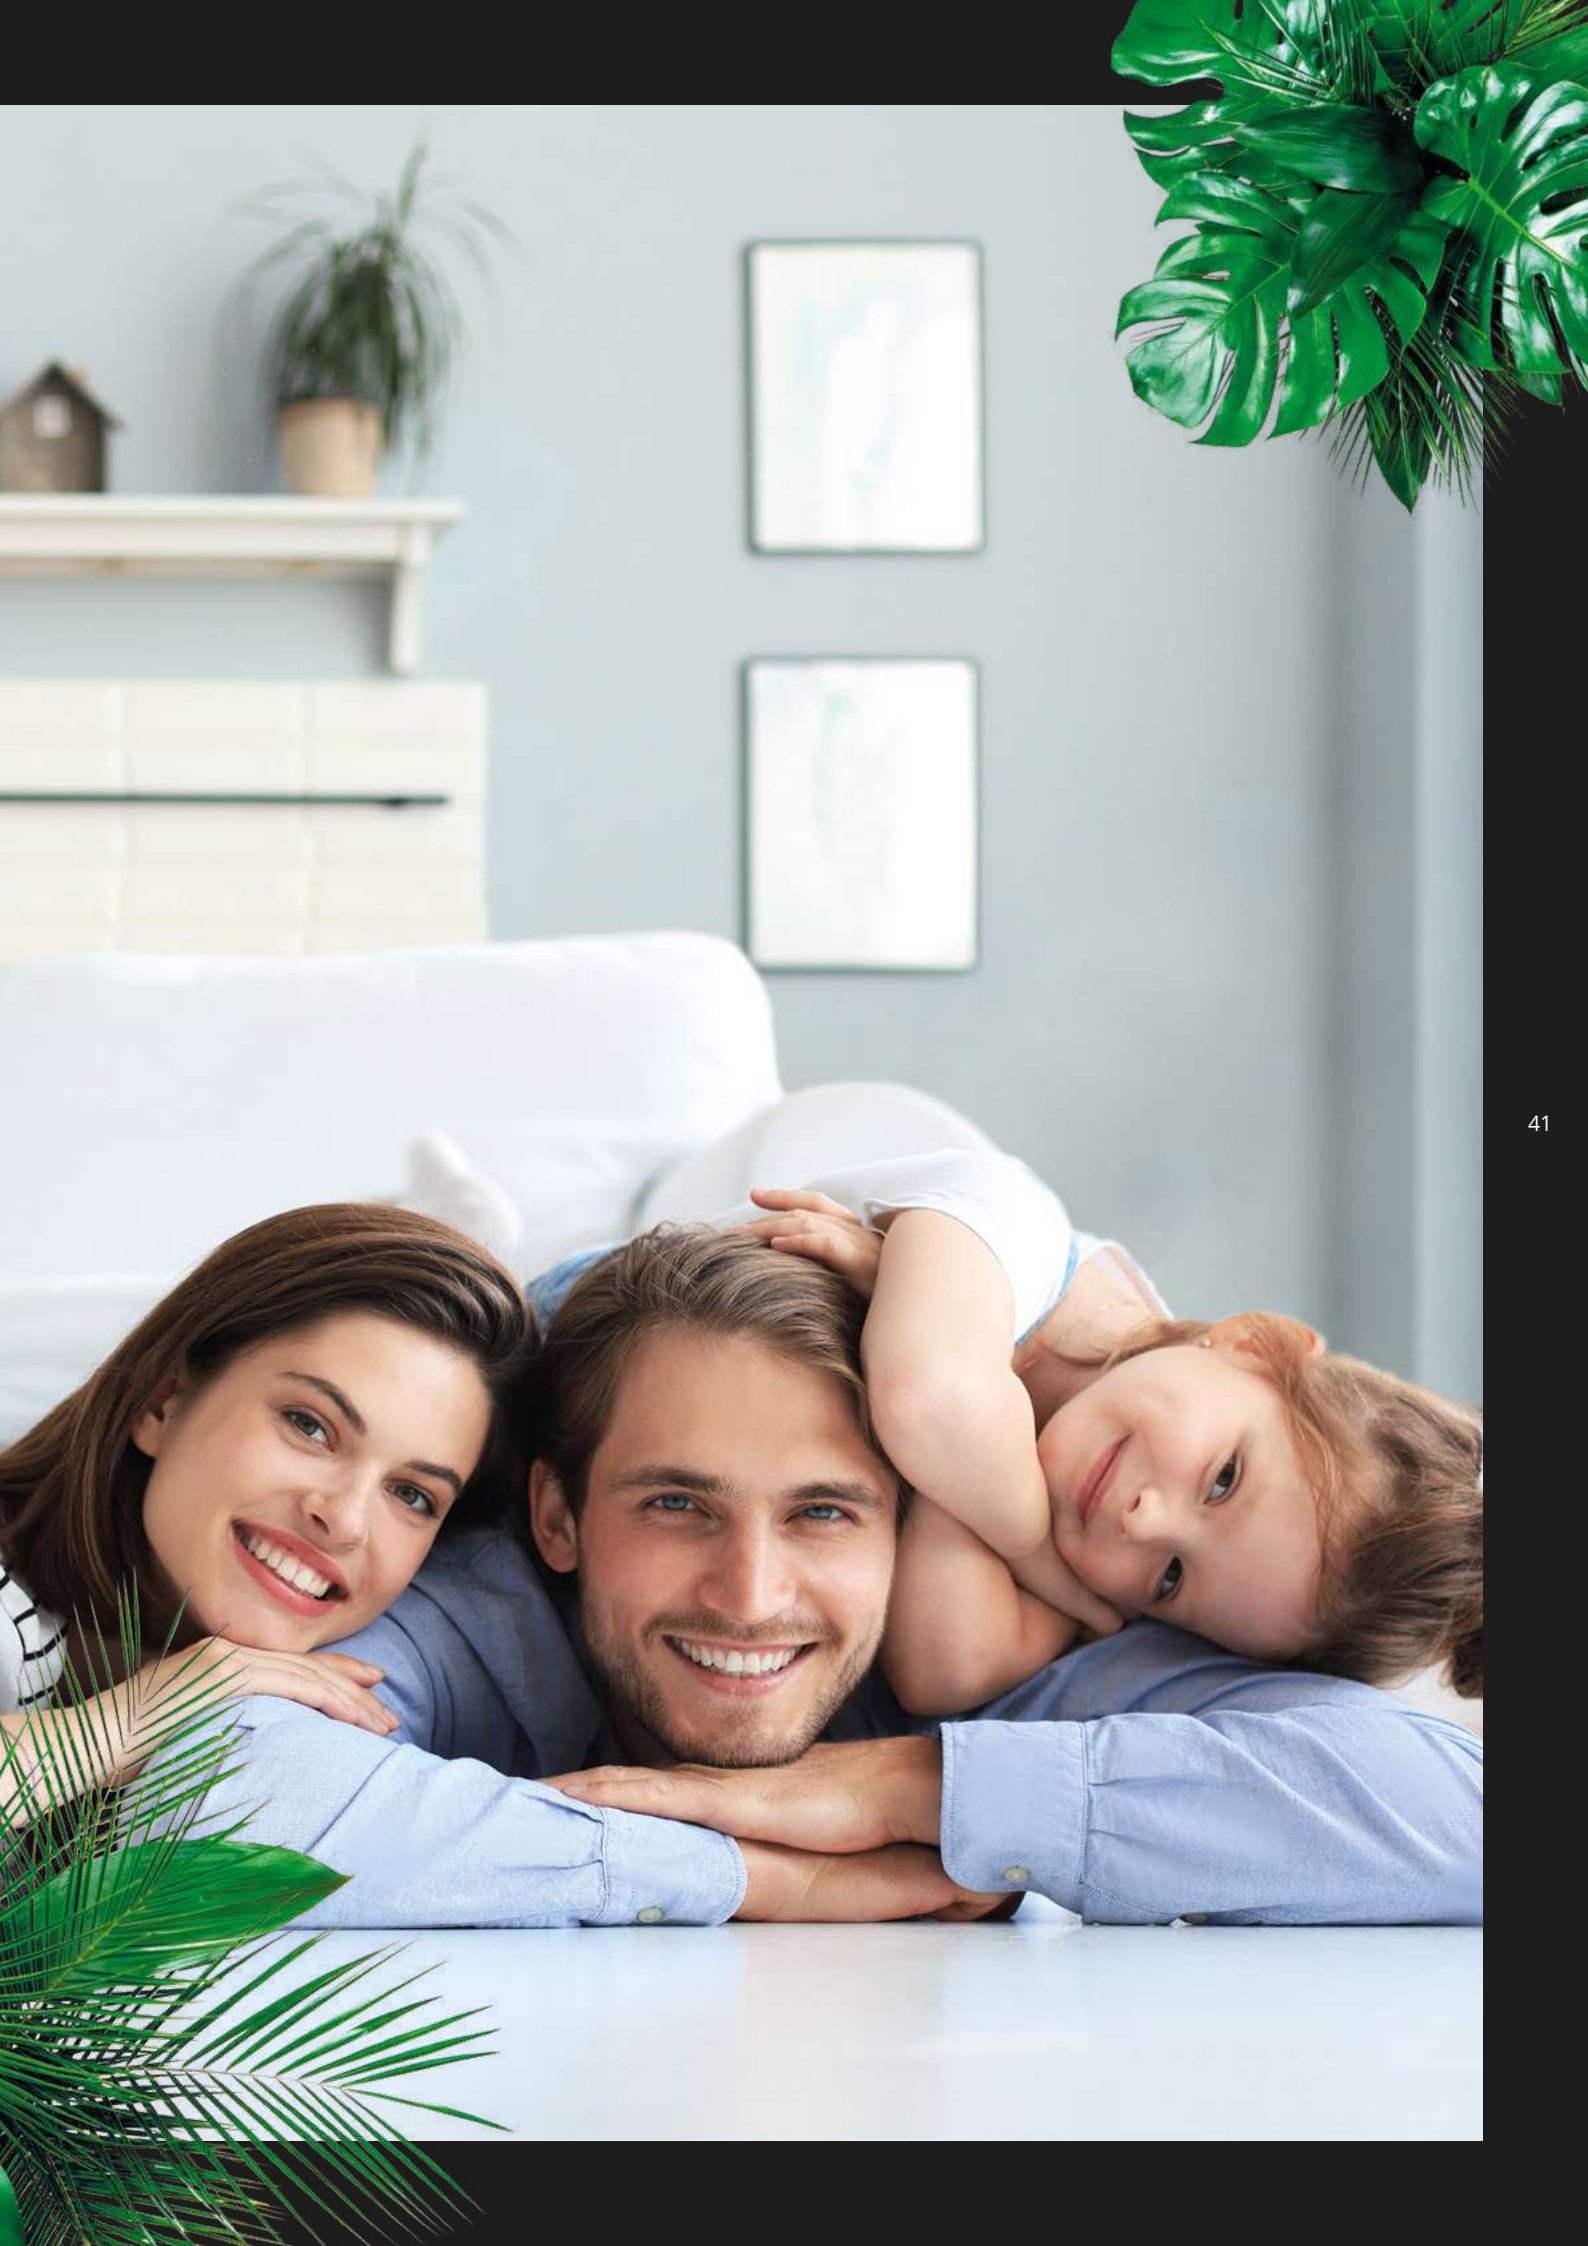

# Aquami Series useful features

---

Rotenso Aquami heat pumps are modern, high capacity, energy-efficient and, what is most important, maintenance-free heating systems. A number of useful features provides thermal comfort with no effort from the user.



## Combination of operating mode

To meet the user requirements 4 basic operation modes (cooling, heating, DHW, auto) and 3 combined operation modes are available.



## Heat pump power limitation

Users can choose from 8 configurations, depending on the maximum acceptable power.



## Disinfection

Heating water in the system to 70°C contributes to the effective elimination of Legionella bacteria.



# AQUAM

## SERIES

43



### Floor protection

Gradual removal of residue moisture from the concrete floor.



### Fast DHW heating mode

Forces the system into DHW mode for immediate hot water preparation.



### DHW circulation pump control

Keeps hot water circulating in the system according to a preset timer.

## Perfectly compact housing


Rotenso heat pump design is a response to the individual needs of investors, owners of large and small buildings, as well as changing standards in residential construction industry.

The smallest indoor unit on the market with a depth of just 270 mm.



### Depth reduced by 37%\*

\*as compared to competing units available on the market.

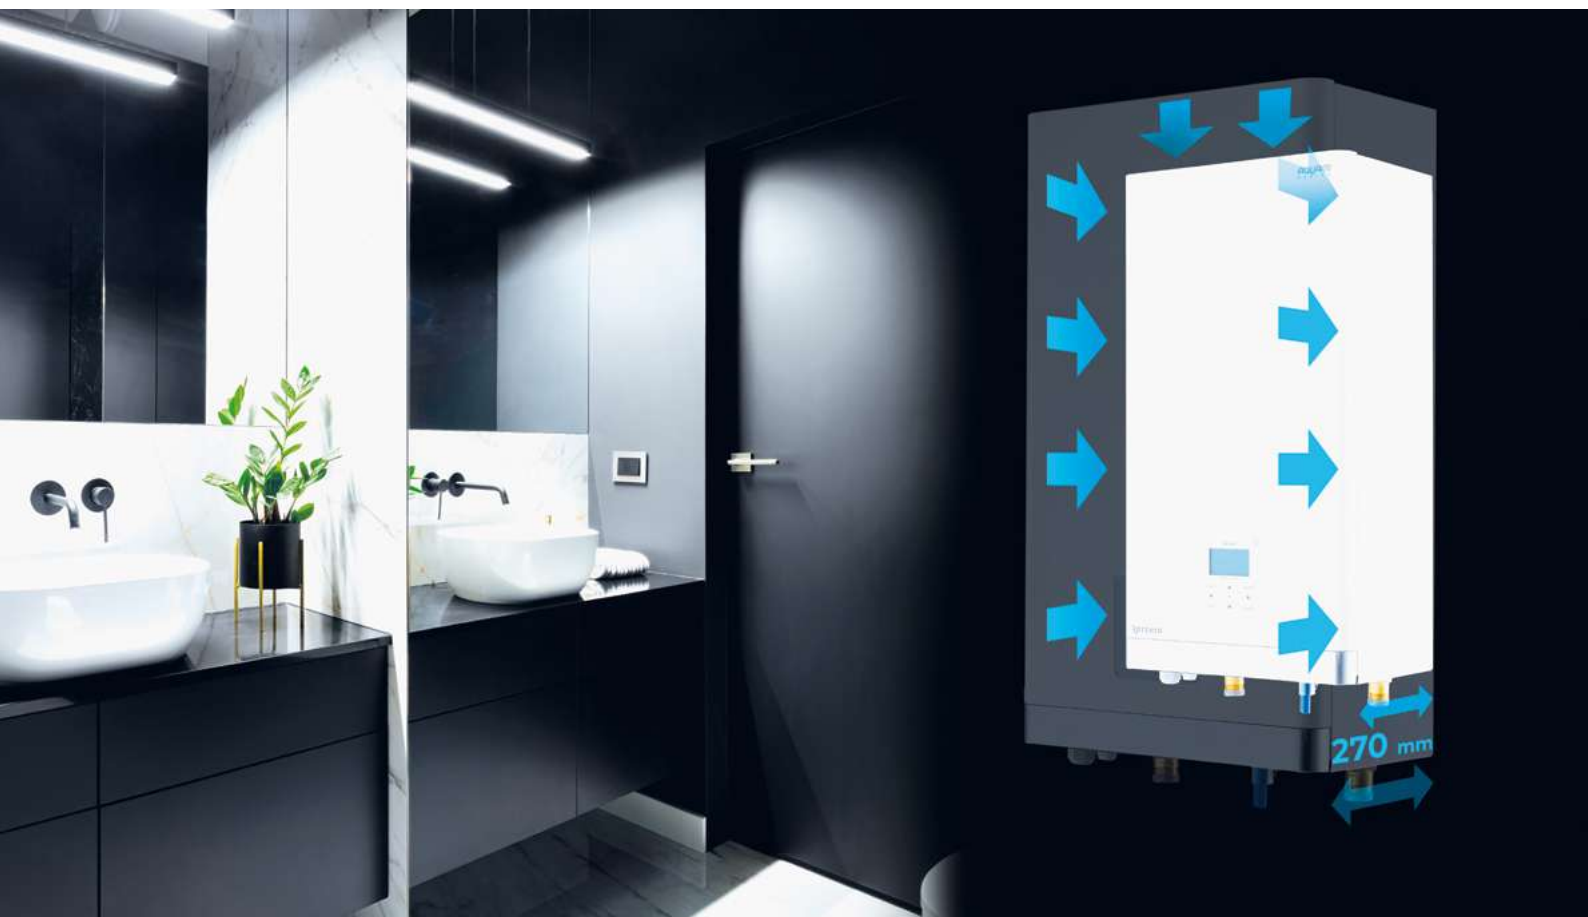

## Ergonomic products

---

The compact housing of the indoor unit allows for discreet installation and neat arrangement of the hydronic module in the living space.


This solution is preferred by owners of buildings with no boiler room or separate utility room.



## Floor drying

---

Gradual removal of residue moisture from the concrete floor. This feature, useful for newly constructed residential and commercial buildings, heats the floor using safe temperature, as specified by standards and manufacturers' guidelines, in order to prevent floor cracks and edge deflections.

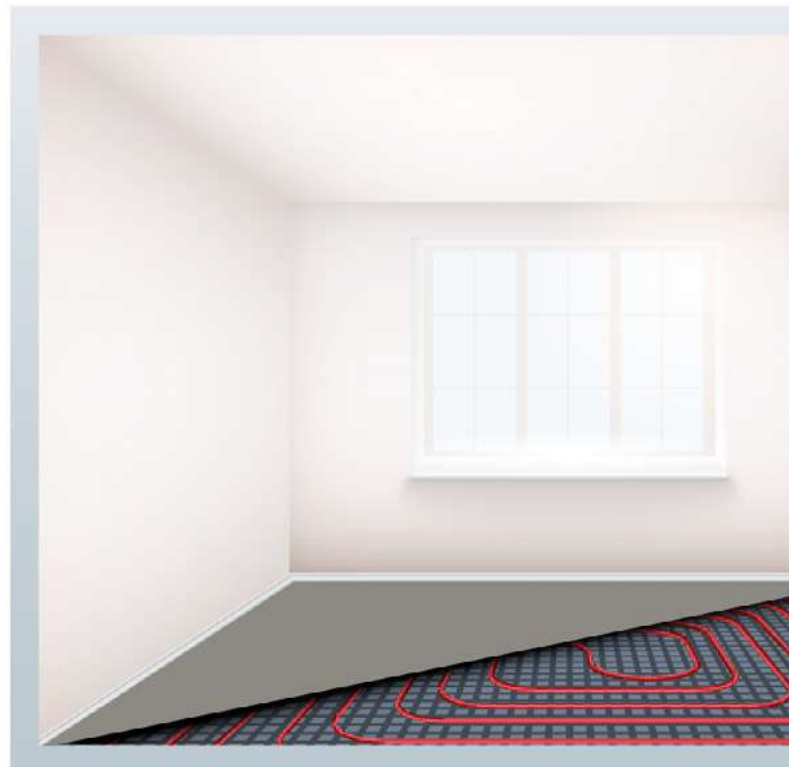

# You control It performs

---

With Rotenso Aquami you can control the system using both a wired controller and a mobile app, whether you are at home or away.



**RENI** heat pump controller  
in Split and Monoblock  
Rotenso Aquami systems

## Wired controller in a single unit mode

---

You can use the controller to:

- Check the heat pump operation status and operation mode
- Set temperature and operation mode
- Easily activate: Silent mode, Vacation mode, home Vacation mode, eco mode
- Set up schedule and timer
- Activate second temperature control zone
- Monitor system status
- Track energy consumption
- Discover energy-saving tips
- Control the device remotely
- Set the heating curve
- Display error codes
- Set language for messages
- Enable parental lock
- Check operating parameters
- Set audible alarm

The controller with an integrated temperature sensor can act as an indoor thermostat. If placed in a room, it can be connected in parallel to the second controller to manage device operation modes or set up the temperature of the heating water.



## Wired controller in MULTI mode

You can use the controller to:


- Set temperature and operation mode
- Easily activate: Vacation mode, eco mode
- Set up schedule and weekly timer
- Control the device remotely
- Display error codes
- Set language for messages
- Enable parental lock
- Check operating parameters
- Set audible alarm



**NOKA** heat pump controller  
in MULTI Rottenso Aquami system


# Unit dimensions

## AQUAMI SERIES

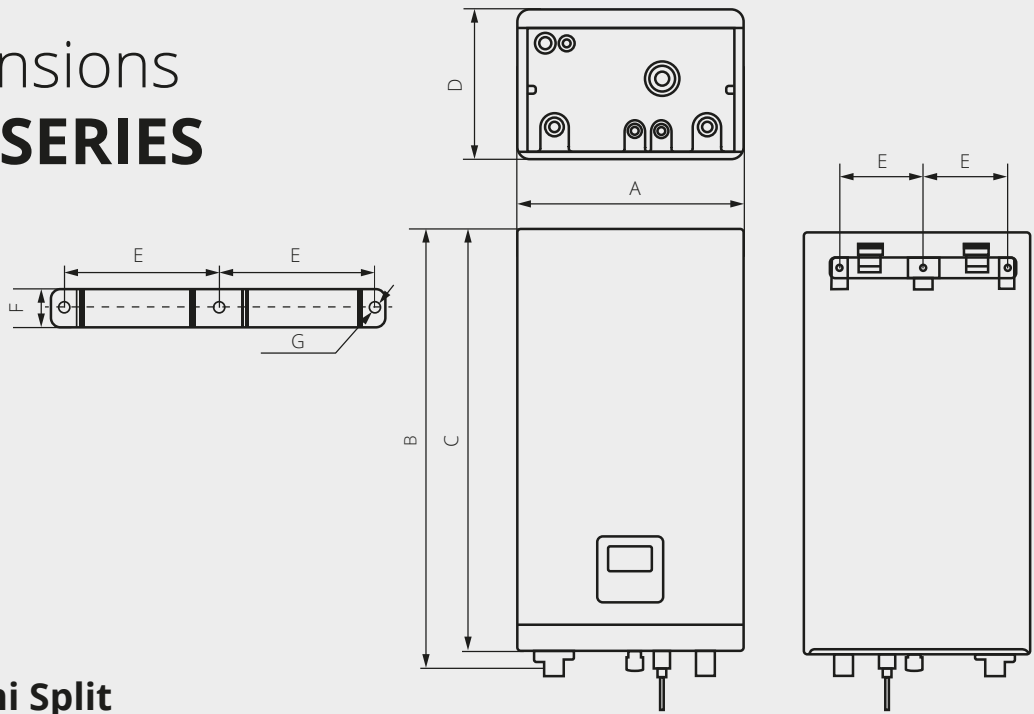


### Rotenso Aquami Split indoor unit 6/10/16 kW

| Model      | Power | Net dimensions (W×D×H) [mm] | A   | B   | C   | D   | E   | F  | G       | Net weight [kg] |
|------------|-------|-----------------------------|-----|-----|-----|-----|-----|----|---------|-----------------|
| AQS60X13i  | 6 kW  | 420 × 270 × 790             | 420 | 824 | 790 | 270 | 158 | 40 | 3 × Ø12 | 37              |
| AQS100X13i | 10 kW | 420 × 270 × 790             | 420 | 824 | 790 | 270 | 158 | 40 | 3 × Ø12 | 37              |
| AQS160X13i | 16 kW | 420 × 270 × 790             | 420 | 824 | 790 | 270 | 158 | 40 | 3 × Ø12 | 39              |

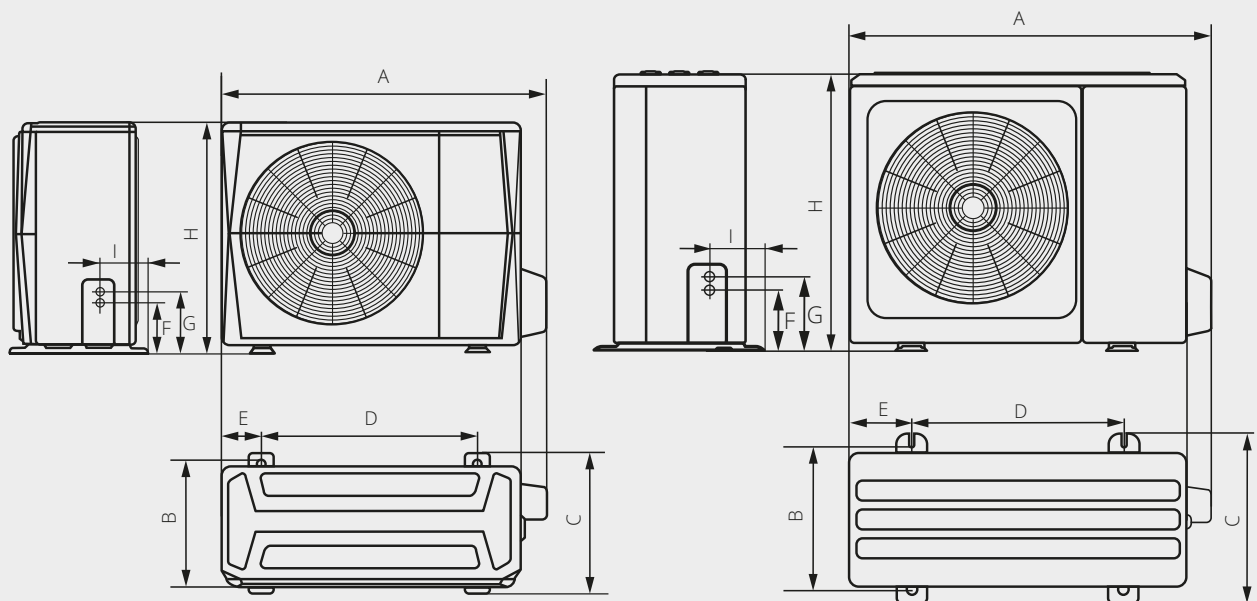


### Rotenso Aquami Split outdoor unit 4/6/8/10/12/14/16 kW

| Model     | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W×D) [mm] | A    | B   | C   | D   | E   | F   | G   | H   | I   | Net weight [kg] |
|-----------|-------|-----------------------------|----------------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----------------|
| AQS40X1o  | 4 kW  | 1008 × 426 × 712            | 663 × 375                  | 1008 | 375 | 426 | 663 | 134 | 110 | 170 | 712 | 160 | 58              |
| AQS60X1o  | 6 kW  | 1008 × 426 × 712            | 663 × 375                  | 1008 | 375 | 426 | 663 | 134 | 110 | 170 | 712 | 160 | 58              |
| AQS80X1o  | 8 kW  | 1118 × 523 × 865            | 656 × 456                  | 1118 | 456 | 523 | 656 | 191 | 110 | 170 | 865 | 230 | 75              |
| AQS100X1o | 10 kW | 1118 × 523 × 865            | 656 × 456                  | 1118 | 456 | 523 | 656 | 191 | 110 | 170 | 865 | 230 | 75              |
| AQS120X3o | 12 kW | 1118 × 523 × 865            | 656 × 456                  | 1118 | 456 | 523 | 656 | 191 | 110 | 170 | 865 | 230 | 112             |
| AQS140X3o | 14 kW | 1118 × 523 × 865            | 656 × 456                  | 1118 | 456 | 523 | 656 | 191 | 110 | 170 | 865 | 230 | 112             |
| AQS160X3o | 16 kW | 1118 × 523 × 865            | 656 × 456                  | 1118 | 456 | 523 | 656 | 191 | 110 | 170 | 865 | 230 | 112             |

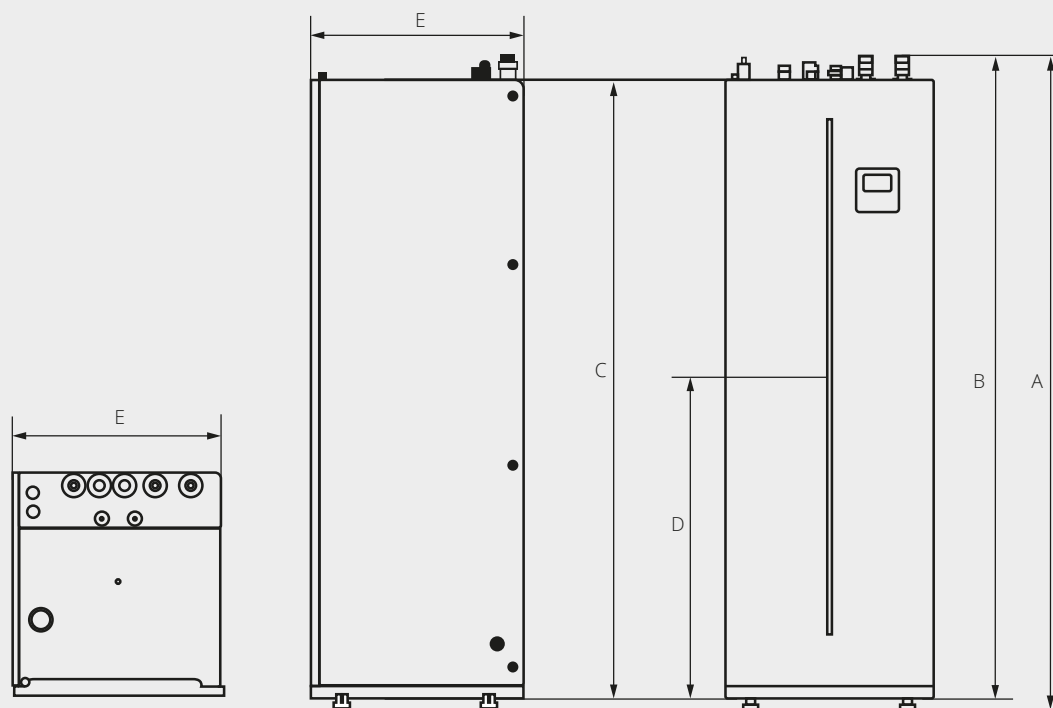

## Rotenso Aquami All in Split indoor unit 10/16 kW

| Model          | Power | Net dimensions (WxDxH) [mm] | A    | B    | C    | D    | E   | Net weight [kg] |
|----------------|-------|-----------------------------|------|------|------|------|-----|-----------------|
| AQS100T190X1i  | 10 kW | 600 × 600 × 1683            | 1775 | 1748 | 1682 | 915  | 600 | 139             |
| AQS100T240X13i | 10 kW | 600 × 600 × 1943            | 2034 | 2007 | 1942 | 1045 | 600 | 156             |
| AQS160T240X13i | 16 kW | 600 × 600 × 1943            | 2034 | 2007 | 1942 | 1045 | 600 | 158             |

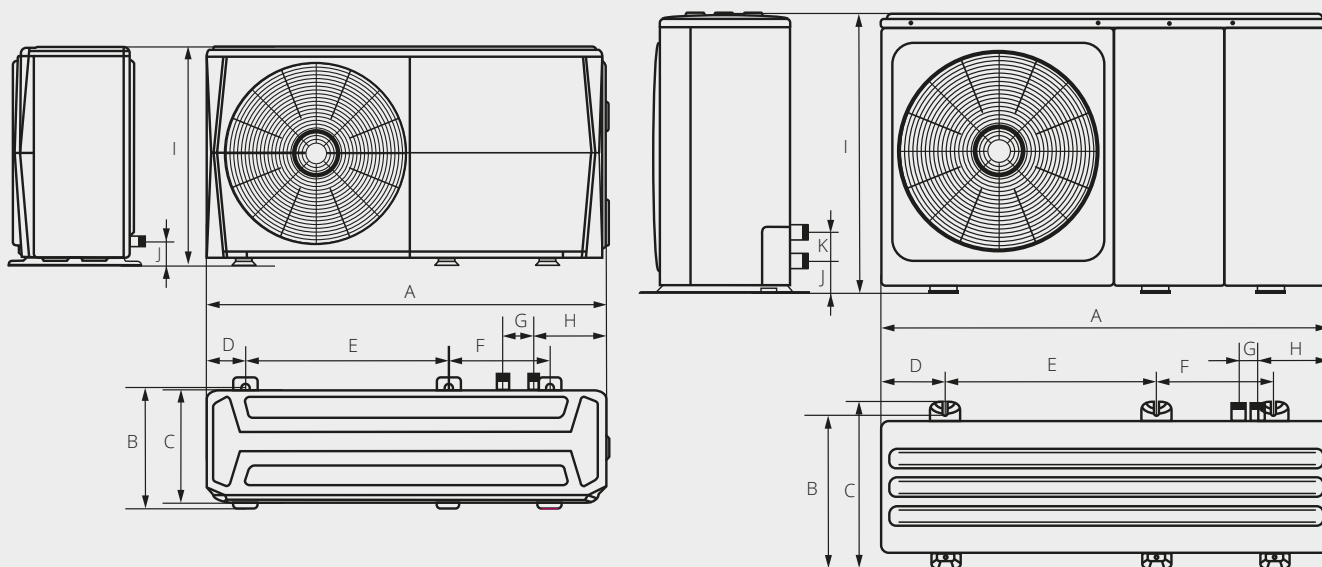


## Rotenso Aquami Monoblock outdoor unit 4/6/8/10/12/14/16 kW

| Model     | Power | Net dimensions (WxDxH) [mm] | Bracket spacing (S1xS2xG) [mm] | A    | B   | C   | D   | E   | F   | G   | H   | I   | J   | K  | Net weight [kg] |
|-----------|-------|-----------------------------|--------------------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----------------|
| AQM40X1o  | 4 kW  | 1295 × 429 × 718            | 656 × 363 × 488                | 1295 | 401 | 429 | 115 | 638 | 379 | 105 | 225 | 718 | 161 | -  | 91              |
| AQM60X1o  | 6 kW  | 1295 × 429 × 718            | 656 × 363 × 488                | 1295 | 401 | 429 | 115 | 638 | 379 | 105 | 225 | 718 | 161 | -  | 91              |
| AQM80X1o  | 8 kW  | 1385 × 526 × 865            | 656 × 363 × 488                | 1385 | 488 | 526 | 192 | 656 | 363 | 60  | 221 | 865 | 182 | 81 | 110             |
| AQM100X1o | 10 kW | 1385 × 526 × 865            | 656 × 363 × 488                | 1385 | 488 | 526 | 192 | 656 | 363 | 60  | 221 | 865 | 182 | 81 | 110             |
| AQM120X3o | 12 kW | 1385 × 526 × 865            | 656 × 363 × 488                | 1385 | 488 | 526 | 192 | 656 | 363 | 60  | 221 | 865 | 182 | 81 | 149             |
| AQM140X3o | 14 kW | 1385 × 526 × 865            | 656 × 363 × 488                | 1385 | 488 | 526 | 192 | 656 | 363 | 60  | 221 | 865 | 182 | 81 | 149             |
| AQM160X3o | 16 kW | 1385 × 526 × 865            | 656 × 363 × 488                | 1385 | 488 | 526 | 192 | 656 | 363 | 60  | 221 | 865 | 182 | 81 | 149             |

# Unit dimensions


## AQUAMI SERIES

50

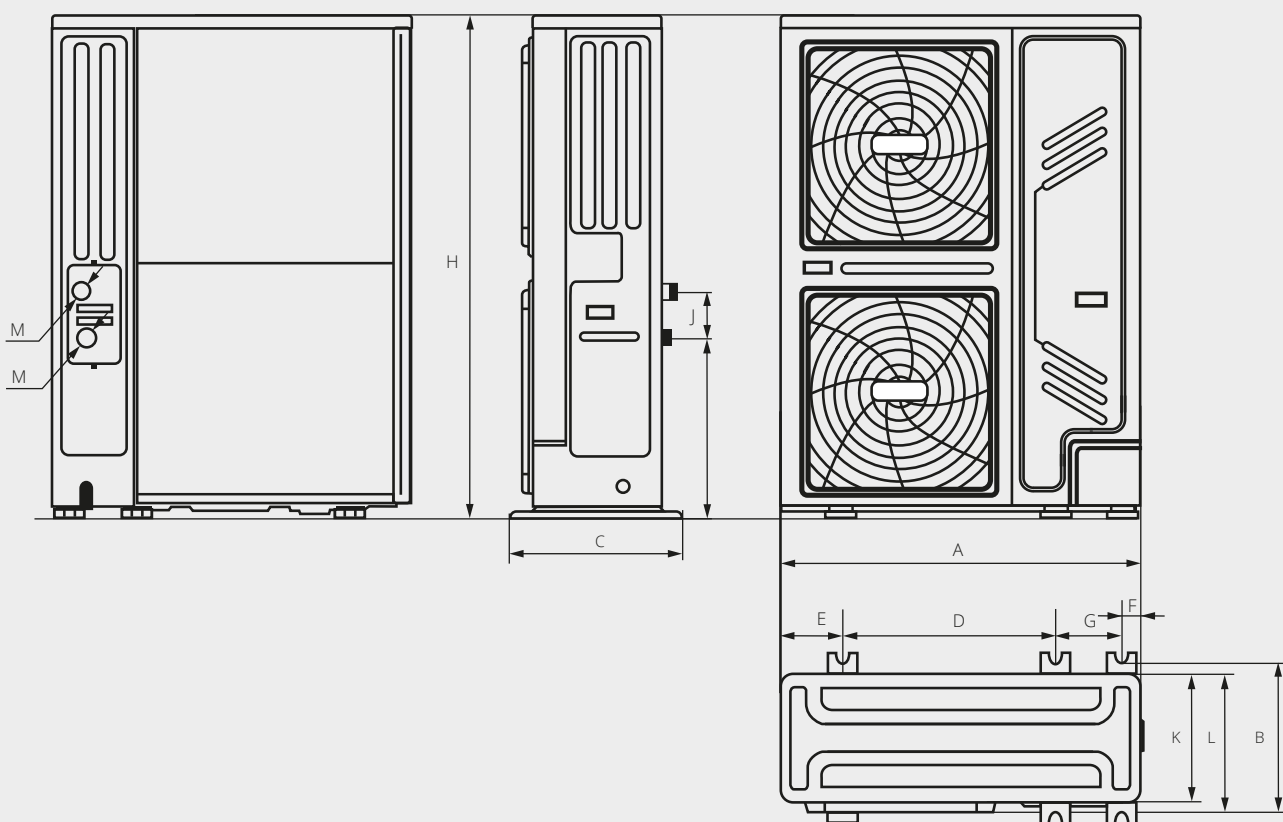


### Rotenso Aquami Big Mono outdoor unit 22/30 kW

| Model    | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W1×W2×D) [mm] | A    | B   | C   | D   | E   | F  | G   | H    | I   | J   | K   | L   | M        | Net weight [kg] |
|----------|-------|-----------------------------|--------------------------------|------|-----|-----|-----|-----|----|-----|------|-----|-----|-----|-----|----------|-----------------|
| AQM220X3 | 22 kW | 1129 × 528 × 1558           | 668 × 206 × 494                | 1129 | 494 | 528 | 668 | 192 | 98 | 206 | 1558 | 558 | 143 | 400 | 440 | Ø 1-1.4" | 177             |
| AQM300X3 | 30 kW | 1129 × 528 × 1558           | 668 × 206 × 494                | 1129 | 494 | 528 | 668 | 192 | 98 | 206 | 1558 | 558 | 143 | 400 | 440 | Ø 1-1.4" | 177             |

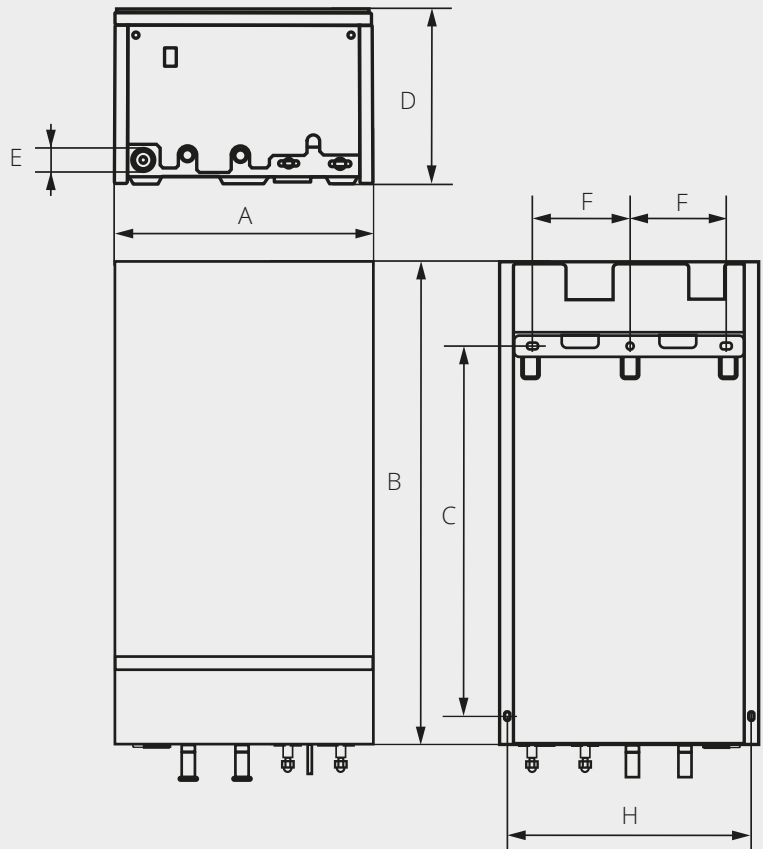

## Rotenso Aquami Multi Split indoor unit 8 kW

| Model     | Net dimensions (W×D×H) [mm] | Gross dimensions (W×D×H) [mm] | A   | B   | C     | D   | E  | F     | H     | Net weight [kg] |
|-----------|-----------------------------|-------------------------------|-----|-----|-------|-----|----|-------|-------|-----------------|
| AQMS80X1i | 490 × 918 × 325             | 570 × 1055 × 415              | 490 | 918 | 702,5 | 325 | 44 | 183,7 | 462,2 | 56/64           |

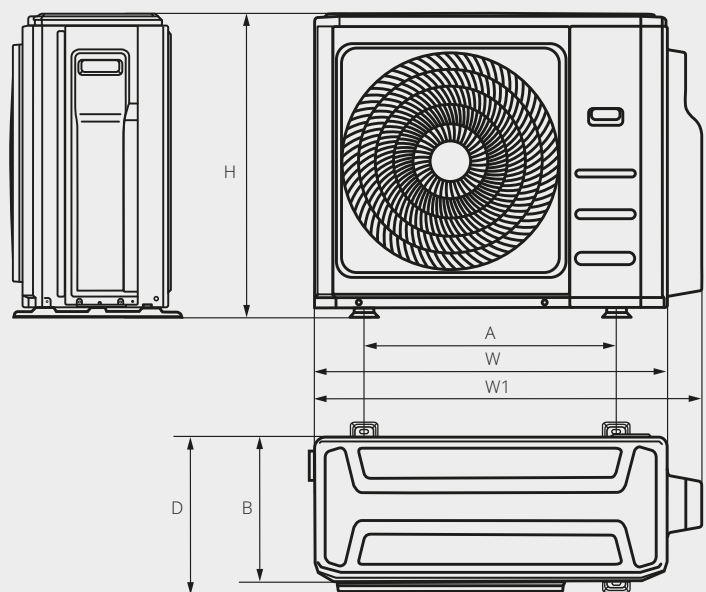

## Rotenso Aquami Multi Split outdoor unit 10 kW

| Model   | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W×D) [mm] | W   | W1   | A   | B   | D   | H   | Net weight [kg] |
|---------|-------|-----------------------------|----------------------------|-----|------|-----|-----|-----|-----|-----------------|
| H100Xm4 | 10 kW | 946 × 410 × 810             | 673 × 403                  | 946 | 1034 | 673 | 403 | 410 | 810 | 68,8            |

# Solutions

## AQUAMI SERIES

---



### SPLIT

**Rotenso Aquami Split** consists of an outdoor unit (condenser) and a hydronic module for indoor installation.

### ALL IN SPLIT

**Rotenso Aquami All in Split** consists of an outdoor unit (condenser) and a hydronic module integrated with domestic hot water tank made of stainless steel for indoor installation.



### MONO

**Rotenso Aquami Monoblock** is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing designed for outdoor installation.



### BIG MONO


**Rotenso Aquami Big Mono** is a heat pump with large capacity (22 kW and 30 kW) in which the refrigeration module and the hydronic module are contained in a single, compact unit housing designed for outdoor installation.



## MULTI SPLIT Multiple features combined in a single system

Aquami Multi Split is a combination of air-to-water and air-to-air heat pump systems for residential and commercial applications with the capacity of 10 kW (air-to-air) and 8 kW (air-to-water).

4 indoor units can be connected to the system. In addition to the Multi Aquami unit operating in the air-to-water mode, you can connect up to 3 Multi Series air-conditioners operating in the air-to-air mode. Aquami heat pumps can be used in both new and retrofit buildings.

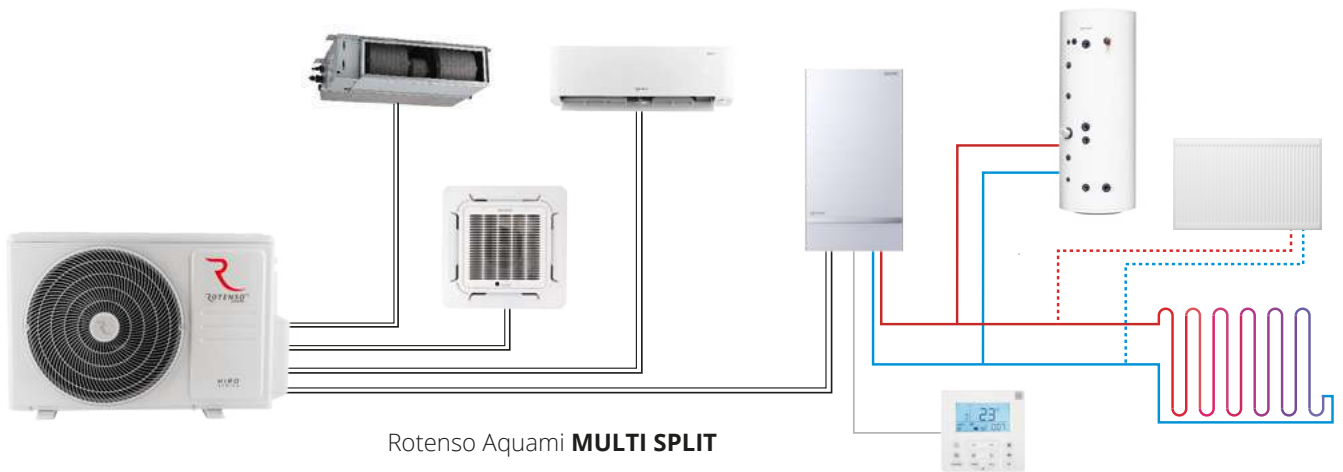

# AQUAMI S E R I E S



# Solution

## AQUAMI SPLIT

---



Rotenso Aquami Split heat pump consists of an outdoor unit (condenser) and a hydronic module (for indoor installation). Such solution allows easy access to the hydronic module. Connection of outdoor and indoor units' refrigeration circuits is resistant to freezing, even during prolonged power outages.

Modern design and high efficiency at low temperatures make Rotenso Aquami heat pumps a perfect choice for heating homes, stores, commercial premises and offices.

### Standard equipment:

1. Indoor unit
2. Outdoor unit
3. Wired controller
4. DHW tank sensor
5. Plate PHE / plate heat exchanger
6. Flow meter
7. Diaphragm vessel
8. Pressure gauge
9. Circulation pump
10. Pressure relief valve
11. Purge valve
12. Y water filter

54





Indoor unit  
Hydrobox

AQS60X13i, AQS100X13i,  
AQS160X13i



4-6 kW



8-16 kW

| Model          | Rotenso Aquami Split |   |   |    |    |    |    |
|----------------|----------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                    | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f | •                    | • | • | •  |    |    |    |
| 380-420~50, 3f |                      |   |   |    | •  | •  | •  |

# Solutions

## AQUAMI ALL IN SPLIT



Similar to split-Type heat pump, Rotenso All in Split solution consists of an outdoor unit and an indoor unit (hydronic module). The difference is that in the All in Split heat pump the hydronic module has been integrated with the domestic hot water (DHW) tank. As a whole, the hydrobox and DHW tank are enclosed in a single housing to form a compact indoor unit which can be integrated in the hallway furniture, placed in a laundry room or in the kitchen along with other household appliances. Connection of outdoor and indoor units' refrigeration circuits is resistant to freezing, even during prolonged power outages.

The quality of components and solutions, e.g. corrosion-resistant stainless steel DHW tank, ensures many years of trouble-free operation.

### Standard equipment:


1. Indoor unit
2. Outdoor unit
3. Wired controller
4. DHW tank sensor
5. Plate PHE / plate heat exchanger
6. Flow meter
7. Diaphragm vessel
8. Pressure gauge
9. Circulation pump
10. Pressure relief valve
11. Purge valve
12. Y water filter
13. 3-way switching valve with actuator






Indoor unit Hydrobox

AQS100T190X1i, AQS100T240X13i,  
AQS160T240X13i



4-6 kW

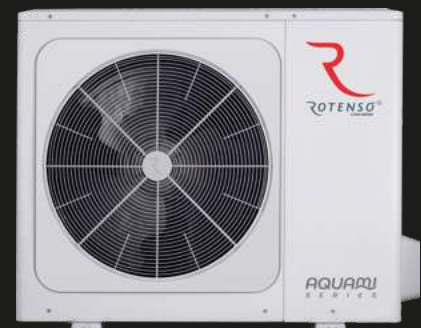

8-16 kW

| Model          | Rotenso Aquami All in Split |   |   |    |    |    |    |
|----------------|-----------------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                           | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240-50, 1f | •                           | • | • | •  |    |    |    |
| 380-420-50, 3f |                             |   |   |    | •  | •  | •  |

# Solution

## AQUAMI MONOBLOCK

---




Rotenso Aquami Monoblock is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing. This Type of solution makes heat pump installation faster and easier, and requires no additional space for the hydronic module inside the building.

Double door heat pump housing provides easy access to all its components. Heat pump operating parameters can be quickly modified and monitored in real time from the user interface. Modern design of Rotenso Aquami Monoblock heat pump and its high efficiency even at extremely low temperatures makes it a perfect choice for heating homes, stores, commercial premises and offices.

### Standard equipment:

1. Outdoor unit
2. Wired controller
3. DHW tank sensor
- 58 4. Plate PHE / plate heat exchanger
5. Flow meter
6. Diaphragm vessel
7. Circulation pump
8. Pressure relief valve
9. Purge valve
10. Y water filter



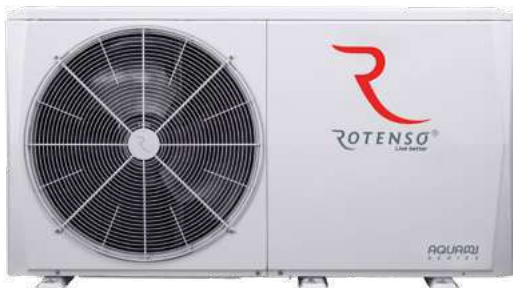

4-6 kW



8-16 kW

| Model          | Rotenso Aquami Monoblock |   |   |    |    |    |    |
|----------------|--------------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                        | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f | •                        | • | • | •  |    |    |    |
| 380-420~50, 3f |                          |   |   |    | •  | •  | •  |

# Solution

## AQUAMI BIG MONO



Rotenso Aquami Big Mono is characterized by larger heating capacity (up to 30 kW) designed for buildings with higher heating power demand. In this double-fan Rotenso Aquami Big Mono pump, the refrigerating and hydronic modules are enclosed in a single, compact unit housing.

This eliminates cascade connection of several units with lower capacities. Another benefit is quick and easy installation. The Rotenso Aquami Big Mono heat pump also requires no additional space for the hydronic module inside the building. Heat pump housing is designed to provide an easy access to all its components, while operating parameters can be quickly modified and monitored in real time from the user interface.

Modern double-fan design of the Rotenso heat pump and its high efficiency even at low temperatures make it a perfect choice for heating homes, stores, commercial premises, offices and other facilities with high heating power demand.

### Standard equipment:

1. Outdoor unit
2. Wired controller
3. DHW tank sensor
4. Plate PHE / plate heat exchanger
5. Flow meter
6. Diaphragm vessel
7. Circulation pump
8. Pressure relief valve
9. Purge valve
10. Y water filter





22-30 kW

| Model          | Rotenso Aquami Big Mono |    |
|----------------|-------------------------|----|
| Capacity (kW)  | 22                      | 30 |
| 220-240~50, 1f |                         |    |
| 380-420~50, 3f | •                       | •  |

# Solution


## AQUAMI MULTI SPLIT



Multi Split Aquami is a combination of air-to-water and air-to-air heat pump systems with a capacity of 8 kW for residential and commercial applications. 4 indoor units can be connected to the system. In addition to the Multi Split Aquami hydronic module operating in the air-to-water mode, you can connect up to 3 Multi Split Series air-conditioners operating in the air-to-air mode.

By combining the Hiro H100Xm4 Multi Split outdoor unit and the Aquami heat pump indoor unit in a hybrid system, you can:

- Heat or cool spaces using air systems (air conditioners)
- Heat spaces using water systems (underfloor heating, radiators, fan coils)
- Heat domestic hot water.

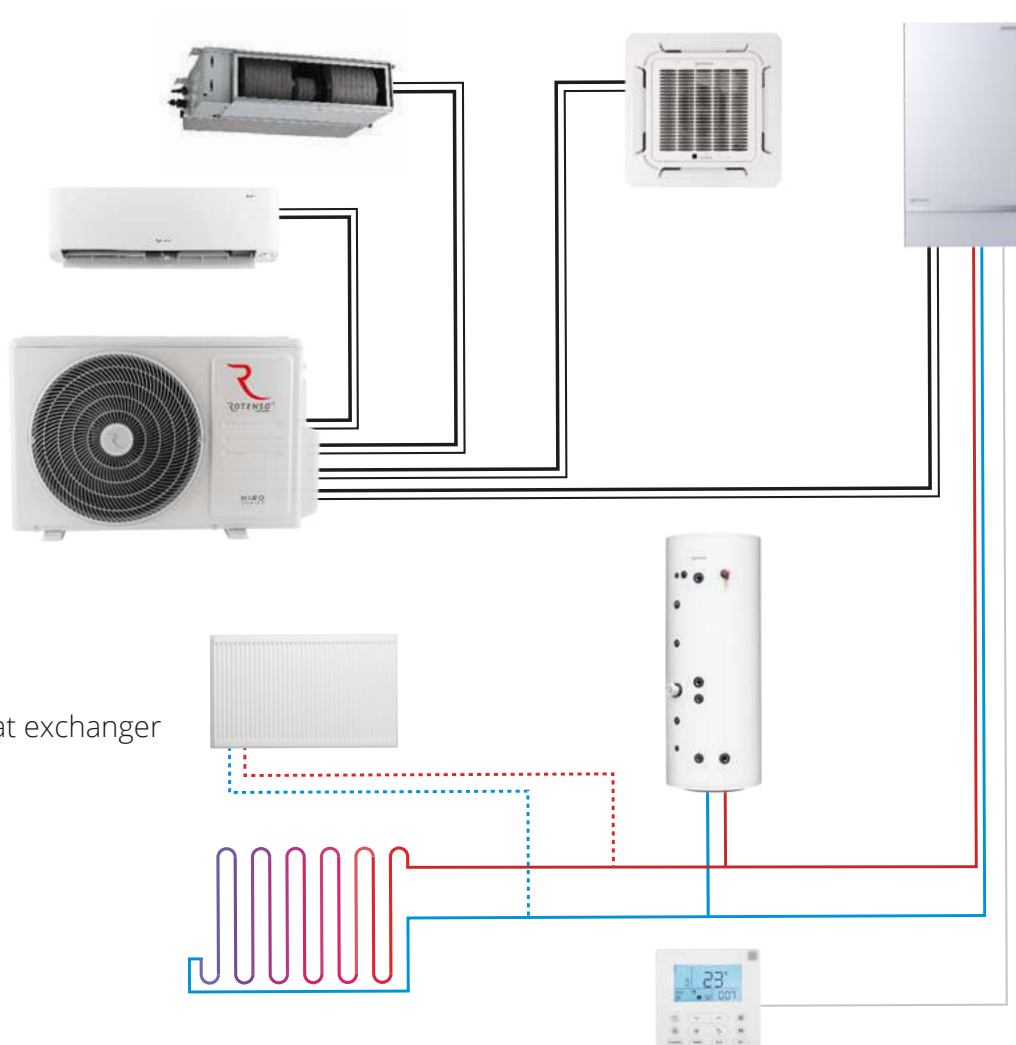

### Standard equipment:

1. Indoor unit
2. Outdoor unit
3. Wired controller
4. Plate PHE / plate heat exchanger
5. Flow meter
6. Diaphragm vessel
7. Pressure gauge
8. Circulation pump
9. Pressure relief valve
10. Purge valve
11. Y water filter



Indoor unit  
Hydrobox  
AQMS80X1i



8 kW

| Model          | Rotenso Aquami Multi Split (R32) |   |   |    |    |    |    |
|----------------|----------------------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                                | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f |                                  |   | • |    |    |    |    |
| 380-420~50, 3f |                                  |   |   |    |    |    |    |



## Aquami Series Split

---

**Rotenso Aquami Split heat pump consists of an outdoor unit and a hydronic module, so called hydrobox, for indoor installation. Rotenso Aquami Split heat pump features the highest energy efficiency class A+++. The excellent capacity of the Aquami Split series contributes to low electricity consumption.**

Due to its freeze-resistance and capacity at extremely low outdoor temperatures down to  $-25^{\circ}\text{C}$ , the amount of heating energy produced by the heat pump can be five times the amount of the consumed electric energy.

The series has the advantage of easy access to the hydronic module and its connection between the refrigeration circuits of outdoor and indoor units is resistant to freezing even during prolonged power outages.

Rotenso Aquami heat pump can heat water up to  $65^{\circ}\text{C}$  which allows it to supply central heating systems with traditional radiators. Heat pump's single-fan design, bionic fan blade pattern as well as twin rotary DC compressor ensure the Rotenso Aquami's high efficiency with minimal noise – only 35 dB (A) (in Silent mode).

The heat pump can be controlled by a wired controller or a iLetComfort mobile app to make its daily use even more convenient.



# AQUAMI SPLIT



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Smart Grid  
functionality



Controller  
equipped with  
a temperature  
sensor



Integrated Wi-Fi  
module



Control via  
mobile app





## Controller equipped with a temperature sensor

If the sensor detects a difference between the set temperature and the actual temperature in the room, the heat pump will operate to reach the desired temperature inside the building.

66



### Supply water temperature of 65°C

If the heat pump is used to heat spaces where radiators are installed, temperature of the supply water in the system must be higher. Rotenso Aquami heat pumps can heat water up to 65°C.



### Integrated Wi-Fi module

The Rotenso Aquami Split heat pump can be controlled both by the wired controller and the iLetComfort mobile app, whether you are staying at home or not.



## Smart Grid functionality

---

The heat pump controller is designed to work with the „Smart Grid“. With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.

67



### Operating range down to $-25^{\circ}\text{C}$

Heat pumps are prepared for efficient operation even at extreme outdoor temperatures as low as  $-25^{\circ}\text{C}$ . During the cold winter, they guarantee that supply water for central heating and domestic hot water are heated sufficiently.




### Control via mobile app

You can use your tablet or smartphone to control the Rotenso Aquami Split unit no matter where you are.

# Aquami Split

4-16 kW

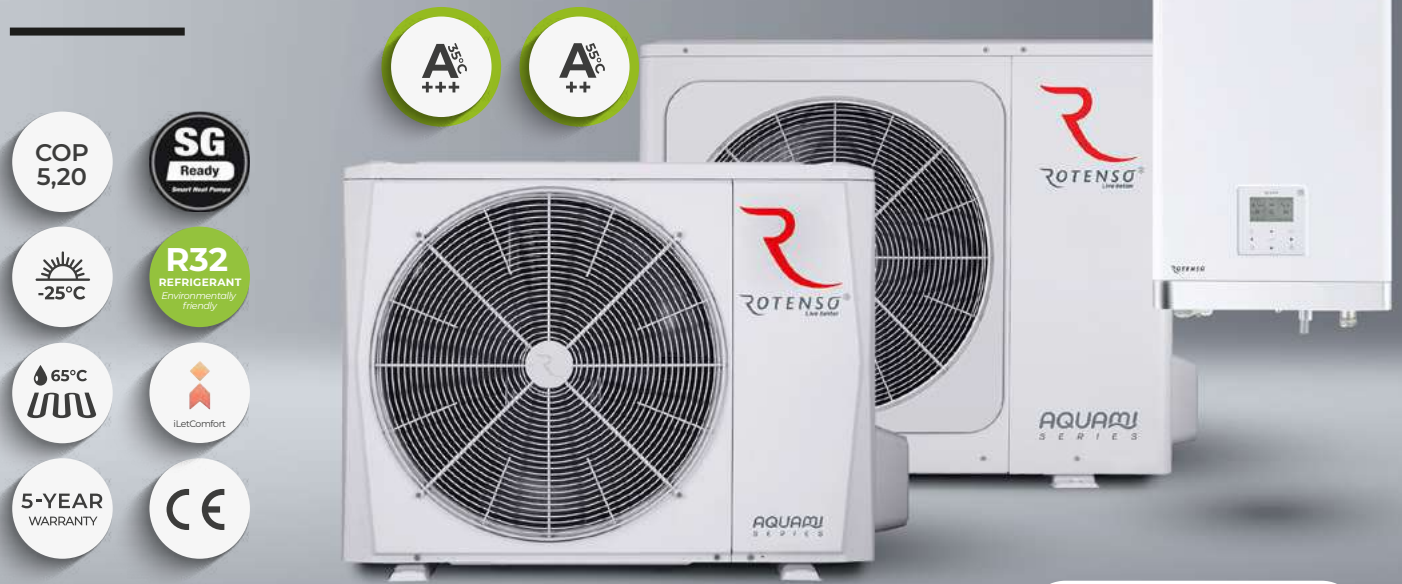

- COP 5,20
- SG Ready
- R32 REFRIGERANT Environmentally Friendly
- 25°C
- 65°C
- iLetComfort
- 5-YEAR WARRANTY
- CE



## Device features

68

- Environmentally friendly refrigerant R32
- Efficient heating
- Energy efficiency class at 35°C A+++
- Energy efficiency class at 55°C A++
- Maximum COP 5,20<sup>(1)</sup>
- Operating range down to -25°C
- Supply water temperature of 65°C
- Integrated USB port for updates
- Energy meter
- Smart Grid functionality
- Twin rotary compressor
- Integrated electric heater
- Outdoor unit drip tray heater
- Compressor crankcase heater
- Indoor unit drip tray
- Easy installation and maintenance
- Compact indoor split unit housing
- Maximum installation length up to 30m
- Silent mode
- Built-in Wi-Fi module
- Daily operation schedule
- Configurable weekly schedules
- Vacation mode
- Menu in English
- Multilanguage menu
- Integrated temperature sensor
- Weather operating modes (climate curve)
- 2 heating control zones
- Dedicated application
- Disinfection
- DHW circulation pump operation schedules
- Maximum leaving water temperature of 60°C (in DHW mode)
- Prepared to create a cascade system
- Modbus Protocol

1. Refers to units AQS40X1o and AQS80X1o

# Technical specification

| Indoor unit model                           |                                  |                                     | AQS60X13i                       | AQS100X13i                      | AQS160X13i                      |
|---|----------------------------------|-------------------------------------|---------------------------------|---------------------------------|---------------------------------|
| EAN product code                            |                                  |                                     | 5905567602115                   | 5905567602122                   | 5905567602139                   |
| Compatible outdoor unit model               |                                  |                                     | AQS40/60X1o                     | AQS80/100X1o                    | AQS120/140/160X3o               |
| Operation modes                             |                                  |                                     | Heating and cooling             |                                 | Heating and cooling             |
| Leaving water temperature                   | Space cooling                    | °C                                  | 5-25                            | 5-25                            | 5-25                            |
|   | Space heating                    | °C                                  | 25-65                           | 25-65                           | 25-65                           |
|   | DHW (tank)                       |                                     | 30-60                           | 30-60                           | 30-60                           |
| Power supply                                |                                  | V-Hz, Ø                             | 220-240-50, 1f / 380-420-50, 3f | 220-240-50, 1f / 380-420-50, 3f | 220-240-50, 1f / 380-420-50, 3f |
| Rated input / Operating current             |                                  | W / A                               | 9095 / 13.5                     | 9095 / 13.5                     | 9095 / 13.5                     |
| Sound power level                           |                                  | dB(A)                               | 38                              | 42                              | 43                              |
| Electric heater                             | Power supply                     | V-Hz, Ø                             | 220-240-50, 1f / 380-420-50, 3f | 220-240-50, 1f / 380-420-50, 3f | 220-240-50, 1f / 380-420-50, 3f |
|   | Number of heating stages / Power | pcs. / kW                           | 3 / 9                           | 3 / 9 (3 + 3 + 3)               | 3 / 9 (3 + 3 + 3)               |
|   | Maximum running current          | A                                   | 13.3                            | 13.3                            | 13.3                            |
| Net dimensions                              |                                  | W × D × H                           | mm                              | 420 × 270 × 790                 | 420 × 270 × 790                 |
| Gross dimensions                            |                                  |                                     | mm                              | 525 × 360 × 1050                | 525 × 360 × 1050                |
| Net weight / Gross weight                   |                                  |                                     | kg                              | 37/43                           | 39/45                           |
| Water circuit                               | Water connections                |                                     | mm (inch)                       | R1" external                    | R1" external                    |
|   | Pressure relief valve            |                                     | MPa                             | 0.3                             | 0.3                             |
|   | Condensate drain                 |                                     |                                 | Ø25                             | Ø25                             |
|   | Expansion tank                   | Total volume / Actual volume        | l                               | 8 / 4,8                         | 8 / 4,8                         |
|   |                                  | Maximum pressure / Initial pressure | MPa                             | 0,3 / 0,1                       | 0,3 / 0,1                       |
|   | PHE / plate heat exchanger       | Type                                |                                 | PHE / plate heat exchanger      | PHE / plate heat exchanger      |
|   |                                  | Minimum flow                        | l/min                           | 6                               | 10                              |
|   | Water pump head                  |                                     | m                               | 9                               | 9                               |
| Water pump type                             |                                  |                                     | DC                              | DC                              |                                 |
| Refrigerant circuit                         |                                  | Liquid / Gas                        | mm                              | Ø6,35 (1/4") / Ø15,9 (5/8")     | Ø9,52 (3/8") / Ø15,9 (5/8")     |
| Minimal wire pcs and dimension of cords*    |                                  | pcs × mm <sup>2</sup>               |                                 | 5 × 2,5                         | 5 × 2,5                         |
| Control cables: indoor unit to outdoor unit |                                  | pcs × mm <sup>2</sup>               |                                 | 2 × 0,75 (shielded cable)       | 2 × 0,75 (shielded cable)       |

| Outdoor unit model   |   |     | AQS40X1o       | AQS60X1o       | AQS80X1o       | AQS100X1o      | AQS120X3o      | AQS140X3o      | AQS160X3o      |
|--|---|-----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| EAN product code   |   |     | 5905567601071  | 5905567602054  | 5905567602061  | 5905567602078  | 5905567602085  | 5905567602092  | 5905567602108  |
| Compatible indoor unit model   |   |     | AQS40X13i      | AQS60X13i      | AQS100X13i     | AQS100X13i     | AQS160X13i     | AQS160X13i     | AQS160X13i     |
| Power supply   |   |     | 220-240-50, 1f | 220-240-50, 1f | 220-240-50, 1f | 220-240-50, 1f | 380-420-50, 3f | 380-420-50, 3f | 380-420-50, 3f |
| Heating (A7/W35)   | Capacity  | kW  | 4,25           | 6,20           | 8,30           | 10,00          | 12,10          | 14,50          | 16,00          |
|  | Rated input   | kW  | 0,82           | 1,24           | 1,60           | 2,00           | 2,44           | 3,09           | 3,56           |
|  | COP   |     | 5,20           | 5,00           | 5,20           | 5,00           | 4,95           | 4,70           | 4,50           |
| Heating (A7/W45)   | Capacity  | kW  | 4,35           | 6,35           | 8,20           | 10,00          | 12,30          | 14,20          | 16,00          |
|  | Rated input   | kW  | 1,14           | 1,69           | 2,08           | 2,63           | 3,24           | 3,89           | 4,44           |
|  | COP   |     | 3,80           | 3,75           | 3,95           | 3,80           | 3,80           | 3,65           | 3,60           |
| Heating (A7/W55)   | Capacity  | kW  | 4,40           | 6,00           | 7,50           | 9,50           | 12,00          | 13,80          | 16,00          |
|  | Rated input   | kW  | 1,49           | 2,00           | 2,36           | 3,06           | 3,87           | 4,60           | 5,52           |
|  | COP   |     | 2,95           | 3,00           | 3,18           | 3,10           | 3,10           | 3,00           | 2,90           |
| Cooling (A35/W18)  | Capacity  | kW  | 4,50           | 6,55           | 8,40           | 10,00          | 12,00          | 13,50          | 14,90          |
|  | Rated input   | kW  | 0,81           | 1,34           | 1,66           | 2,08           | 2,44           | 3,00           | 3,48           |
|  | EER   |     | 5,55           | 4,90           | 5,05           | 4,80           | 4,00           | 3,60           | 3,40           |
| Cooling (A35/W7)   | Capacity  | kW  | 4,70           | 7,00           | 7,40           | 8,20           | 11,60          | 12,70          | 14,00          |
|  | Rated input   | kW  | 1,36           | 2,33           | 2,19           | 2,48           | 4,22           | 4,98           | 5,71           |
|  | EER   |     | 3,45           | 3,00           | 3,38           | 3,30           | 2,75           | 2,55           | 2,45           |
| Seasonal energy efficiency LWT 35°C  | SCOP <sup>(1)</sup>   |     | 4,85           | 4,95           | 5,21           | 5,19           | 4,81           | 4,72           | 4,62           |
|  | Rated heat output   | kW  | 5,5            | 6,8            | 8,1            | 9,2            | 12             | 13,7           | 15,2           |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %   | 191            | 195            | 205,6          | 204,8          | 189,4          | 185,7          | 181,7          |
|  | Annual energy consumption                                     | kWh | 2351           | 2845           | 3218           | 3644           | 5152           | 6012           | 6804           |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |     | A+++           | A+++           | A+++           | A+++           | A+++           | A+++           | A+++           |
| Seasonal energy efficiency LWT 55°C  | SCOP <sup>(1)</sup>   |     | 3,31           | 3,52           | 3,36           | 3,49           | 3,45           | 3,47           | 3,41           |
|  | Rated heat output   | kW  | 4,4            | 5,7            | 6,6            | 7,7            | 11,6           | 12,1           | 13             |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %   | 129,5          | 137,9          | 131,6          | 135,7          | 135,1          | 135,6          | 133,2          |
|  | Annual energy consumption                                     | kWh | 2742           | 3343           | 4054           | 4567           | 6927           | 7202           | 7896           |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |     | A+             | A+             | A+             | A+             | A+             | A+             | A+             |
| SEER   | LWT at 7°C  |     | 4,99           | 5,34           | 5,83           | 5,98           | 4,86           | 4,83           | 4,67           |
|  | LWT at 8°C  |     | 7,77           | 8,21           | 8,95           | 8,78           | 7,04           | 6,85           | 6,71           |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   | A   | B16            | B16            | B20            | B20            | B16            | B16            | B16            |
| Compressor   |   |     | Type           |                |                |                |                |                |                |
| Fan  |   |     | Type           |                |                |                |                |                |                |
| Refrigerant  |   |     | Type           |                |                |                |                |                |                |
| Pipe connections   |   |     | Type           |                |                |                |                |                |                |
| Maximum height difference  |   |     | Type           |                |                |                |                |                |                |
| Minimal wire pcs and dimension of cords*                                   |   |     | Type           |                |                |                |                |                |                |
| Control cables: indoor unit to outdoor unit                                |   |     | Type           |                |                |                |                |                |                |
| Bracket spacing  |   |     | Type           |                |                |                |                |                |                |
| Sound pressure level   |   |     | Type           |                |                |                |                |                |                |
| Sound power level  |   |     | Type           |                |                |                |                |                |                |
| Net dimensions (W×D×H)   |   |     | Type           |                |                |                |                |                |                |
| Gross dimensions (W×D×H)   |   |     | Type           |                |                |                |                |                |                |
| Net weight/Gross weight  |   |     | Type           |                |                |                |                |                |                |
| Operating outdoor temperature  | Cooling   | °C  | -5-43          | -5-43          | -5-43          | -5-43          | -5-43          | -5-43          | -5-43          |
|  | Heating   | °C  | -25-35         | -25-35         | -25-35         | -25-35         | -25-35         | -25-35         | -25-35         |
|  | DHW   | °C  | -25-43         | -25-43         | -25-43         | -25-43         | -25-43         | -25-43         | -25-43         |

1. Seasonal energy efficiency class measured under average climate conditions.

Notes:

DHW - Domestic hot water

LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level refer the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55, ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Nr. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than 10mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.



## Aquami Series

# All in Split

---

**Similar to split-Type heat pump, Rotenso All in Split solution consists of an outdoor unit and an indoor unit (hydronic module). The difference is that in the All in Split heat pump the hydronic module has been integrated with the domestic hot water (DHW) tank.**

As a whole, the hydrobox and DHW tank form a compact indoor unit which can be integrated in the hallway furniture, placed in a laundry room or in the kitchen along with other household appliances. Connection of outdoor and indoor units' refrigeration circuits is resistant to freezing, even during prolonged power outages.

The quality of components and solutions, e.g. corrosion-resistant stainless steel DHW tank, ensures many years of trouble-free operation

All-in-one air-to-water heat pumps have been developed in response to market demand for compact units that can be arranged within living spaces. The Rotenso Aquami All in Split heat pump is an excellent solution for small residential buildings without a separate boiler room.



# AQUAMI ALL IN SPLIT



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Integrated  
DHW tank



Tank of stainless  
steel



Integrated Wi-Fi  
module



Control via  
mobile app






## Integrated DHW tank

---

Specific design of the indoor unit is to integrate the hydronic module with the domestic hot water (DHW) tank. As a whole, the hydrobox and DHW tank are enclosed in a single housing to form sleek and compact indoor module suitable for small residential buildings with no separate boiler room.

72

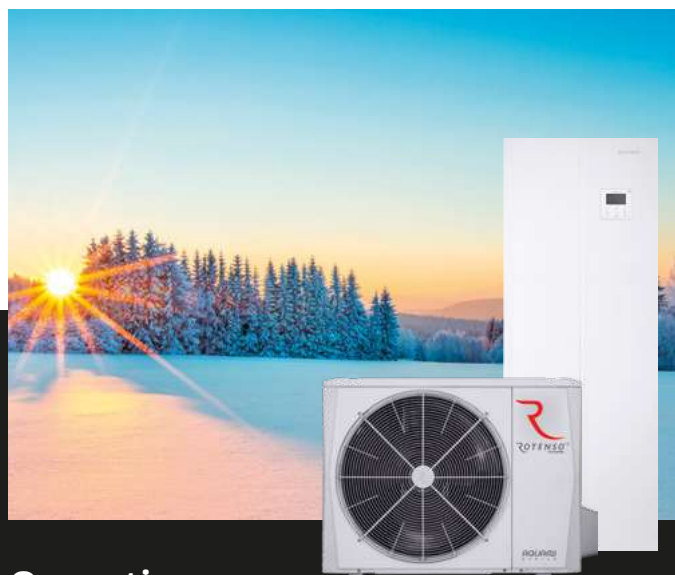

## Operating range down to $-25^{\circ}\text{C}$

Heat pumps are prepared for efficient operation even at extreme outdoor temperatures as low as  $-25^{\circ}\text{C}$ . During the cold winter, they guarantee that supply water for central heating and domestic hot water are heated sufficiently.



## Integrated Wi-Fi module

The Rotenso Aquami Split heat pump can be controlled both by the wired controller and the iLetComfort mobile app, whether you are staying at home or not.



## Tank of stainless steel

---

The quality of components and solutions, e.g. stainless steel DHW tank, ensures many years of trouble-free operation. This corrosion-resistant tank made of high-quality material has no magnetic or titanium anodes that have to be replaced on a regular basis, which translates into greater comfort.



### Supply water temperature of 65°C

If the heat pump is used to heat spaces where radiators are installed the temperature of the supply water in the system must be higher. Rotenso Aquami heat pumps can heat water up to 65°C.



### Control via mobile app

You can use your tablet or smartphone to control the Rotenso Aquami ALL IN Split unit no matter where you are.




































# Aquami All in Split

4-16 kW



## Device features

74

|   |   |   |   |   |  |   |   |
|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| Environmentally friendly refrigerant R32  | Efficient heating   | Energy efficiency class at 35°C A+++  | Energy efficiency class at 55°C A++   | Maximum COP 5,20 <sup>(1)</sup>   | Operating range down to -25°C  | Supply water temperature of 65°C  | Integrated USB port for updates   |
|  |  |  |  |  |  |  |  |
| Energy meter  | Smart Grid functionality  | Twin rotary compressor  | Integrated electric heater  | Outdoor unit drip tray heater   | Compressor crankcase heater  | Indoor unit drip tray   | Easy installation and maintenance   |
|  |  |  |  |  |  |  |  |
| Compact indoor split unit housing   | Maximum installation length up to 30m   | Silent mode   | Built-in Wi-Fi module   | Daily operation schedule  | Configurable weekly schedules  | Vacation mode   | Menu in English   |
|  |  |  |  |  |  |  |  |
| Multilanguage menu  | Integrated temperature sensor   | Weather operating modes (climate curve)   | 2 heating control zones   | Dedicated application   | Disinfection   | DHW circulation pump operation schedules  | Maximum leaving water temperature of 60°C (in DHW mode)                               |
|  |  |  |   |   |  |   |   |
| Integrated DHW tank   | Tank of stainless steel   | Built-in switching valve  |   |   |  |   |   |

1. Refers to units AQS40X1o and AQS80X1o

# Technical specification

| Indoor unit model  |   |                                     | AQS100T190X11                      | AQS100T240X13i                   | AQS160T240X13i                  |                             |                             |                             |                             |
|--|---|-------------------------------------|------------------------------------|----------------------------------|---------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| EAN product code   |   |                                     | 5905567602146                      | 5905567602153                    | 5905567602160                   |                             |                             |                             |                             |
| Compatible outdoor unit model  |   |                                     | AQ540/60/80/100X1o                 | AQ540/60/80/100X1o               | AQ5120/140/160X3o               |                             |                             |                             |                             |
| Operation modes  |   |                                     | Heating and cooling                | Heating and cooling              | Heating and cooling             |                             |                             |                             |                             |
| Leaving water temperature  | Space cooling   | °C                                  | 5-25                               | 5-25                             | 5-25                            |                             |                             |                             |                             |
|  | Space heating   | °C                                  | 25-65                              | 25-65                            | 25-65                           |                             |                             |                             |                             |
|  | DHW (tank)  |                                     | 30-60                              | 30-60                            | 30-60                           |                             |                             |                             |                             |
| Power supply   |   | V-Hz, Ø                             | 220-240-50, 1f                     | 220-240-50, 1f / 380-420-50, 3f  | 220-240-50, 1f / 380-420-50, 3f |                             |                             |                             |                             |
| Rated input / Operating current  |   | W / A                               | 9095 / 13.5                        | 9095 / 13.5                      | 9095 / 13.5                     |                             |                             |                             |                             |
| Sound power level  |   | dB(A)                               | 38 (1) / 40 (2)                    | 38 (1) / 40 (2)                  | 42 (3) / 44 (4)                 |                             |                             |                             |                             |
| Electric heater  | Power supply  |                                     | 220-240-50, 1f                     | 220-240-50, 1f / 380-420-50, 3f  | 220-240-50, 1f / 380-420-50, 3f |                             |                             |                             |                             |
|  | Number of heating stages / Power                              | pcs. / kW                           | 1 / 3                              | 3 / 9 (3 + 3 + 3)                | 3 / 9 (3 + 3 + 3)               |                             |                             |                             |                             |
|  | Maximum operating current                                     | A                                   | 13.3                               | 13.3                             | 13.3                            |                             |                             |                             |                             |
| Net dimensions   |   | W × D × H                           | mm                                 | 600 × 600 × 1683                 | 600 × 600 × 1943                |                             |                             |                             |                             |
| Gross dimensions   |   |                                     | mm                                 | 653 × 653 × 1900                 | 653 × 653 × 2160                |                             |                             |                             |                             |
| Net weight / Gross weight  |   |                                     | kg                                 | 139 / 154                        | 156 / 171                       |                             |                             |                             |                             |
| Water circuit  | Water connections   |                                     | mm (inch)                          | R1" external                     | R1" external                    |                             |                             |                             |                             |
|  | Pressure relief valve   |                                     | MPa                                | 0.3                              | 0.3                             |                             |                             |                             |                             |
|  | Condensate drain  |                                     |                                    | Ø25                              | Ø25                             |                             |                             |                             |                             |
|  | Expansion tank  | Total volume / Actual volume        | l                                  | 8 / 4.8                          | 8 / 4.8                         |                             |                             |                             |                             |
|  |   | Maximum pressure / Initial pressure | MPa                                | 0.3 / 0.1                        | 0.3 / 0.1                       |                             |                             |                             |                             |
|  | PHE / plate heat exchanger                                    | Type                                |                                    | PHE / plate heat exchanger       | PHE / plate heat exchanger      |                             |                             |                             |                             |
|  |   | Minimum flow                        | l/min                              | 6                                | 6                               |                             |                             |                             |                             |
|  | Water pump head   |                                     | m                                  | 9                                | 9                               |                             |                             |                             |                             |
|  | Water pump head   |                                     |                                    | DC                               | DC                              |                             |                             |                             |                             |
|  | DHW tank  | Tank material                       |                                    |                                  | Stainless steel 316L            | Stainless steel 316L        |                             |                             |                             |
| Housing material/colour  |   |                                     | Polyurethane foam, steel / white   | Polyurethane foam, steel / white |                                 |                             |                             |                             |                             |
| Tank capacity  |   | l                                   | 190                                | 240                              |                                 |                             |                             |                             |                             |
| Maximum water temperature (disinfection mode)                              |   | °C                                  | 70                                 | 70                               |                                 |                             |                             |                             |                             |
| Insulation thickness   |   | mm                                  | 45                                 | 45                               |                                 |                             |                             |                             |                             |
| Maximum pressure   |   | bar                                 | 10                                 | 10                               |                                 |                             |                             |                             |                             |
| Refrigerant circuit  |   | Liquid / Gas                        | mm                                 | Ø9,52 (3/8") / Ø15,9 (5/8")      | Ø9,52 (3/8") / Ø15,9 (5/8")     |                             |                             |                             |                             |
| Minimal wire pcs and dimension of cords*                                   |   | pcs × mm <sup>2</sup>               | 5 × 2,5                            | 5 × 2,5                          | 5 × 2,5                         |                             |                             |                             |                             |
| Control cables: indoor unit to outdoor unit                                |   | pcs × mm <sup>2</sup>               | 2 × 0,75 (shielded cable)          | 2 × 0,75 (shielded cable)        | 2 × 0,75 (shielded cable)       |                             |                             |                             |                             |
| Outdoor unit model   |   |                                     | AQS40X1o                           | AQS80X1o                         | AQS100X1o                       | AQS120X3o                   | AQS140X3o                   | AQS160X3o                   |                             |
| EAN product code   |   |                                     | 5905567601071                      | 5905567602054                    | 5905567602061                   | 5905567602078               | 5905567602085               | 5905567602092               | 5905567602108               |
| Compatible indoor unit model   |   |                                     | AQ5100T190X11 / AQ5100T240X13i     |                                  |                                 | AQ5160T240X13i              |                             |                             |                             |
| Power supply   |   |                                     | 220-240-50, 1f                     | 220-240-50, 1f                   | 220-240-50, 1f                  | 220-240-50, 1f              | 380-420-50, 3f              | 380-420-50, 3f              | 380-420-50, 3f              |
| Heating (A7/W35)   | Capacity  | kW                                  | 4,25                               | 6,20                             | 8,30                            | 10,00                       | 12,10                       | 14,50                       | 16,00                       |
|  | Rated input   | kW                                  | 0,82                               | 1,24                             | 1,60                            | 2,00                        | 2,44                        | 3,09                        | 3,56                        |
|  | COP   |                                     | 5,20                               | 5,00                             | 5,20                            | 5,00                        | 4,95                        | 4,70                        | 4,50                        |
| Heating (A7/W45)   | Capacity  | kW                                  | 4,35                               | 6,35                             | 8,20                            | 10,00                       | 12,30                       | 14,20                       | 16,00                       |
|  | Rated input   | kW                                  | 1,14                               | 1,69                             | 2,08                            | 2,63                        | 3,24                        | 3,89                        | 4,44                        |
|  | COP   |                                     | 3,80                               | 3,75                             | 3,95                            | 3,80                        | 3,65                        | 3,65                        | 3,60                        |
| Heating (A7/W55)   | Capacity  | kW                                  | 4,40                               | 6,00                             | 7,50                            | 9,50                        | 12,00                       | 13,80                       | 16,00                       |
|  | Rated input   | kW                                  | 1,49                               | 2,00                             | 2,36                            | 3,06                        | 3,87                        | 4,60                        | 5,52                        |
|  | COP   |                                     | 2,95                               | 3,00                             | 3,18                            | 3,10                        | 3,10                        | 3,00                        | 2,90                        |
| Cooling (A35/W18)  | Capacity  | kW                                  | 4,50                               | 6,55                             | 8,40                            | 10,00                       | 12,00                       | 13,50                       | 14,90                       |
|  | Rated input   | kW                                  | 0,81                               | 1,34                             | 1,66                            | 2,08                        | 3,00                        | 3,75                        | 4,38                        |
|  | EER   |                                     | 5,55                               | 4,90                             | 5,05                            | 4,80                        | 4,00                        | 3,60                        | 3,40                        |
| Cooling (A35/W7)   | Capacity  | kW                                  | 4,70                               | 7,00                             | 7,40                            | 8,20                        | 11,60                       | 12,70                       | 14,00                       |
|  | Rated input   | kW                                  | 1,36                               | 2,33                             | 2,19                            | 2,48                        | 4,22                        | 4,98                        | 5,71                        |
|  | EER   |                                     | 3,45                               | 3,00                             | 3,38                            | 3,30                        | 2,75                        | 2,55                        | 2,45                        |
| Seasonal energy efficiency LWT 35°C  | SCOP <sup>(1)</sup>   |                                     | 4,85                               | 4,95                             | 5,21                            | 5,19                        | 4,81                        | 4,72                        | 4,62                        |
|  | Rated heat output   | kW                                  | 5,5                                | 6,8                              | 8,1                             | 9,2                         | 12                          | 13,7                        | 15,2                        |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 191                                | 195                              | 205,6                           | 204,8                       | 189,4                       | 185,7                       | 181,7                       |
|  | Annual energy consumption                                     | kWh                                 | 2351                               | 2845                             | 3218                            | 3644                        | 5152                        | 6012                        | 6804                        |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A+++                               | A+++                             | A+++                            | A+++                        | A+++                        | A+++                        | A+++                        |
| Seasonal energy efficiency LWT 55°C  | SCOP <sup>(2)</sup>   |                                     | 3,31                               | 3,52                             | 3,36                            | 3,49                        | 3,45                        | 3,47                        | 3,41                        |
|  | Rated heat output   | kW                                  | 4,4                                | 5,7                              | 6,6                             | 7,7                         | 11,6                        | 12,1                        | 13                          |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 129,5                              | 137,9                            | 131,6                           | 135,7                       | 135,1                       | 135,6                       | 133,2                       |
|  | Annual energy consumption                                     | kWh                                 | 2742                               | 3343                             | 4054                            | 4567                        | 6927                        | 7202                        | 7896                        |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A++                                | A++                              | A++                             | A++                         | A++                         | A++                         | A++                         |
| SEER   | LWT at 7°C  |                                     | 4,99                               | 5,34                             | 5,83                            | 5,98                        | 4,86                        | 4,83                        | 4,67                        |
|  | LWT at 8°C  |                                     | 7,77                               | 8,21                             | 8,95                            | 8,78                        | 7,04                        | 6,85                        | 6,71                        |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   |                                     | A                                  | B16                              | B16                             | B20                         | B20                         | B16                         | B16                         |
| Compressor   |   |                                     | Twin rotary inverter compressor DC |                                  |                                 |                             |                             |                             |                             |
| Fan  |   |                                     | Brushless DC motor / BLDC          |                                  |                                 |                             |                             |                             |                             |
| Quantity   |   |                                     | 1                                  | 1                                | 1                               | 1                           | 1                           | 1                           | 1                           |
| Refrigerant  | Type/ GWP   |                                     | R32 / 675                          | R32 / 675                        | R32 / 675                       | R32 / 675                   | R32 / 675                   | R32 / 675                   | R32 / 675                   |
|  | Charged (<15m)  | kg                                  | 1,5                                | 1,5                              | 1,65                            | 1,65                        | 1,84                        | 1,84                        | 1,84                        |
|  |   | TCO <sub>eq</sub>                   | 1,02                               | 1,02                             | 1,11                            | 1,11                        | 1,24                        | 1,24                        | 1,24                        |
| Pipe connections   | Liquid / Gas  |                                     | mm                                 | Ø6,35 (1/4") / Ø15,9 (5/8")      | Ø6,35 (1/4") / Ø15,9 (5/8")     | Ø9,52 (3/8") / Ø15,9 (5/8") | Ø9,52 (3/8") / Ø15,9 (5/8") | Ø9,52 (3/8") / Ø15,9 (5/8") | Ø9,52 (3/8") / Ø15,9 (5/8") |
|  | Minimum installation length                                   |                                     | m                                  | 2                                | 2                               | 2                           | 2                           | 2                           | 2                           |
|  | Maximum installation length                                   |                                     | m                                  | 30                               | 30                              | 30                          | 30                          | 30                          | 30                          |
|  | Additional amount of refrigerant for over 15 linear meters    |                                     | g/m                                | 20                               | 20                              | 38                          | 38                          | 38                          | 38                          |
| Maximum height difference  | Outdoor unit above the indoor unit                            |                                     | m                                  | 20                               | 20                              | 20                          | 20                          | 20                          | 20                          |
|  | Outdoor unit below the indoor unit                            |                                     | m                                  | 20                               | 20                              | 20                          | 20                          | 20                          | 20                          |
| Minimal wire pcs and dimension of cords*                                   |   | pcs × mm <sup>2</sup>               | 3 × 2,5                            | 3 × 2,5                          | 3 × 4                           | 3 × 4                       | 5 × 2,5                     | 5 × 2,5                     | 5 × 2,5                     |
| Control cables: indoor unit to outdoor unit                                |   | pcs × mm <sup>2</sup>               | 2 × 0,75 (shielded cable)          |                                  |                                 |                             |                             |                             |                             |
| Bracket spacing  |   | W × D                               | 663 × 375                          | 663 × 375                        | 656 × 456                       | 656 × 456                   | 656 × 456                   | 656 × 456                   | 656 × 456                   |
| Sound pressure level   |   | dB(A)                               | 44                                 | 45                               | 46                              | 49                          | 50                          | 51                          | 55                          |
| Sound power level  |   |                                     | 56                                 | 58                               | 59                              | 60                          | 64                          | 65                          | 68                          |
| Net dimensions   |   | W × D × H                           | mm                                 | 1008 × 426 × 712                 | 1008 × 426 × 712                | 1118 × 523 × 865            | 1118 × 523 × 865            | 1118 × 523 × 865            | 1118 × 523 × 865            |
| Gross dimensions   |   | W × D × H                           | mm                                 | 1065 × 485 × 800                 | 1065 × 485 × 800                | 1180 × 560 × 890            | 1180 × 560 × 890            | 1180 × 560 × 890            | 1180 × 560 × 890            |
| Net weight/Gross weight  |   |                                     | kg                                 | 58 / 63,5                        | 58 / 63,5                       | 75 / 89                     | 75 / 86                     | 112 / 125,5                 | 112 / 125,5                 |
| Operating outdoor temperature  | Cooling   | °C                                  | -5-43                              | -5-43                            | -5-43                           | -5-43                       | -5-43                       | -5-43                       | -5-43                       |
|  | Heating   | °C                                  | -25-35                             | -25-35                           | -25-35                          | -25-35                      | -25-35                      | -25-35                      | -25-35                      |
|  | DHW   | °C                                  | -25-43                             | -25-43                           | -25-43                          | -25-43                      | -25-43                      | -25-43                      | -25-43                      |

(1) Applies to systems with outdoor unit models AQ540X1o and AQ560X1o. (2) Applies to systems with outdoor unit models AQ580X1o and AQ5100X1o.

(3) Applies to systems with outdoor unit model AQ5120X1o. (4) Applies to systems with outdoor unit models AQ5140X1o and AQ5160X1o.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than IΔn: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.



## Aquami Series **Monoblock**

---

**Rotenso Aquami Monoblock is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing designed for outdoor installation to make the installation works easier and faster.**

Rotenso Aquami Monoblock pump is the best solution for building owners who either have no space or do not want to install additional hydronic module inside the building.

Rotenso Aquami Monoblock heat pump features the highest energy efficiency class A+++.

**COP** coefficient, which is a ratio of useful heating power to the consumed electric energy, is **5.15\*** in monoblock pumps, which means that the amount of heating energy that the Rotenso Aquami Monoblock heat pump can produce is

more than five times higher than the amount of consumed electric energy.

Heat pump double door housing is designed to provide an easy access to all its components, while operating parameters can be quickly modified and monitored in real time from the user interface.

Rotenso Aquami Monoblock heat pump is equipped with an anti-freeze system.

**\* Maximum COP for AQM80X1**



# AQUAMI MONO BLOCK



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Smart Grid  
functionality



Controller  
equipped with a  
temperature  
sensor



Integrated Wi-Fi  
module



Control via  
mobile app





## Controller equipped with a temperature sensor

If the sensor detects a difference between the set temperature and the actual temperature in the room, the heat pump will automatically operate to reach the desired temperature inside the building.

78



### Supply water temperature of max. 65°C

If the heat pump is used to heat spaces where radiators are installed, temperature of the supply water in the system must be higher. Rotenso Aquami heat pump can heat water up to 65°C.



### Integrated Wi-Fi module

The Rotenso Aquami Monoblock pump can be controlled both by the wired controller and the iLetComfort mobile app, whether you are staying at home or not.



## Smart Grid functionality

---

The heat pump controller is designed to work with the „Smart Grid“. With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.

79



### Operating range down to -25°C

The pump is prepared to operate efficiently even at extreme outdoor temperatures down to -25°C. During the cold winter, it guarantees that supply water for central heating and domestic hot water is heated sufficiently.




### Control via mobile app

You can use your tablet or smartphone to control the Rotenso Aquami Monoblock unit no matter where you are.




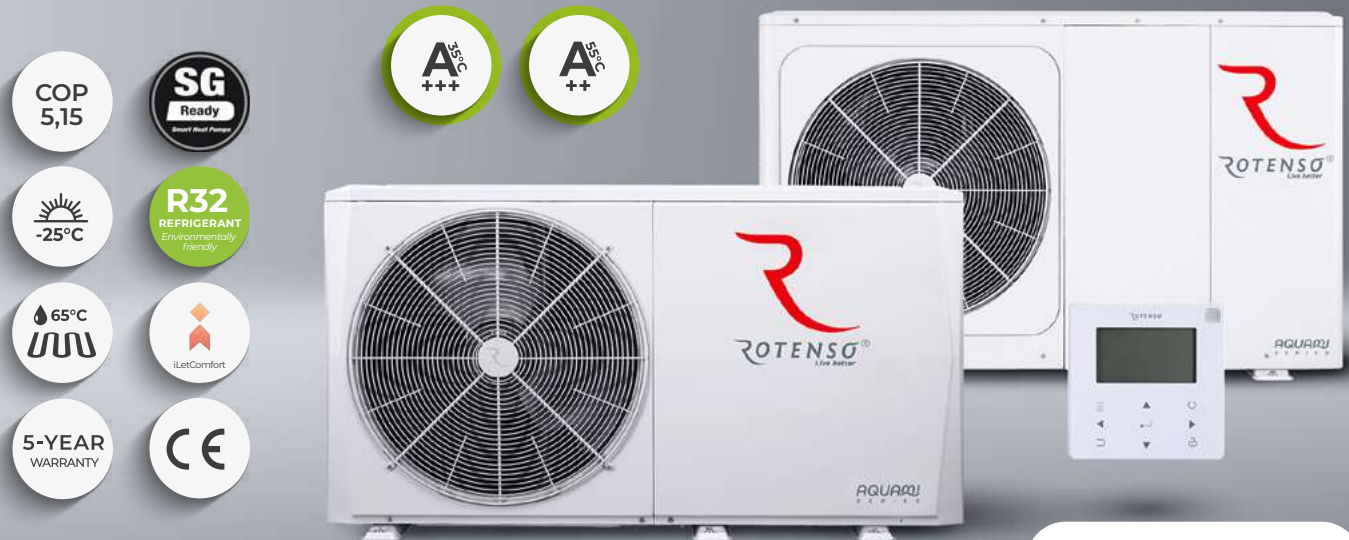


























# Aquami Monoblock

4-16 kW



## Device features

80

- |   |   |   |   |  |  |  |  |
|---|---|---|---|--|--|--|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating            | <br>Energy efficiency class at 35°C A+++ | <br>Energy efficiency class at 55°C A++      | <br>Maximum COP 5,15 <sup>(1)</sup>                         | <br>Operating range down to -25°C       | <br>Supply water temperature of 65°C  | <br>Integrated USB port for updates         |
| <br>Energy meter                             | <br>Smart Grid functionality     | <br>Twin rotary compressor               | <br>Integrated electric heater               | <br>Outdoor unit drip tray heater                           | <br>Compressor crankcase heater         | <br>Easy installation and maintenance | <br>Silent mode                             |
| <br>Wired controller Wi-Fi module            | <br>Configurable daily schedules | <br>Configurable weekly schedules        | <br>Vacation mode                            | <br>Menu in English   | <br>Multilanguage menu                  | <br>Integrated temperature sensor     | <br>Weather operating modes (climate curve) |
| <br>2 heating control zones                  | <br>Dedicated application        | <br>Disinfection                         | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 60°C (in DHW mode) | <br>Prepared to create a cascade system |  |  |

1. Refers to unit AQM80X1

# Technical specification

| Outdoor unit model   |   |                                     | AQM40X1               | AQM60X1                  | AQM80X1        | AQM100X1       | AQM120X3       | AQM140X3       | AQM160X3       |                                    |                          |  |
|--|---|-------------------------------------|-----------------------|--------------------------|----------------|----------------|----------------|----------------|----------------|------------------------------------|--------------------------|--|
| EAN product code   |   |                                     | 5905567602177         | 5905567602184            | 5905567602191  | 5905567602207  | 5905567602214  | 5905567602221  | 5905567602238  |                                    |                          |  |
| Power supply   |   |                                     | V-Hz, Ø               | 220-240-50, 1f           | 220-240-50, 1f | 220-240-50, 1f | 220-240-50, 1f | 380-420-50, 3f | 380-420-50, 3f | 380-420-50, 3f                     |                          |  |
| Heating (A7/W35)   | Capacity  | kW                                  | 4,20                  | 6,35                     | 8,40           | 10,00          | 12,10          | 14,50          | 15,90          |                                    |                          |  |
|  | Rated input   | kW                                  | 0,82                  | 1,28                     | 1,63           | 2,02           | 2,44           | 3,15           | 3,53           |                                    |                          |  |
|  | COP   |                                     | 5,10                  | 4,95                     | 5,15           | 4,95           | 4,95           | 4,60           | 4,50           |                                    |                          |  |
| Heating (A7/W45)   | Capacity  | kW                                  | 4,30                  | 6,30                     | 8,10           | 10,00          | 12,30          | 14,10          | 16,00          |                                    |                          |  |
|  | Rated input   | kW                                  | 1,13                  | 1,70                     | 2,10           | 2,67           | 3,32           | 3,92           | 4,57           |                                    |                          |  |
|  | COP   |                                     | 3,80                  | 3,70                     | 3,85           | 3,75           | 3,70           | 3,60           | 3,50           |                                    |                          |  |
| Heating (A7/W55)   | Capacity  | kW                                  | 4,40                  | 6,00                     | 7,50           | 9,50           | 11,90          | 13,80          | 16,00          |                                    |                          |  |
|  | Rated input   | kW                                  | 1,49                  | 2,03                     | 2,36           | 3,06           | 3,90           | 4,68           | 5,61           |                                    |                          |  |
|  | COP   |                                     | 2,95                  | 2,95                     | 3,18           | 3,10           | 3,05           | 2,95           | 2,85           |                                    |                          |  |
| Cooling (A35/W18)  | Capacity  | kW                                  | 4,50                  | 6,50                     | 8,30           | 9,90           | 12,00          | 13,50          | 14,90          |                                    |                          |  |
|  | Rated input   | kW                                  | 0,82                  | 1,35                     | 1,64           | 2,18           | 3,04           | 3,75           | 4,38           |                                    |                          |  |
|  | EER   |                                     | 5,50                  | 4,80                     | 5,05           | 4,55           | 3,95           | 3,60           | 3,40           |                                    |                          |  |
| Cooling (A35/W7)   | Capacity  | kW                                  | 4,70                  | 7,00                     | 7,45           | 8,20           | 11,50          | 12,40          | 14,00          |                                    |                          |  |
|  | Rated input   | kW                                  | 1,36                  | 2,33                     | 2,22           | 2,52           | 4,18           | 4,96           | 5,60           |                                    |                          |  |
|  | EER   |                                     | 3,45                  | 3,00                     | 3,35           | 3,25           | 2,75           | 2,50           | 2,50           |                                    |                          |  |
| Seasonal energy efficiency LWT 35°C  | SCOP <sup>(1)</sup>   |                                     | 4,85                  | 4,95                     | 5,21           | 5,19           | 4,81           | 4,72           | 4,62           |                                    |                          |  |
|  | Rated heat output   | kW                                  | 5,5                   | 6,8                      | 8,1            | 9,2            | 12             | 13,7           | 15,2           |                                    |                          |  |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 191                   | 195                      | 205,6          | 204,8          | 189,4          | 185,7          | 181,7          |                                    |                          |  |
|  | Annual energy consumption                                     | kWh                                 | 2351                  | 2845                     | 3218           | 3644           | 5153           | 6013           | 6805           |                                    |                          |  |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A+++                  | A+++                     | A+++           | A+++           | A+++           | A+++           | A+++           |                                    |                          |  |
| Seasonal energy efficiency LWT at 55°C                                     | SCOP <sup>(1)</sup>   |                                     | 3,31                  | 3,52                     | 3,36           | 3,49           | 3,45           | 3,47           | 3,41           |                                    |                          |  |
|  | Rated heat output   | kW                                  | 4,40                  | 5,70                     | 6,60           | 7,70           | 11,60          | 12,10          | 13,00          |                                    |                          |  |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 129,5                 | 137,9                    | 131,6          | 135,7          | 135,1          | 135,6          | 133,3          |                                    |                          |  |
|  | Annual energy consumption                                     | kWh                                 | 2742                  | 3343                     | 4054           | 4567           | 6927           | 7202           | 7896           |                                    |                          |  |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A++                   | A++                      | A++            | A++            | A++            | A++            | A++            |                                    |                          |  |
| SEER   | LWT at 7°C  |                                     | 4,98                  | 5,34                     | 5,83           | 5,98           | 4,86           | 4,83           | 4,67           |                                    |                          |  |
|  | LWT at 18°C   |                                     | 7,76                  | 8,21                     | 8,95           | 8,78           | 7,04           | 6,85           | 6,71           |                                    |                          |  |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   |                                     | A                     | B25                      | B32            | B32            | B32            | B25            | B25            | B25                                |                          |  |
| Compressor   |   |                                     | Type                  |                          |                |                |                |                |                | Twin rotary inverter compressor DC |                          |  |
| Fan  |   |                                     | Type                  |                          |                |                |                |                |                | Brushless DC motor / BLDC          |                          |  |
| Refrigerant  |   |                                     | Quantity              |                          |                |                |                |                |                | 1                                  |                          |  |
| Refrigerant  |   |                                     | Type / GWP            |                          |                |                |                |                |                | R32 / 675                          |                          |  |
| Refrigerant  |   |                                     | Charged (<15m)        |                          |                |                |                |                |                | kg                                 |                          |  |
| Refrigerant  |   |                                     | Charged (<15m)        |                          |                |                |                |                |                | TCO <sub>eq</sub>                  |                          |  |
| Minimal wire pcs and dimension of cords*                                   |   |                                     | pcs × mm <sup>2</sup> |                          |                |                |                |                |                | 3 × 4                              |                          |  |
| Bracket spacing  |   |                                     | W1 × W2 × D           |                          |                |                |                |                |                | mm                                 |                          |  |
| Sound pressure level   |   |                                     | dB(A)                 |                          |                |                |                |                |                | 45                                 |                          |  |
| Sound power level  |   |                                     | dB(A)                 |                          |                |                |                |                |                | 55                                 |                          |  |
| Net dimensions   |   |                                     | W × D × H             |                          |                |                |                |                |                | mm                                 |                          |  |
| Gross dimensions   |   |                                     | W × D × H             |                          |                |                |                |                |                | mm                                 |                          |  |
| Net weight / Gross weight  |   |                                     | kg                    |                          |                |                |                |                |                | 91/112                             |                          |  |
| Operating outdoor temperature  | Cooling   | °C                                  | -5-43                 |                          |                |                |                |                |                | -5-43                              |                          |  |
|  | Heating   | °C                                  | -25-35                |                          |                |                |                |                |                | -25-35                             |                          |  |
|  | DHW   | °C                                  | -25-43                |                          |                |                |                |                |                | -25-43                             |                          |  |
| Operation modes  |   |                                     | Heating and cooling   |                          |                |                |                |                |                | 5-25                               |                          |  |
| Leaving water temperature  | Space cooling   | °C                                  | 5-25                  |                          |                |                |                |                |                | 5-25                               |                          |  |
|  | Space heating   | °C                                  | 25-65                 |                          |                |                |                |                |                | 25-65                              |                          |  |
|  | DHW (tank)  | °C                                  | 30-60                 |                          |                |                |                |                |                | 30-60                              |                          |  |
| Electric heater  | Power supply  | V-Hz, Ø                             | 220-240-50, 1f        |                          |                |                |                |                |                | 220-240-50, 1f                     |                          |  |
|  | Number of heating stages / Power                              |                                     | 1 / 3                 |                          |                |                |                |                |                | 1 / 3                              |                          |  |
|  | Maximum operating current                                     | A                                   | 13,5                  |                          |                |                |                |                |                | 13,5                               |                          |  |
| Water circuit  | Water connections   |                                     | mm (inch)             | 33 mm (G1" BSP) external |                |                |                |                |                |                                    | 33 mm (G1" BSP) external |  |
|  | Pressure relief valve   |                                     | MPa                   | 0,3                      |                |                |                |                |                |                                    | 0,3                      |  |
|  | Condensate drain  |                                     |                       | 16                       |                |                |                |                |                |                                    | 16                       |  |
|  | Expansion tank  | Total volume / Actual volume        | l                     | 8 / 4,8                  |                |                |                |                |                |                                    | 8 / 4,8                  |  |
|  |   | Maximum pressure / Initial pressure | MPa                   | 0,3 / 0,1                |                |                |                |                |                |                                    | 0,3 / 0,1                |  |
|  | Heat exchanger  |                                     | Type                  | PHE / plate heat hanger  |                |                |                |                |                |                                    | PHE / plate heat hanger  |  |
|  | Heat exchanger  |                                     | Minimum flow          | l/min                    |                |                |                |                |                |                                    | 6                        |  |
|  | Water pump head   |                                     | m                     | 9                        |                |                |                |                |                |                                    | 9                        |  |
| Water pump type  |   |                                     | DC                    |                          |                |                |                |                |                | DC                                 |                          |  |
| Total water volume   |   | l                                   | 3,2                   |                          |                |                |                |                |                | 3,2                                |                          |  |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than IΔn: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.



## Aquami Series **Big Mono**

---

**Rotenso Aquami Big Mono is a monoblock Type heat pump with high heating capacities from 22 to 30 kW. In this double-fan Rotenso Aquami Big Mono pump, the refrigerating and hydronic modules are enclosed in a single, compact unit housing for outdoor installation.**

This Type of solution makes heat pump installation faster and easier, and requires no additional space for the hydronic module inside the building.

Double-fan design allowed to create high-capacity units to provide building owners who demand high heating power with cost effective solution alternative to cascade arrangement of combined several smaller units. Heat pump housing is designed to provide an easy access to all its

components, while operating parameters can be quickly modified and monitored in real time from the user interface.

Modern double-fan design of the Rotenso heat pump and its high efficiency even at low temperatures make it a perfect choice for heating homes, stores, commercial premises and offices with high heating power demand.



# AQUAMI BIG MONO



Operating range  
down to -25°C



Supply water  
temperature  
of 60°C



Smart Grid  
functionality



Controller  
equipped with  
a temperature  
sensor



Integrated Wi-Fi  
module



Control via  
mobile app





## Controller equipped with a temperature sensor

If the sensor detects a difference between the set temperature and the actual temperature in the room, the heat pump will automatically operate to reach the desired temperature inside the building.

84



## Supply water temperature of max. 60°C

If the heat pump is used to heat spaces where radiators are installed the temperature of the supply water in the system must be higher. Rotenso Aquami heat pumps can heat water up to 60°C.



## Integrated Wi-Fi module

The Rotenso Aquami Big Mono pump can be controlled both by the wired controller and the iLetComfort mobile app, whether you are staying at home or not.



## Smart Grid functionality

---

The heat pump controller is designed to work with the „Smart Grid“. With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.

85



## Operating range down to -25°C

The pump is prepared to operate efficiently even at extreme outdoor temperatures down to -25°C. During the cold winter, it guarantees that supply water for central heating and domestic hot water is heated sufficiently.



## Control via mobile app































You can use your tablet or smartphone to control the Rotenso Aquami Big Mono unit no matter where you are.

# Aquami Big Mono

22-30 kW



## Device features

- |   |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating             | <br>Energy efficiency class at 35°C A+++ <sup>(1)</sup> | <br>Energy efficiency class at 55°C A++ <sup>(1)</sup>      | <br>Maximum COP 4,40 <sup>(1)</sup>     | <br>Operating range down to -25°C     | <br>Supply water temperature of 60°C        | <br>Integrated USB port for updates |
| <br>Energy meter                             | <br>Smart Grid functionality      | <br>Twin rotary compressor                              | <br>Outdoor unit drip tray heater                           | <br>Compressor crankcase heater         | <br>Easy installation and maintenance | <br>Silent mode                             | <br>Wired controller Wi-Fi module   |
| <br>Daily operation schedule                 | <br>Configurable weekly schedules | <br>Vacation mode                                       | <br>Menu in English   | <br>Multilanguage menu                  | <br>Integrated temperature sensor     | <br>Weather operating modes (climate curve) | <br>2 heating control zones         |
| <br>Dedicated application                    | <br>Disinfection                  | <br>DHW circulation pump operation schedules            | <br>Maximum leaving water temperature of 60°C (in DHW mode) | <br>Prepared to create a cascade system | <br>Modbus Protocol                   |  |  |

1. Refers to unit AQM220X3

# Technical specification

| Outdoor unit model   |   |                                     | AQM220X3                           | AQM300X3                   |  |
|--|---|-------------------------------------|------------------------------------|----------------------------|--|
| EAN product code   |   |                                     | 5905567602245                      | 5905567602252              |  |
| Power supply   |   | V-Hz, Ø                             | 380-420-50, 3f                     | 380-420-50, 3f             |  |
| Heating (A7/W35)   | Capacity  | kW                                  | 22,00                              | 30,10                      |  |
|  | Rated input   | kW                                  | 5,00                               | 7,70                       |  |
|  | COP   |                                     | 4,40                               | 3,91                       |  |
| Heating (A7/W45)   | Capacity  | kW                                  | 22,00                              | 30,00                      |  |
|  | Rated input   | kW                                  | 6,47                               | 10,35                      |  |
|  | COP   |                                     | 3,40                               | 2,90                       |  |
| Heating (A7/W55)   | Capacity  | kW                                  | 22,00                              | 30,00                      |  |
|  | Rated input   | kW                                  | 8,30                               | 13,04                      |  |
|  | COP   |                                     | 2,65                               | 2,30                       |  |
| Cooling (A35/W18)  | Capacity  | kW                                  | 23,00                              | 31,00                      |  |
|  | Rated input   | kW                                  | 5,00                               | 7,75                       |  |
|  | EER   |                                     | 4,60                               | 4,00                       |  |
| Cooling (A35/W7)   | Capacity  | kW                                  | 21,00                              | 29,50                      |  |
|  | Rated input   | kW                                  | 7,12                               | 11,57                      |  |
|  | EER   |                                     | 2,95                               | 2,55                       |  |
| Seasonal energy efficiency LWT at 35°C                                     | SCOP <sup>(1)</sup>   |                                     | 4,53                               | 4,20                       |  |
|  | Rated heat output   | kW                                  | 22                                 | 29                         |  |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 178                                | 165                        |  |
|  | Annual energy consumption                                     | kWh                                 | 10108                              | 14165                      |  |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A+++                               | A++                        |  |
| Seasonal energy efficiency LWT at 55°C                                     | SCOP <sup>(1)</sup>   |                                     | 3,23                               | 3,15                       |  |
|  | Rated heat output   | kW                                  | 22                                 | 30                         |  |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                                   | 126                                | 123                        |  |
|  | Annual energy consumption                                     | kWh                                 | 14390                              | 19316                      |  |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                                     | A++                                | A+                         |  |
| SEER   | LWT at 7°C  |                                     | 4,70                               | 4,49                       |  |
|  | LWT at 18°C   |                                     | 5,67                               | 5,71                       |  |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   | A                                   | B20                                | B25                        |  |
| Compressor   |   | Type                                | Twin rotary inverter compressor DC |                            |  |
| Fan  | Type  |                                     | Brushless DC motor / BLDC          |                            |  |
|  | Quantity  |                                     | 2                                  |                            |  |
| Refrigerant  | Type / GWP  |                                     | R32 / 675                          |                            |  |
|  | Quantity  |                                     | 5                                  |                            |  |
|  | TCO <sub>eq</sub>   |                                     | 3,375                              |                            |  |
| Minimal wire pcs and dimension of cords*                                   |   | pcs × mm <sup>2</sup>               | 5 × 4                              |                            |  |
| Bracket spacing  |   | W1 × W2 × D                         | 668 × 206 × 494                    |                            |  |
| Sound pressure level   |   | dB(A)                               | 59,8                               |                            |  |
| Sound power level  |   | dB(A)                               | 73                                 |                            |  |
| Net dimensions   |   | W × D × H                           | 1129 × 528 × 1558                  |                            |  |
| Gross dimensions   |   | W × D × H                           | 1220 × 565 × 1735                  |                            |  |
| Net weight / Gross weight  |   | kg                                  | 177/206                            |                            |  |
| Operating outdoor temperature  | Cooling   | °C                                  | -5~46                              |                            |  |
|  | Heating   | °C                                  | -25~35                             |                            |  |
|  | CWU   | °C                                  | -25~43                             |                            |  |
| Operation modes  |   |                                     | Heating and cooling                |                            |  |
| Leaving water temperature  | Space cooling   | °C                                  | 5~25                               |                            |  |
|  | Space heating   | °C                                  | 25~60                              |                            |  |
|  | DHW (tank)  | °C                                  | 30~60                              |                            |  |
| Electric heater  | Power supply  | V-Hz, Ø                             | none                               |                            |  |
|  | Number of heating stages / Power                              | pcs / kW                            | none / none                        |                            |  |
|  | Maximum operating current                                     | A                                   | none                               |                            |  |
| Water circuit  | Water connections   |                                     | 41,91 mm (G5/4" BSP) external      |                            |  |
|  | Pressure relief valve   |                                     | 0,3                                |                            |  |
|  | Condensate drain  |                                     | 16                                 |                            |  |
|  | Expansion tank  | Total volume / Actual volume        | l                                  | 8 / 4,8                    |  |
|  |   | Maximum pressure / Initial pressure | MPa                                | 1 / 0,1                    |  |
|  | Heat exchanger  | Type                                |                                    | PHE / plate heat exchanger |  |
|  |   | Minimum flow                        | l/min                              | 27                         |  |
|  | Water pump head   |                                     | m                                  | 12                         |  |
|  | Water pump type   |                                     |                                    | DC                         |  |
| Total water volume   |   | l                                   | 3,5                                |                            |  |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013, (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>Δn</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.



## Aquami Series

# Multi Split

---

**Rotenso Aquami Multi Split intended for residential and commercial facilities is a combination air-to-water and air-to-air heat pump system with a capacity of 8 kW. Property owners pay their attention not only to economic aspects but also to stylish design of the solution, therefore, they prefer a single outdoor unit by the building instead of two.**

The outdoor unit of the Multi Split HIRO H100Xm4 system and indoor unit of the Aquami Multi Split heat pump with a heating capacity of 8 kW were combined in a single system to offer space heating or cooling with air using air conditioners, space heating with water using underfloor heating, radiators or fan coil units, as well as domestic hot water heating.

Up to 4 indoor units, e.g. up to 3 Multi Series wall, cassette, console or duct type air conditioners

based on the air-to-air system with a total capacity of up to 12 kW, can be connected to the Aquami Multi Split system.

The advantage of the hybrid solution is the savings resulting from the purchase, installation and maintenance of a single system, instead of a separate air conditioning and heating systems, which meets the requirements of efficient heating and cooling at the same time.



# AQUAMI MULTI SPLIT



Operating range  
down to -20°C  
(air-to-water)



Supply water  
temperature  
of 60°C



Efficient  
heating




Water (DHW)  
temperature  
of 55°C



Integrated Wi-Fi  
module



Control via  
mobile app

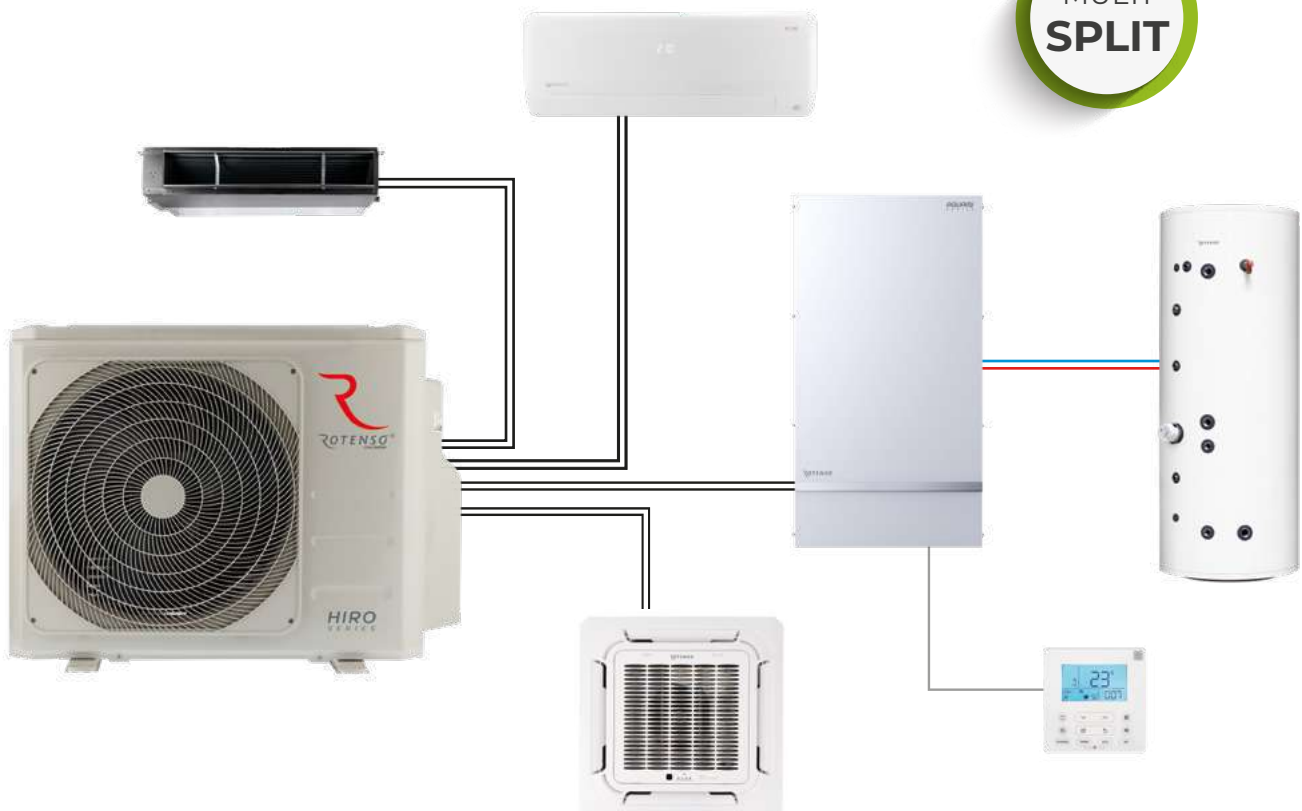



90

## Water supply (DHW) **temperature 55°C**

---

Heat pump is an independent source of heating and hot water for your home. During the cold winter, it guarantees that supply water for central heating and domestic hot water are heated to 55°C.




## **Supply water temperature of 60°C**

If the heat pump is used to heat spaces where radiators are installed, temperature of the supply water in the system must be higher. Rotenso Aquami heat pumps can heat water up to 60°C.



## **Integrated Wi-Fi module**

The Rotenso Aquami Multi Split heat pump can be controlled both by the wired controller and the NET HOME PLUS mobile app, whether you are staying at home or not.

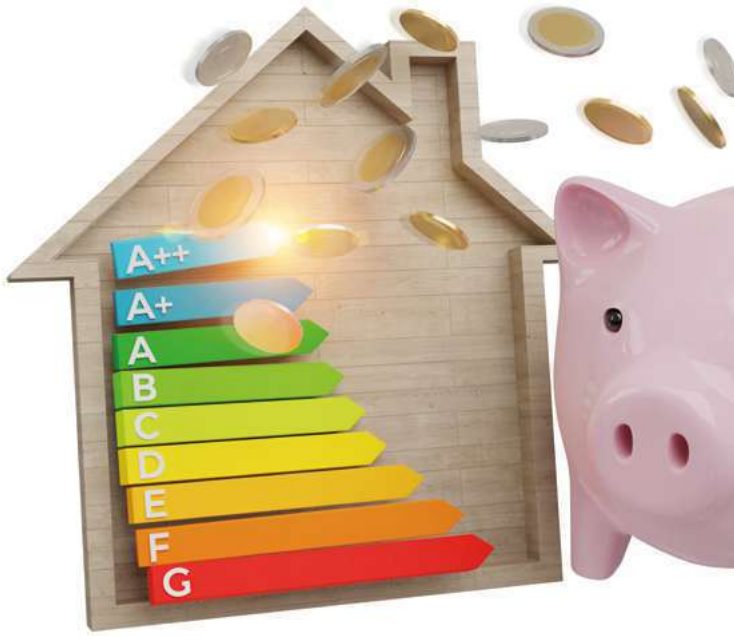

## Wydajne ogrzewanie **COP 4,40\***

The COP coefficient is the ratio of the useful heating power to the electricity consumed. It indicates heating efficiency of the heat pump. The amount of heating energy produced by the Aquami Multi Split heat pump can be five times the amount of the consumed electric energy.

*\* maximum COP*

91



### **Operating range down to -20°C (air-to-water)**

The pump is prepared to operate efficiently even at extreme outdoor temperatures down to -20°C. During the cold winter, they guarantee that supply water for central heating and domestic hot water are heated sufficiently.



### **Control via mobile app**

You can use your tablet or smartphone to control the Rotoso Aquami unit in Multisplit mode no matter where you are.































# Aquami Multi Split

8 kW



## Device features

92

- |   |  |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                     | <br>Energy efficiency class at 35°C A++      | <br>Energy efficiency class at 55°C A+                      | <br>Maximum COP 4,40                    | <br>Operating range down to -20°C | <br>Supply water temperature of 60°C  | <br>Integrated USB port for updates |
| <br>Energy meter                             | <br>Twin rotary compressor                | <br>Integrated electric heater               | <br>Outdoor unit drip tray heater                           | <br>Compressor crankcase heater         | <br>Indoor unit drip tray         | <br>Easy installation and maintenance | <br>Silent mode                     |
| <br>Compact indoor split unit housing        | <br>Maximum installation length up to 80m | <br>Built-in Wi-Fi module                    | <br>Daily operation schedule                                | <br>Configurable weekly schedules       | <br>Vacation mode                 | <br>Menu in English                   | <br>Multilanguage menu              |
| <br>Dedicated application                    | <br>Disinfection                          | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 55°C (in DHW mode) | <br>Prepared to create a cascade system | <br>Modbus Protocol               |  |  |

# Technical specification indoor unit

| Indoor unit model                           |                   |                        | AQMS80X1i R13            |
|---|-------------------|------------------------|--------------------------|
| EAN product code                            |                   |                        | 5905567602269            |
| Compatible outdoor unit model               |                   |                        | H100Xm4                  |
| Operating mode                              |                   |                        | Heating and cooling      |
| Power supply                                |                   | V-Hz, Ø                | 220-240-50, 1f           |
| Nett dimension                              | (W×D×H)           | mm                     | 490 × 918 × 325          |
| Gross dimension                             | (W×D×H)           | mm                     | 570 × 1055 × 415         |
| Net weight / Gross weight                   |                   | kg                     | 56 / 64                  |
| Electric heater                             | Power             | kW                     | 3,1                      |
|   | Power consumption | A                      | 13,5                     |
| Sound pressure level                        |                   | dB(A)                  | 32                       |
| Sound power level                           |                   | dB(A)                  | 44                       |
| Leaving water temperature                   | Space heating     | °C                     | 25-60                    |
|   | DHW (tank)        | °C                     | 35-55                    |
| Control cables: indoor unit to outdoor unit |                   | pcs. × mm <sup>2</sup> | 4 × 1,5 (shielded cable) |

# Technical specification outdoor unit

| Outdoor unit model   |  |   | H100Xm4 R15                                 |                  |
|--|--|---|---|------------------|
| EAN product code   |  |   | 5905567601675                               |                  |
| Power supply   |  | V-Hz, Ø   | 220-240-50, 1f                              |                  |
| Air-air  | Cooling  | Capacity  | kW  | 10,89            |
|  |  | Rated input   | kW  | 3,60             |
|  |  | EER   | W/W   | 3,01             |
|  | Heating  | Capacity  | kW  | 12,03            |
|  |  | Rated input   | kW  | 3,00             |
|  |  | COP   | W/W   | 3,71             |
|  | Seasonal cooling                               | Energy efficiency class                                       |   | A++              |
|  |  | Annual energy consumption                                     | kWh   | 608,00           |
|  |  | Design load in cooling mode                                   |   | 10,60            |
|  |  | SEER  |   | 6,10             |
|  | Seasonal heating                               | Energy efficiency class                                       |   | A+               |
|  |  | Annual energy consumption                                     | kWh/a                                       | 3150             |
| Design load in heating mode (T <sub>biv</sub> -7°C)                        |  | kW  | 9,00  |                  |
| SCOP <sup>(1)</sup>  |  |   | 4,00  |                  |
| Air-water  | Heating (A7/W35)                               | Capacity  | kW  | 8,00             |
|  |  | Rated input   | kW  | 1,80             |
|  |  | COP   |   | 4,40             |
|  | Heating (A7/W45)                               | Capacity  | kW  | 8,00             |
|  |  | Rated input   | kW  | 2,50             |
|  |  | COP   |   | 3,20             |
|  | Heating (A7/W55)                               | Capacity  | kW  | 8,00             |
|  |  | Rated input   | kW  | 2,60             |
|  |  | COP   |   | 3,10             |
|  | Seasonal energy efficiency LWT 35°C            | SCOP <sup>(1)</sup>   |   | 4,45             |
|  |  | Rated heat output   | kW  | 8,0              |
|  |  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %   | 175,12           |
|  |  | Annual energy consumption                                     | kWh   | 3712,00          |
|  |  | Seasonal space heating energy efficiency class <sup>(1)</sup> |   | A++              |
|  | Seasonal energy efficiency LWT 55°C            | SCOP <sup>(1)</sup>   |   | 2,99             |
|  |  | Rated heat output   | kW  | 8,0              |
|  |  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %   | 156,6            |
|  |  | Annual energy consumption                                     | kWh   | 5524             |
| Seasonal space heating energy efficiency class <sup>(1)</sup>              |  |   | A+  |                  |
| Minimum rated current of the overcurrent circuit breaker with breaker type |  | A   | B16   |                  |
| Minimal wire pcs and dimension of cords*                                   |  | il. × mm <sup>2</sup>   | 3 × 4,0                                     |                  |
| Control cables: indoor unit to outdoor unit                                |  | pcs. × mm <sup>2</sup>  | 4 × 1,5 (shielded cable)                    |                  |
| Compressor   | Type   |   | Rotary DC                                   |                  |
| Fan  | Type   |   | DC  |                  |
|  | Quantity                                       |   | 1   |                  |
| Refrigerant  | Type   |   | R32   |                  |
|  | GWP  |   | 675   |                  |
|  | Charged (up to 30 mb)                          | kg  | 2,1   |                  |
|  |  | TCO <sub>2</sub> eq   | 1,42  |                  |
| Pipe connections   | Liquid   | mm  | 4 × Ø6,35 / (4×1/4")                        |                  |
|  | Gas  | mm  | 3 × Ø9,52 + 1 × Ø12,7 (3 × 3/8" + 1 × 1/2") |                  |
|  | Minimum installation length                    | m   | 3   |                  |
|  | Maximum installation length                    | m   | 80  |                  |
|  | Additional amount of refrigerant for over 30 m | g/m   | 12  |                  |
| Maximum height difference  | Outdoor unit above the indoor unit             | m   | 10  |                  |
|  | Outdoor unit below the indoor unit             | m   | 15  |                  |
| Power cables: outdoor unit   |  | pcs. × mm <sup>2</sup>  | 3 × 4,0                                     |                  |
| Spacing brackets   |  | (W×D)   | (mm)  | 673 × 403        |
| Sound pressure level   |  | dB(A)   | 63  |                  |
| Sound power level  |  | dB(A)   | 68  |                  |
| Nett weight  |  | (W×D×H)   | mm  | 946 × 410 × 810  |
| Gross weight   |  | (W×D×H)   | mm  | 1090 × 500 × 865 |
| Net weight / Gross weight  |  | kg  | 68,8 / 75,6                                 |                  |
| Operating outdoor temperature  | Air-to-air                                     | Cooling   | °C  | -15-50           |
|  |  | Heating   | °C  | -20-24           |
|  | Air-to-water                                   | Heating   | °C  | -20-24           |
|  |  | Domestic hot water  | °C  | -20-43           |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>Δn</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20 mb. If this value is exceeded, an electrical designer should be consulted.

# WE ARE FUTURE

94

*WINDMI*  
S E R I E S

Monoblock

**Rotenso Windmi Series**

---





## Windmi Series useful features

---

New Rotenso Windmil Monoblock heat pumps are comfortable in daily use due to an intuitive icon-based controller and 4 programmable dry contacts.



### Parental lock

Function blocking the controller in order to secure against unwanted interference of the third parties.



### Vacation mode & Eco mode

Vacation mode and eco mode for improved user experience



### Disinfection

Heating water in the system to 70°C contributes to the effective elimination of Legionella bacteria.



**Programmable  
Dry Contact**

You can program up to four buttons to perform certain actions such as pump start or forced switch to fast DHW heating mode.



**Fast DHW  
heating mode**

Forces the system into DHW mode for immediate hot water preparation.



**Connects to  
PV systems**

In response to excessive electricity generation signal the heat pump can be set to store electric energy in the form of hot water.



## Dedicated **controller**

Controller features:


- Touchscreen controller
- Integrated Wi-Fi module
- LCD display
- Configurable daily schedules
- Configurable weekly schedules
- Out-of-home vacation mode
- Eco mode
- Screen lock
- Parental lock
- Audible alarm
- Integrated temperature sensor
- Adjustable water temperature
- Adjustable air temperature
- Climate curves.



**ORIS** heat pump controller  
for Rotenso Windmi system

# All in the app

You can use your tablet or smartphone with TUYA SMART app to control the Rotenso Windmi Monoblock unit no matter where you are.

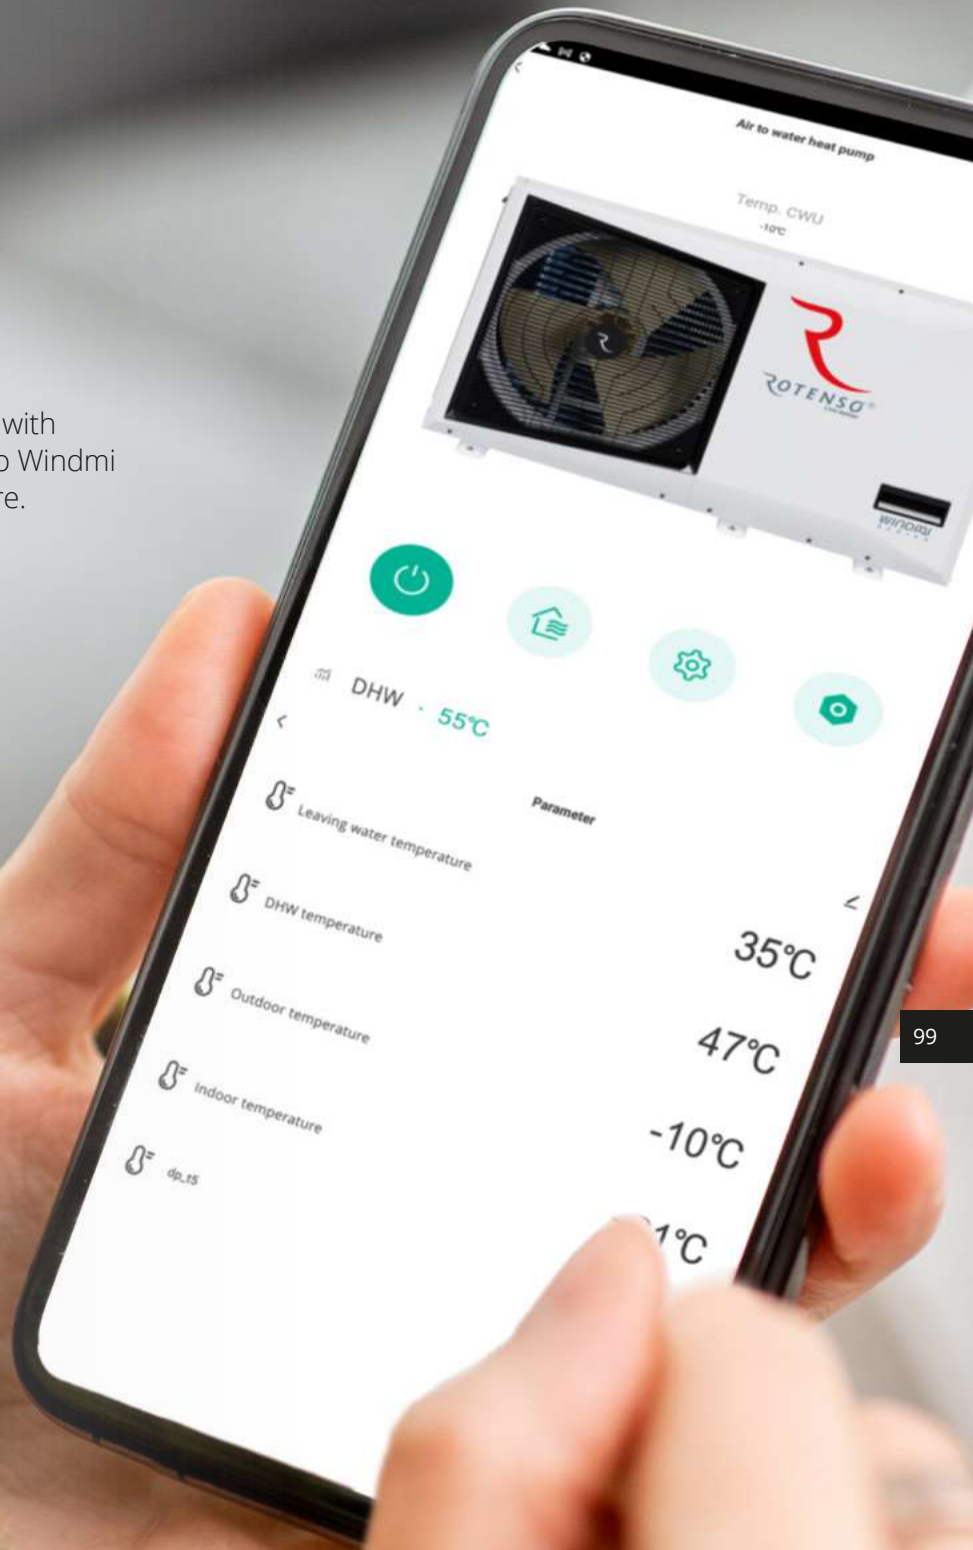


Powered by



Intelligence  
Inside


# Unit dimensions

## WINDMI SERIES

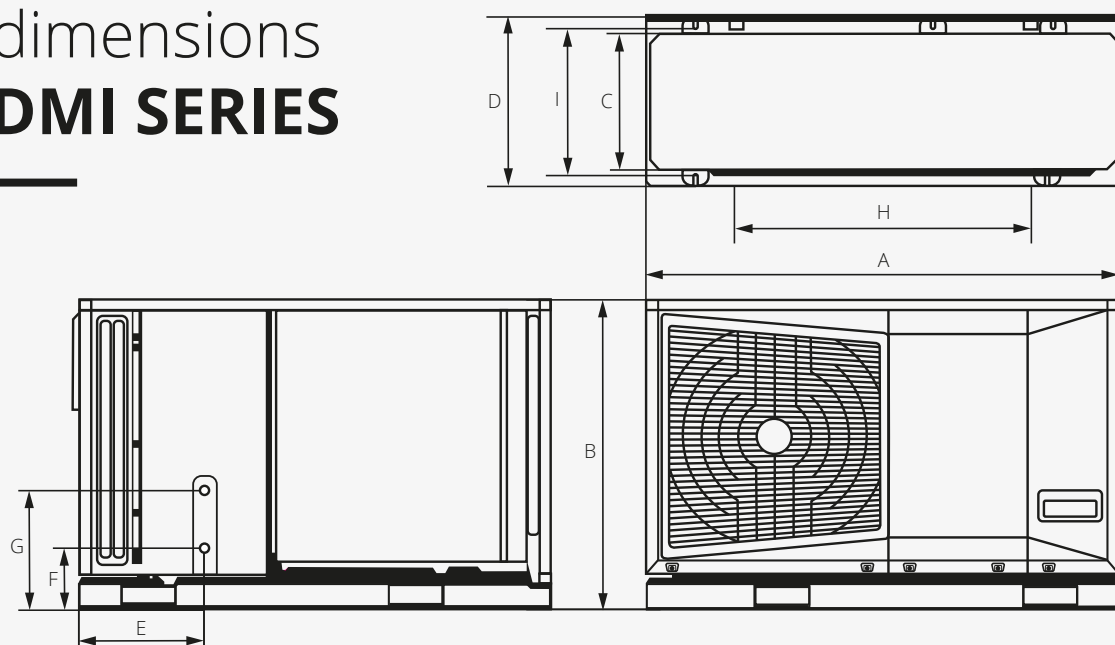

### Rotenso Windmi Monoblock outdoor unit 6/8/10 kW

| Model    | Power | Net dimensions (WxDxH) [mm] | Bracket spacing (W1xD) [mm] | A    | B   | C   | D   | E   | F   | G   | H   | I   | Net weight [kg] |
|----------|-------|-----------------------------|-----------------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----------------|
| WIM60X1  | 6 kW  | 1335 × 475 × 875            | 836 × 445                   | 1335 | 875 | 410 | 475 | 353 | 170 | 334 | 836 | 445 | 109             |
| WIM80X1  | 8 kW  | 1335 × 475 × 875            | 836 × 445                   | 1335 | 875 | 410 | 475 | 353 | 170 | 334 | 836 | 445 | 120             |
| WIM100X1 | 10 kW | 1335 × 475 × 875            | 836 × 445                   | 1335 | 875 | 410 | 475 | 353 | 170 | 334 | 836 | 445 | 126             |

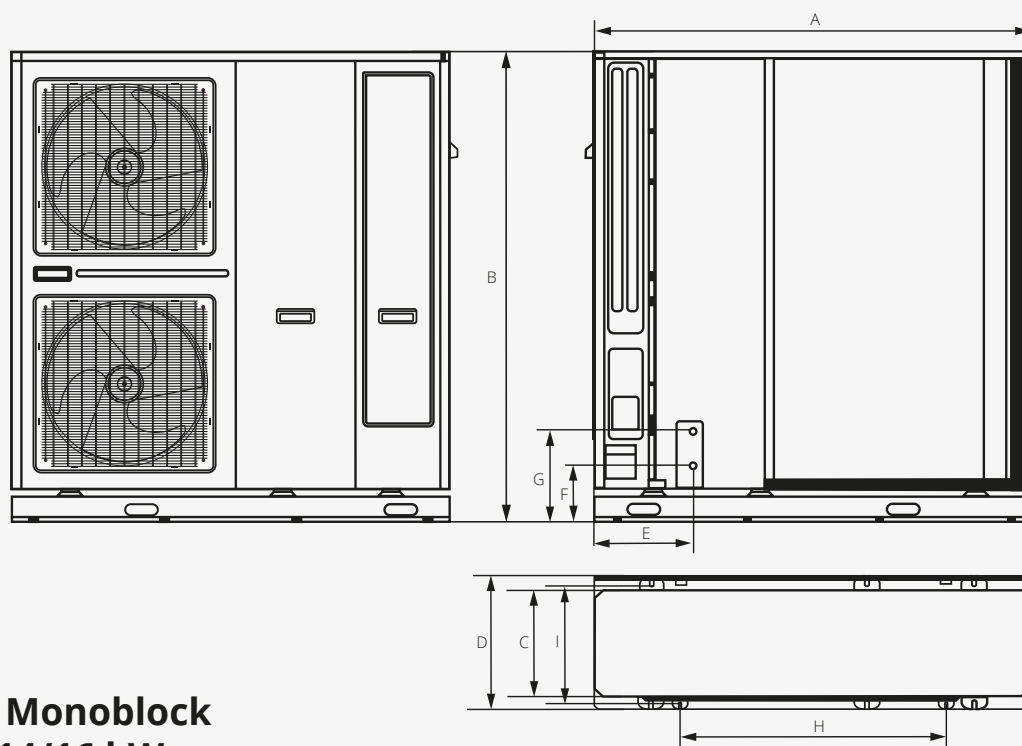

### Rotenso Windmi Monoblock outdoor unit 12/14/16 kW

| Model    | Power | Net dimensions (WxDxH) [mm] | Bracket spacing (W1xD) [mm] | A    | B    | C   | D   | E   | F   | G   | H   | I   | Net weight [kg] |
|----------|-------|-----------------------------|-----------------------------|------|------|-----|-----|-----|-----|-----|-----|-----|-----------------|
| WIM120X3 | 12 kW | 1302 × 465 × 1517           | 784 × 428                   | 1302 | 1517 | 370 | 465 | 289 | 201 | 332 | 784 | 428 | 180,9           |
| WIM140X3 | 14 kW | 1302 × 465 × 1517           | 784 × 428                   | 1302 | 1517 | 370 | 465 | 289 | 201 | 332 | 784 | 428 | 182,9           |
| WIM160X3 | 16 kW | 1302 × 465 × 1517           | 784 × 428                   | 1302 | 1517 | 370 | 465 | 289 | 201 | 332 | 784 | 428 | 182,9           |

# Solutions

## WINDMI SERIES

---



**Rotenso Windmi** is a brand new series of energy-efficient single- and double-fan monoblock heat pumps with capacities ranging from 6 to 16 kW.



# Solutions

## WINDMI MONOBLOCK



Rotenso Windmi Monoblock is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing. This type of solution makes it easier and faster to install the heat pump, and requires no additional space for the hydronic module inside the building.

Heat pump double door housing is designed to provide an easy access to all its components, while operating parameters can be quickly modified and monitored in real time from the user interface. The state-of-the-art design and technology used in the Rotenso Windmi Series solutions ensures high efficiency at low temperatures. Modern architecture enthusiasts will love the simple design of these single- and double-fan units suitable for buildings with both high and low demand for heating power.






6-10 kW



12-16 kW



| Model          | Rotenso Windmi Monoblock |   |    |    |    |    |
|----------------|--------------------------|---|----|----|----|----|
| Capacity (kW)  | 6                        | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f | •                        | • | •  |    |    |    |
| 380-420~50, 3f |                          |   |    | •  | •  | •  |



## Windmi Series **Monoblock**

---

**Rotenso Windmi is a brand new series of energy-efficient single- and double-fan monoblock heat pumps with capacities ranging from 6 to 16 kW.**

Both refrigeration and hydronic modules are enclosed in a single, compact heat pump housing designed for outdoor installation.

This type of solution is recommended for small buildings with no separate room to install an indoor unit.

TUYA SMART, a popular app for smart home asset management which allows to control the heat pump remotely, contributes to a major user experience improvement.

There are also 4 programmable dry contacts to customize controls according to personal preferences to further facilitate the daily use of the unit.

Intuitive, icon-based controller and 4 programmable dry contact buttons to customize controls according to user preferences make the solution even more convenient. Simple, geometric design of the devices will please the modern architecture enthusiasts.



# WINDMI MONO BLOCK



Operating range  
down to -25°C



Supply water  
temperature  
of 62°C



Programmable  
Dry Contact



Temperature  
sensor  
integrated with  
touchscreen  
controller



Integrated Wi-Fi  
module



Control via  
mobile app





## Supply water temperature of 62°C

If the heat pump is used to heat spaces where radiators are installed, temperature of the supply water in the system must be higher. Rotenso Windmi heat pump can heat water up to 62°C.



### Temperature sensor integrated with touchscreen controller

A temperature sensor with a touchscreen controller allows for real-time, precise control of the temperature inside the room.



### Integrated Wi-Fi module

The Rotenso Windmi Monoblock pump can be controlled both by the wired controller and the TUYA SMART mobile app, whether you are staying at home or not.



## Programmable Dry Contact

---


Customize up to four buttons. Create independent contacts to start the heat pump, force it into quick DHW heating mode or perform other actions, as needed.

107



### Operating range down to -25°C

Heat pumps are prepared for efficient operation even at extreme outdoor temperatures as low as -25°C. During the cold winter, they guarantee that supply water for central heating and domestic hot water are heated sufficiently.


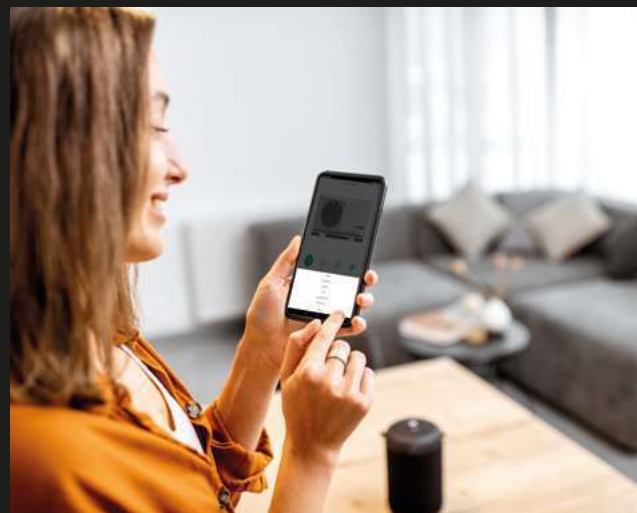


### Control via mobile app

You can use your tablet or smartphone to control the Rotenso Windmi Monoblock unit no matter where you are.

# Windmi Monoblock

6-16 kW

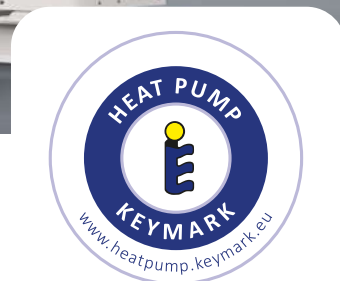

## Device features

108



Environmentally friendly refrigerant R32



Efficient heating



Energy efficiency class at 35°C A+++



Energy efficiency class at 55°C A++



Maximum COP 4,75 <sup>(1)</sup>



Operating range down to -25°C



Supply water temperature of 62°C



Programmable Dry Contact



Twin rotary compressor



Integrated electric heater



Outdoor unit drip tray heater



Compressor crankcase heater



Easy installation and maintenance



WiFi module in wired controller



Daily operation schedule



Configurable weekly schedules



Vacation mode



Integrated temperature sensor



Weather operating modes (climate curve)



Dedicated application



Disinfection



Maximum leaving water temperature of 62°C (in DHW mode)



Modbus Protocol

1. Refers to units WIM40X1 and WIM120X3

# Technical specification

| Outdoor model  |   |                       | WIM60X1                            | WIM80X1                    | WIM100X1          | WIM120X3          | WIM140X3          | WIM160X3          |                |
|--|---|-----------------------|------------------------------------|----------------------------|-------------------|-------------------|-------------------|-------------------|----------------|
| EAN product code   |   |                       | 5905567602276                      | 5905567602283              | 5905567602290     | 5905567602306     | 5905567602313     | 5905567602320     |                |
| Power supply   |   | V-Hz, Ø               | 220-240-50, 1f                     | 220-240-50, 1f             | 220-240-50, 1f    | 380-420-50, 3f    | 380-420-50, 3f    | 380-420-50, 3f    |                |
| Heating (A7/W35)   | Capacity  | kW                    | 6,00                               | 8,00                       | 10,00             | 12,00             | 14,00             | 16,00             |                |
|  | Rated input   | kW                    | 1,35                               | 1,70                       | 2,25              | 2,53              | 3,01              | 3,48              |                |
|  | COP   |                       | 4,45                               | 4,70                       | 4,45              | 4,75              | 4,65              | 4,60              |                |
| Heating (A7/W45)   | Capacity  | kW                    | 6,00                               | 8,00                       | 10,00             | 12,00             | 14,00             | 16,00             |                |
|  | Rated input   | kW                    | 1,74                               | 2,22                       | 2,86              | 3,38              | 3,94              | 4,57              |                |
|  | COP   |                       | 3,45                               | 3,60                       | 3,50              | 3,55              | 3,55              | 3,50              |                |
| Heating (A7/W55)   | Capacity  | kW                    | 5,80                               | 7,70                       | 9,50              | 11,50             | 12,00             | 13,50             |                |
|  | Rated input   | kW                    | 2,15                               | 2,70                       | 3,54              | 4,04              | 4,36              | 5,00              |                |
|  | COP   |                       | 2,70                               | 2,85                       | 2,68              | 2,85              | 2,75              | 2,70              |                |
| Cooling (A35/W18)  | Capacity  | kW                    | 5,50                               | 7,00                       | 9,00              | 11,00             | 13,50             | 14,50             |                |
|  | Rated input   | kW                    | 1,38                               | 1,75                       | 2,25              | 2,75              | 3,46              | 3,82              |                |
|  | EER   |                       | 4,00                               | 4,00                       | 4,00              | 4,00              | 3,90              | 3,80              |                |
| Cooling (A35/W7)   | Capacity  | kW                    | 5,00                               | 6,50                       | 8,00              | 10,50             | 12,00             | 14,00             |                |
|  | Rated input   | kW                    | 1,82                               | 2,24                       | 2,67              | 3,82              | 4,44              | 5,28              |                |
|  | EER   |                       | 2,75                               | 2,90                       | 3,00              | 2,75              | 2,7               | 2,65              |                |
| Seasonal energy efficiency LWT at 35°C                                     | SCOP <sup>(1)</sup>   |                       | 4,75                               | 4,90                       | 4,98              | 4,91              | 4,94              | 4,78              |                |
|  | Rated heat output   | kW                    | 6,05                               | 8,09                       | 9,73              | 11,94             | 14,03             | 14,79             |                |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                     | 187                                | 193                        | 196               | 193               | 195               | 188               |                |
|  | Annual energy consumption                                     | kWh                   | 2583                               | 3335                       | 3980              | 4983              | 5789              | 6392              |                |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                       | A+++                               | A+++                       | A+++              | A+++              | A+++              | A+++              |                |
| Seasonal energy efficiency LWT at 55°C                                     | SCOP <sup>(1)</sup>   |                       | 3,25                               | 3,36                       | 3,41              | 3,39              | 3,42              | 3,36              |                |
|  | Rated heat output   | kW                    | 5,59                               | 7,61                       | 9,09              | 11,96             | 11,99             | 13,06             |                |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                     | 127                                | 131                        | 134               | 133               | 134               | 131               |                |
|  | Annual energy consumption                                     | kWh                   | 3480                               | 4590                       | 5378              | 7222              | 7204              | 7948              |                |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                       | A+                                 | A+                         | A+                | A+                | A+                | A+                |                |
| SEER   | LWT at 7°C  |                       | 4,51                               | 4,79                       | 4,89              | 5,04              | 5,05              | 5,06              |                |
|  | LWT at 18°C   |                       | 6,39                               | 6,80                       | 6,25              | 6,60              | 6,37              | 6,14              |                |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   | A                     | B32                                | B40                        | B40               | B25               | B25               | B32               |                |
| Compressor   |   | Type                  | Twin rotary inverter compressor DC |                            |                   |                   |                   |                   |                |
| Fan  |   | Type                  | Brushless DC motor / BLDC          |                            |                   |                   |                   |                   |                |
| Fan  |   | Quantity              | 1                                  | 1                          | 1                 | 2                 | 2                 | 2                 |                |
| Refrigerant  | Type  |                       | R32                                | R32                        | R32               | R32               | R32               | R32               |                |
|  | GWP   |                       | 675                                | 675                        | 675               | 675               | 675               | 675               |                |
|  | Quantity  | kg                    | 1,1                                | 1,6                        | 1,8               | 2,2               | 2,6               | 2,6               |                |
| Minimal wire pcs and dimension of cords*                                   |   | pcs × mm <sup>2</sup> | 3 × 6                              | 3 × 10                     | 3 × 10            | 5 × 4             | 5 × 4             | 5 × 6             |                |
| Bracket spacing  |   | W1 × D                | mm                                 | 836 × 445                  | 836 × 445         | 836 × 445         | 784 × 428         | 784 × 428         |                |
| Sound pressure level   |   |                       | dB(A)                              | 53                         | 54                | 55                | 56                | 58                |                |
| Sound power level  |   |                       | dB(A)                              | 64                         | 65                | 66                | 69                | 70                |                |
| Net dimensions   |   | W × D × H             | mm                                 | 1335 × 475 × 875           | 1335 × 475 × 875  | 1335 × 475 × 875  | 1302 × 465 × 1517 | 1302 × 465 × 1517 |                |
| Gross dimensions   |   | W × D × H             | mm                                 | 1420 × 535 × 1045          | 1420 × 535 × 1045 | 1420 × 535 × 1045 | 1364 × 518 × 1690 | 1364 × 518 × 1690 |                |
| Net weight / Gross weight  |   | kg                    | 109 / 125                          | 120 / 135,5                | 126 / 142,1       | 180,9 / 200,9     | 182,9 / 202,9     | 182,9 / 202,9     |                |
| Operating outdoor temperature  | Cooling / Heating   | °C                    | -5-50 / -25-43                     | -5-50 / -25-43             | -5-50 / -25-43    | -5-50 / -25-43    | -5-50 / -25-43    | -5-50 / -25-43    |                |
|  | DHW   | °C                    | -25-43                             | -25-43                     | -25-43            | -25-43            | -25-43            | -25-43            |                |
| Operation modes  |   |                       | Heating and cooling                |                            |                   |                   |                   |                   |                |
| Leaving water temperature  | Space cooling   | °C                    | 5-25                               | 5-25                       | 5-25              | 5-25              | 5-25              | 5-25              |                |
|  | Space heating   | °C                    | 25-62                              | 25-62                      | 25-62             | 25-62             | 25-62             | 25-62             |                |
|  | DHW (tank)  | °C                    | 40-62                              | 40-62                      | 40-62             | 40-62             | 40-62             | 40-62             |                |
| Electric heater  | Power supply  | V-Hz, Ø               | 220-240-50, 1f                     | 220-240-50, 1f             | 220-240-50, 1f    | 380-420-50, 3f    | 380-420-50, 3f    | 380-420-50, 3f    |                |
|  | Number of heating stages                                      | pcs                   | 1                                  | 1                          | 1                 | 3                 | 3                 | 3                 |                |
|  | Power   | kW                    | 3                                  | 3                          | 3                 | 9                 | 9                 | 9                 |                |
|  | Maximum operating current                                     | A                     | 13,6                               | 13,6                       | 13,6              | 13,6              | 13,6              | 13,6              |                |
| Water circuit  | Water connections   |                       | mm(inch)                           | Ø25,4 (1")                 | Ø25,4 (1")        | Ø25,4 (1")        | Ø31,75 (1,25")    | Ø31,75 (1,25")    | Ø31,75 (1,25") |
|  | Pressure relief valve   |                       | MPa                                | 0,6                        | 0,6               | 0,6               | 0,6               | 0,6               | 0,6            |
|  | Condensate drain  |                       | mm                                 | 20                         | 20                | 20                | 20                | 20                | 20             |
|  | Expansion tank  | Total volume          | l                                  | 5                          | 5                 | 5                 | 5                 | 5                 | 5              |
|  |   | Actual volume         | l                                  | 5                          | 5                 | 5                 | 5                 | 5                 | 5              |
|  |   | Maximum pressure      | MPa                                | 1                          | 1                 | 1                 | 1                 | 1                 | 1              |
|  |   | Initial pressure      | MPa                                | 0,15                       | 0,15              | 0,15              | 0,15              | 0,15              | 0,15           |
|  | Heat exchanger  | Type                  |                                    | PHE / plate heat exchanger |                   |                   |                   |                   |                |
|  |   | Minimum flow          | l/min                              | 6                          | 6                 | 6                 | 12                | 12                | 12             |
|  | Water pump head   |                       | m                                  | 9                          | 9                 | 9                 | 9                 | 9                 | 9              |
| Water pump type  |   |                       | DC                                 | DC                         | DC                | DC                | DC                | DC                |                |
| Total water volume   |   | l                     | 0,62                               | 1,08                       | 1,08              | 1,45              | 1,45              | 1,45              |                |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>Δn</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# WE ARE FUTURE


110

*HEATMI*  
SERIES

Split  
**Rotenso Heatmi Series**

---



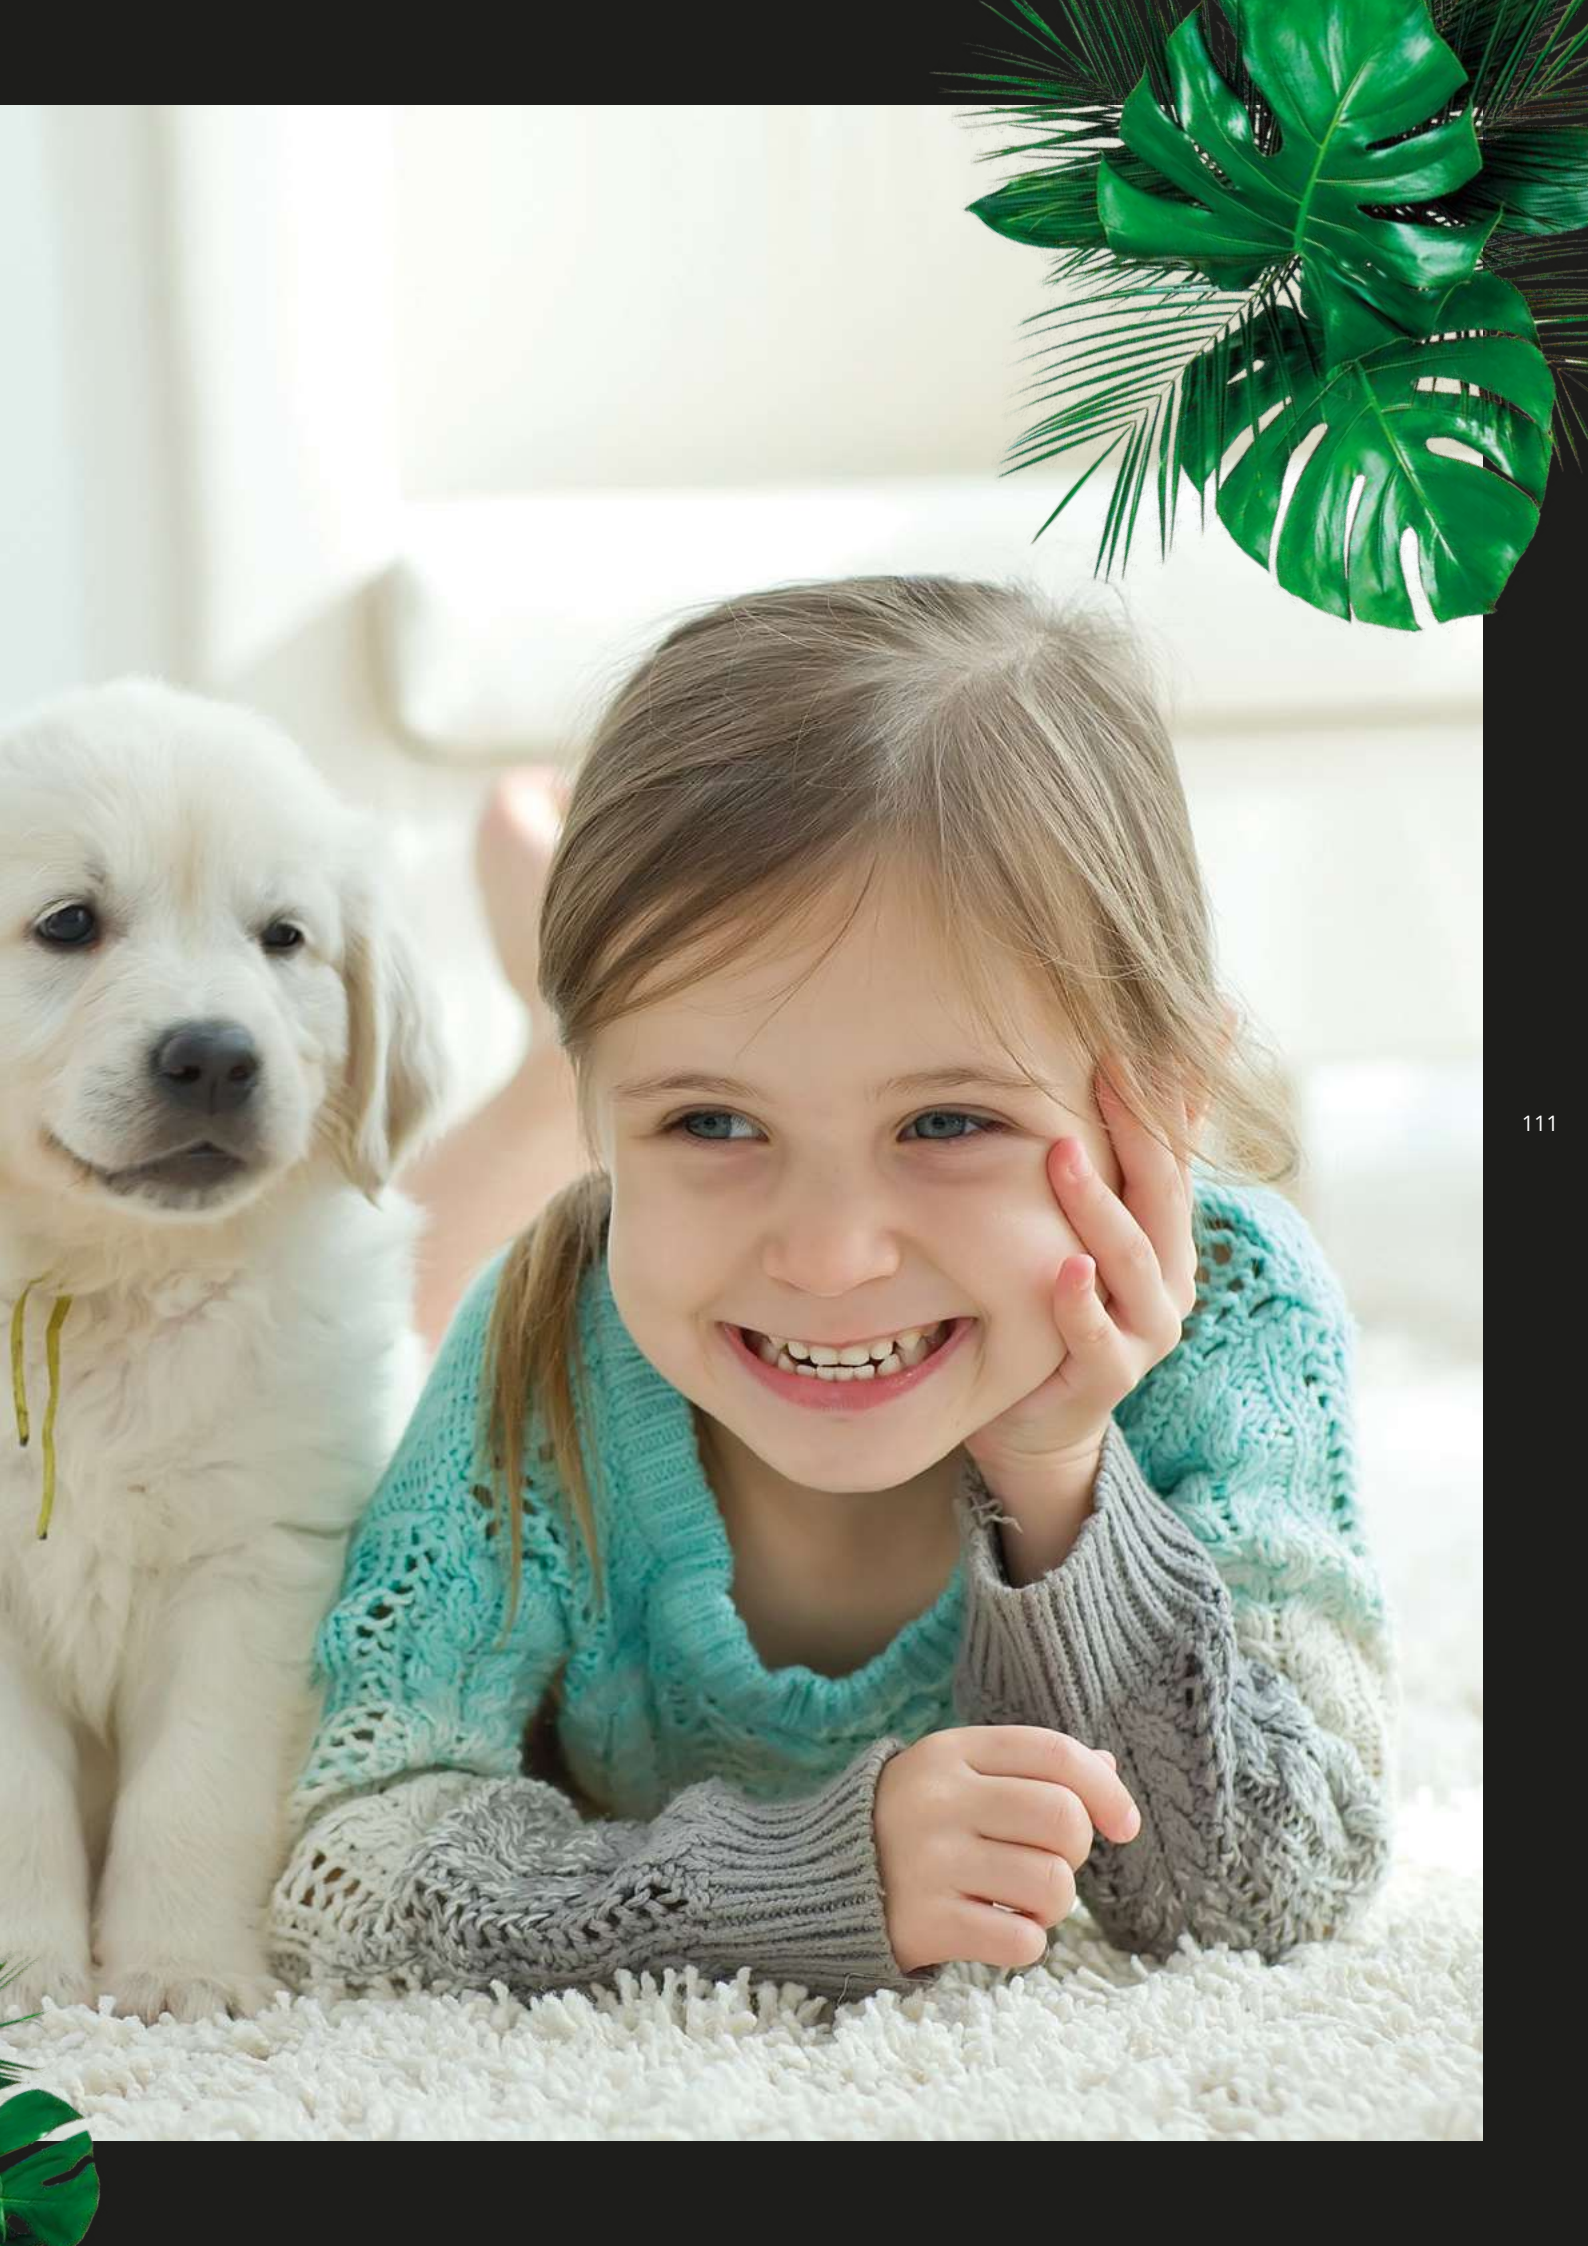

# Heatmi Series useful features

Rotenso Heatmi air-to-water split-type heat pumps are energy-efficient and maintenance-free heat source. Remote control via a mobile app and a number of useful features ensure user comfort.

112



## Combination of operation modes

4 basic operation modes (cooling, heating, DHW, auto) and additional 3 combined operation modes to meet different user requirements.



## Disinfection

Heating water in the system to 70°C contributes to the effective elimination of Legionella bacteria.



## ECO mode

Mode to reduce consumption of electric energy.



**Fast DHW heating mode**

Forces the system into DHW mode for immediate hot water preparation.



**DHW circulation pump control**

Keeps hot water circulating in the system according to a preset timer.



**Smart Grid functionality**

The heat pump controller is designed to work with the „Smart Grid“.



**ATEA** heat pump controller  
in the Rotenso Heatmi 4-10 kW



## Controller and sensor **with colour display for Heatmi 4-10 kW**

### You can use the controller to:

- Check the heat pump operation status and mode
- Set temperature and operation mode
- Easily activate: vacation mode, home vacation mode, eco mode
- Set up schedule and timer
- Activate second temperature control zone
- Monitor system status
- Set the heating curve
- Display error codes
- Set language for messages
- Check operating parameters
- Set audible alarm

The controller with an integrated temperature sensor can act as an indoor thermostat.



High supply temperature zone, e.g. radiator heating.



Low supply temperature zone, e.g. underfloor heating.




Domestic hot water heating mode



# App controlled

## Use the application to:

- Set up operation schedule
- Monitor system status
- Check heat pump status and operation mode
- Activate second temperature control zone
- Set temperature and operation mode

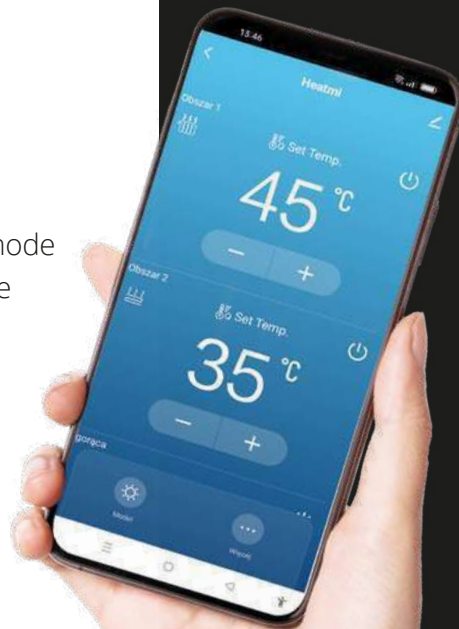


Powered by



Intelligence  
Inside

# Unit dimensions


## HEATMI SERIES

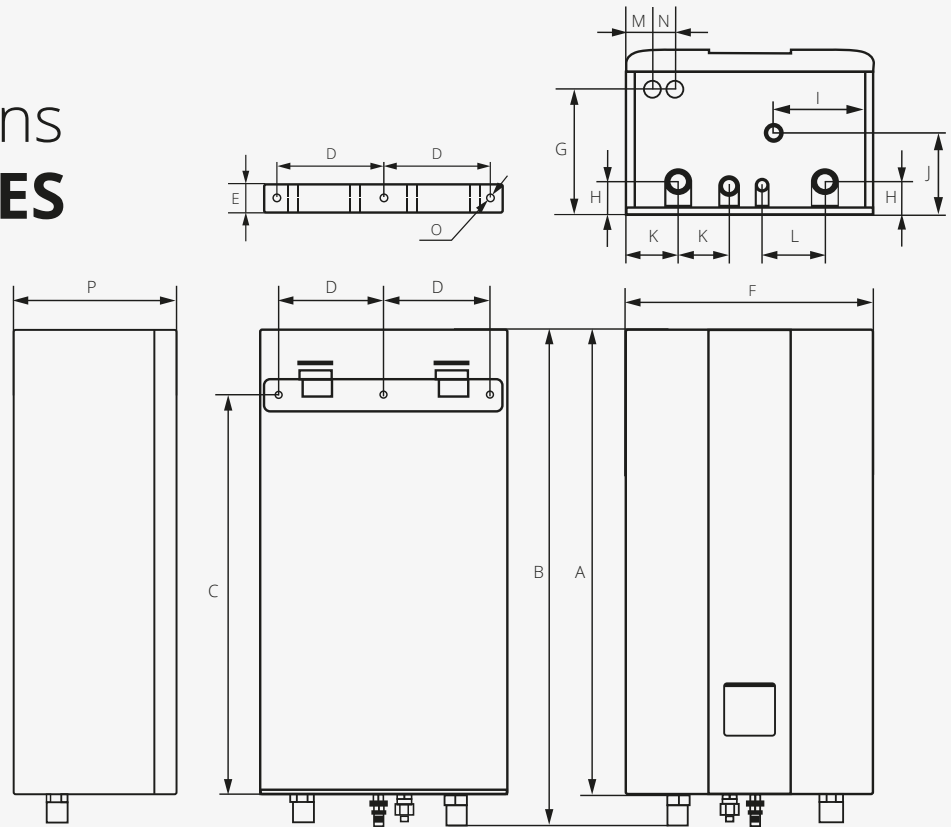

### Rotenso Heatmi Split indoor unit 6/8/10/12/14/16 kW

116

| Model      | Power | Net dimensions (W×D×H) [mm] | A   | B   | C     | D   | E  | F   | G   | H  | I   | J   | K  | L   | M  | N  | O       | P   | Net weight [kg] |
|------------|-------|-----------------------------|-----|-----|-------|-----|----|-----|-----|----|-----|-----|----|-----|----|----|---------|-----|-----------------|
| HES60X1i   | 6 kW  | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 38,5            |
| HES80X13i  | 8 kW  | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 39,5            |
| HES100X13i | 10 kW | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 39,5            |
| HES120X13i | 12 kW | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 43              |
| HES140X13i | 14 kW | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 43              |
| HES160X13i | 16 kW | 420 × 270 × 790             | 790 | 844 | 694,4 | 180 | 50 | 420 | 211 | 54 | 170 | 136 | 88 | 109 | 45 | 38 | 3 × Ø12 | 270 | 43              |

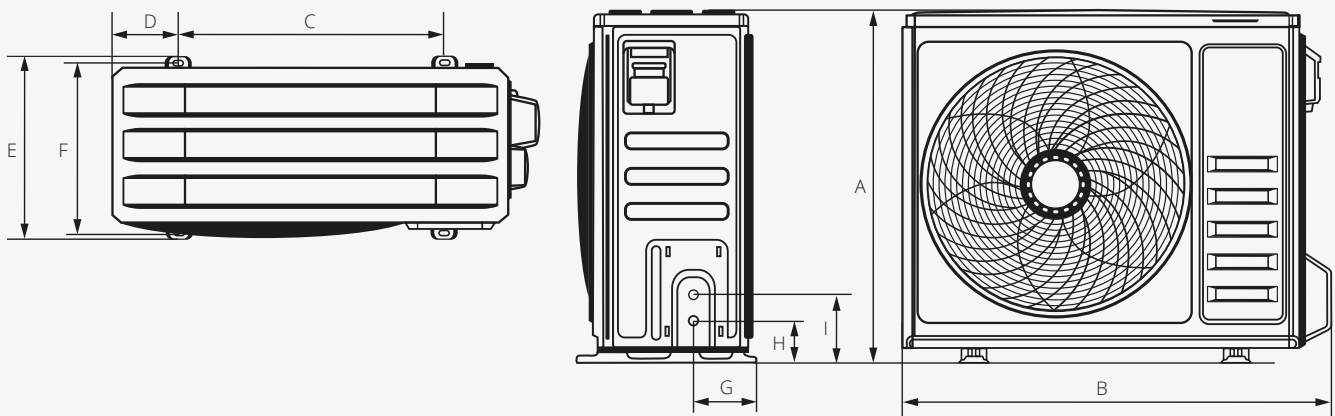


### Rotenso Heatmi Split outdoor unit 4/6/8/10/12/14/16 kW

| Model     | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W1xD) [mm] | A   | B    | C   | D   | E   | F   | G   | H  | I   | Net weight [kg] |
|-----------|-------|-----------------------------|-----------------------------|-----|------|-----|-----|-----|-----|-----|----|-----|-----------------|
| HES40X1o  | 4 kW  | 993 × 421 × 804             | 607 × 390                   | 804 | 977  | 607 | 154 | 421 | 390 | 155 | 95 | 156 | 59,5            |
| HES60X1o  | 6 kW  | 993 × 421 × 804             | 607 × 390                   | 804 | 977  | 607 | 154 | 421 | 390 | 155 | 95 | 156 | 59,5            |
| HES80X1o  | 8 kW  | 993 × 421 × 804             | 607 × 390                   | 804 | 977  | 607 | 154 | 421 | 390 | 155 | 95 | 156 | 59,5            |
| HES100X1o | 10 kW | 993 × 421 × 804             | 607 × 390                   | 804 | 977  | 607 | 154 | 421 | 390 | 155 | 95 | 156 | 59,5            |
| HES120X1o | 12 kW | 1010 × 410 × 850            | 660 × 462                   | 850 | 1079 | 660 | 176 | 494 | 410 | 192 | 94 | 155 | 90              |
| HES140X1o | 14 kW | 1010 × 410 × 850            | 660 × 462                   | 850 | 1079 | 660 | 176 | 494 | 410 | 192 | 94 | 155 | 90              |
| HES160X1o | 16 kW | 1010 × 410 × 850            | 660 × 462                   | 850 | 1079 | 660 | 176 | 494 | 410 | 192 | 94 | 155 | 90              |

# Solutions

## HEATMI SERIES

---

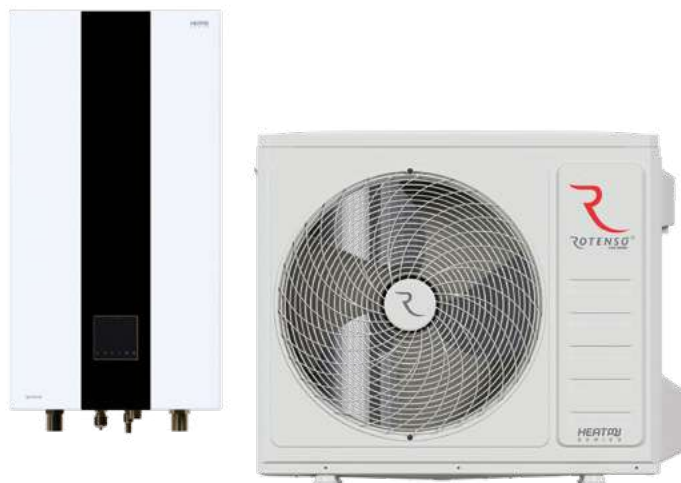

### Rotenso Heatmi Split

consists of an outdoor unit (condenser) and a hydronic module (for indoor installation).

HEATMI  
SERIES



# Solution

## HEATMI SPLIT

---




Rotenso HEATMI air-to-water split-type heat pump consists of a hydronic module, i.e. a hydrobox for indoor installation, and an outdoor unit, i.e. a condenser. The advantage of such a solution is that the indoor hydrobox can be easily accessed.


Moreover, in split heat pumps, the refrigeration connection between the hydrobox and the outdoor unit, is extremely resistant to freezing, even during prolonged power outages. High quality components and advanced technology guarantee many years of cost-efficient and trouble-free operation.

### Standard equipment:

1. Indoor unit
2. Outdoor unit
3. Wired controller
4. DHW tank sensor
5. Plate heat exchanger
6. Flow meter
7. Diaphragm vessel
8. Pressure gauge
9. Circulation pump
10. Pressure relief valve
11. Purge valve
12. Y water filter


118

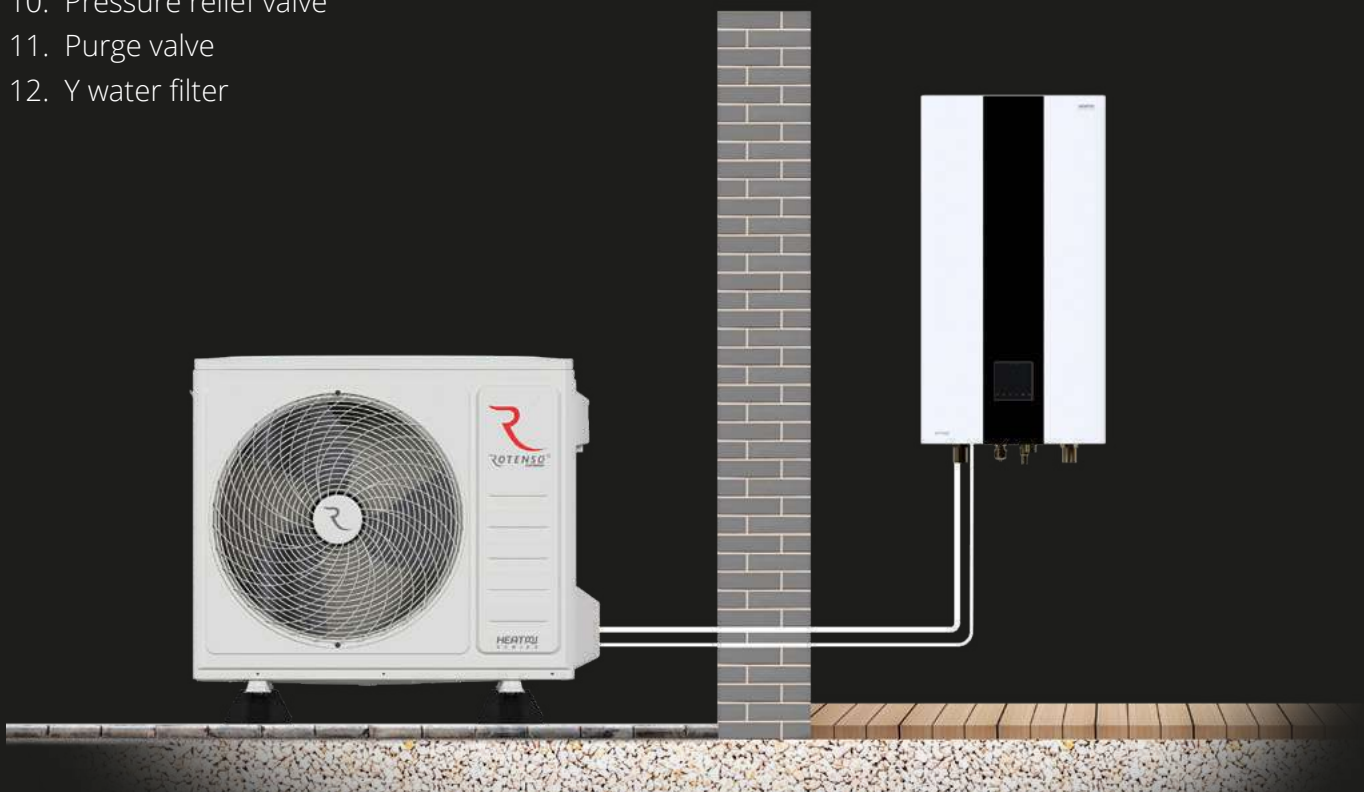

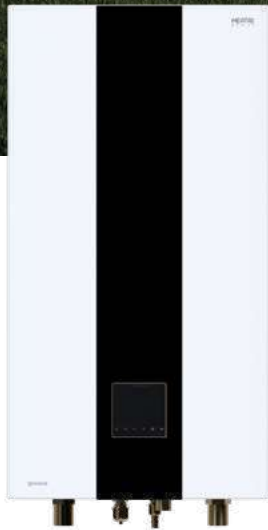


Indoor unit Hydrobox

HES60X1i, HES80X13i, HES100X13i,

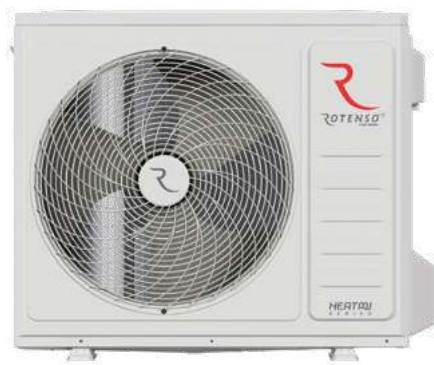

4-10 kW



| Model          | Rotenso Heatmi Split |   |   |    |
|----------------|----------------------|---|---|----|
| Capacity (kW)  | 4                    | 6 | 8 | 10 |
| 220-240~50, 1f | •                    | • | • | •  |



## Heatmi Series

# Split

---

**Rotenso Heatmi Split heat pump consists of an outdoor unit and a sleek, compact hydronic module (hydrobox) for indoor installation. The highest energy efficiency class A+++ combined with excellent capacity at extremely low outdoor temperatures ensure cost-effective and reliable operation of this ecological heat source.**

Prepared for operation at extremely low outdoor temperatures of down to  $-25^{\circ}\text{C}$ , Rotenso Heatmi heat pumps supply central heating systems (including conventional radiators) with water up to  $65^{\circ}\text{C}$ .

The **COP** of **5.20\*** means that the amount of heating energy produced by the Rotenso Heatmi heat pumps is more than five times the amount of the consumed electric energy.

Increased energy efficiency combined with unique fan blade design and twin rotary DC compressor ensure the Rotenso Heatmi's high efficiency with minimal noise – only 35 dB(A) (in silent mode).

The heat pump can be controlled by a wired controller or a TUYA SMART mobile app to make its daily use even more comfortable.



# HEATMI SPLIT



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Compact  
SLIM housing



Controller with  
colour display  
and integrated  
temperature sensor



Integrated Wi-Fi  
module



Control via  
mobile app

121



Compact and stylish, the two-colour indoor unit with a black controller and a vivid display will appeal to those looking for solutions suitable for modern interiors.

\* COP 5.20 for HES40X1o





## Integrated temperature sensor


Elegant controller with a colour display will make your daily use of the heat pump easier.

122




## Supply water temperature of max. 65°C

If the heat pump is used to heat spaces where radiators are installed the temperature of the supply water in the system must be higher. Rotenso Heatmi heat pumps can heat water up to 65°C.

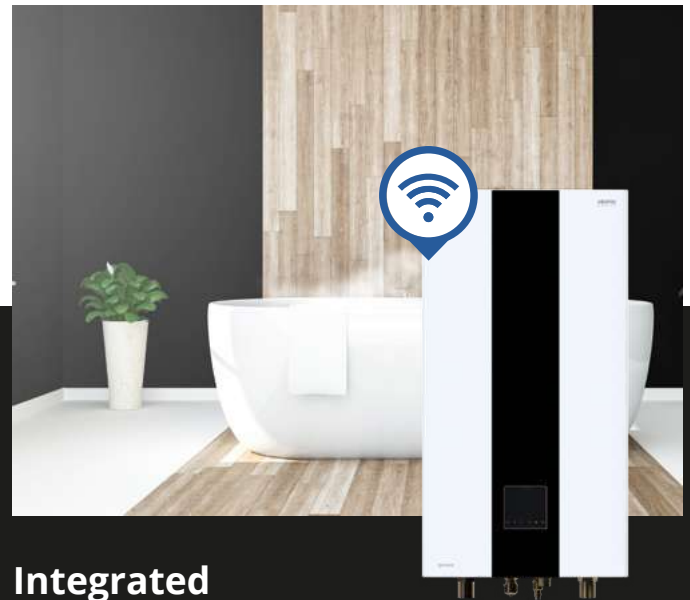

## Integrated Wi-Fi module


The Rotenso Heatmi Split heat pump can be controlled both by the wired controller and the TUYA SMART mobile app, whether you are staying at home or not.

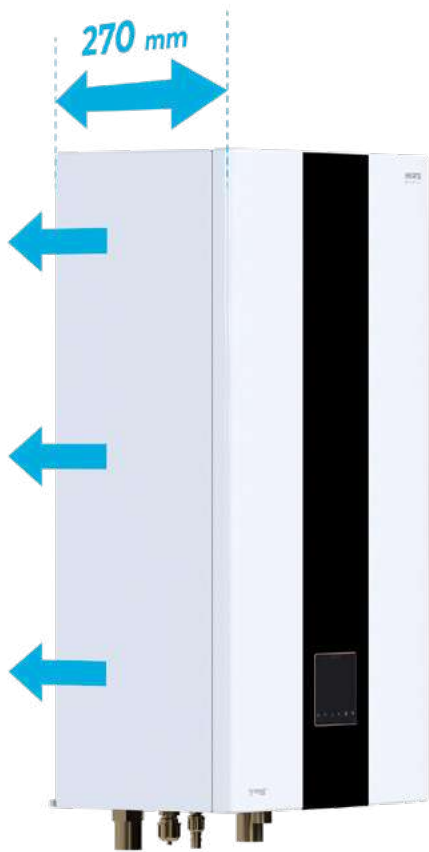

## Compact **SLIM housing**

Rotenso heat pump design is a response to the individual needs of investors, owners of large and small buildings, as well as changing standards in residential construction industry.

The smallest indoor unit on the market with a depth of just 270 mm.

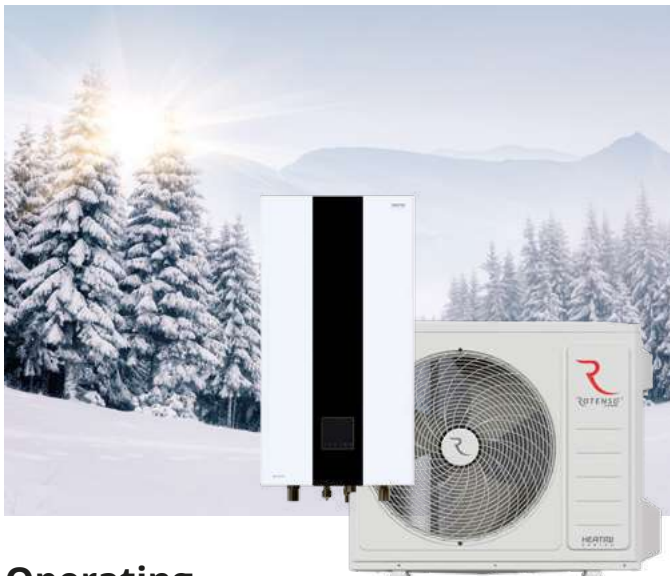

### **Operating range down to -25°C**

The pump is prepared to operate efficiently even at extreme outdoor temperatures down to -25°C. During the cold winter, it guarantees that supply water for central heating and domestic hot water is heated sufficiently




### **Control via mobile app**

You can use your tablet or smartphone to control the Rotenso Heatmi Split unit no matter where you are.

# Heatmi Split

4-10 kW



## Device features

124

|  |                            |                                      |                                     |  |   |                                     |                                       |
|--|----------------------------|--------------------------------------|-------------------------------------|--|---|-------------------------------------|---------------------------------------|
|  |                            |                                      |                                     |  |   |                                     |                                       |
| Environmentally friendly refrigerant R32 | Efficient heating          | Energy efficiency class at 35°C A+++ | Energy efficiency class at 55°C A++ | Maximum COP 5,20 <sup>(1)</sup>          | Operating range down to -25°C                           | Supply water temperature of 65°C    | Smart Grid functionality              |
|  |                            |                                      |                                     |  |   |                                     |                                       |
| Twin rotary compressor                   | Integrated electric heater | Outdoor unit drip tray heater        | Compressor crankcase heater         | Indoor unit drip tray                    | Easy installation and maintenance                       | Compact indoor split unit housing   | Maximum installation length up to 30m |
|  |                            |                                      |                                     |  |   |                                     |                                       |
| Silent mode                              | Integrated Wi-Fi module    | Daily operation schedule             | Configurable weekly schedules       | Vacation mode                            | Menu in English   | Multilanguage menu                  | Integrated temperature sensor         |
|  |                            |                                      |                                     |  |   |                                     |                                       |
| Weather operating modes (climate curve)  | 2 heating control zones    | Dedicated application                | Disinfection                        | DHW circulation pump operation schedules | Maximum leaving water temperature of 60°C (in DHW mode) | Prepared to create a cascade system | Modbus Protocol                       |

1. Refers to unit HES40X1o.

# Technical specification

| Indoor unit model  |   |                       |                                    | HES60X1i                         | HES80X13i                        | HES100X13i       |           |
|--|---|-----------------------|------------------------------------|----------------------------------|----------------------------------|------------------|-----------|
| SKU  | EAN   | 5905567602375         |                                    | 5905567602382                    | 5905567602399                    |                  |           |
| Compatible outdoor unit model  |   | HES40X1o / HES60X1o   |                                    | HES80X1o                         | HES100X1o                        |                  |           |
| Operation modes  |   | Heating and cooling   |                                    | Heating and cooling              | Heating and cooling              |                  |           |
| Leaving water temperature  | Space cooling   | °C                    | 5-25                               | 5-25                             | 5-25                             |                  |           |
|  | Space heating   | °C                    | 25-65                              | 25-65                            | 25-65                            |                  |           |
|  | DHW (tank)  | °C                    | 30-60                              | 30-60                            | 30-60                            |                  |           |
| Power supply   |   | V-Hz, Ø               | 220-240-50, 1f                     | 220-240-50, 1f<br>380-420-50, 3f | 220-240-50, 1f<br>380-420-50, 3f |                  |           |
| Rated input  |   | W                     | 3100                               | 9100                             | 9100                             |                  |           |
| Operating current  |   | A                     | 13,1                               | 13,1                             | 13,1                             |                  |           |
| Sound power level  |   | dB(A)                 | 42                                 | 42                               | 42                               |                  |           |
| Electric heater  | Power supply  | V-Hz, Ø               | 220-240-50, 1f                     | 380-420-50, 3f                   | 380-420-50, 3f                   |                  |           |
|  | Number of heating stages                                      | pcs                   | 1                                  | 3                                | 3                                |                  |           |
|  | Power   | kW                    | 3                                  | 9                                | 9                                |                  |           |
|  | Maximum operating current                                     | A                     | 13,4                               | 13,3                             | 13,3                             |                  |           |
| Net dimensions   |   | W x D x H             | mm                                 | 420 x 270 x 790                  | 420 x 270 x 790                  |                  |           |
| Gross dimensions   |   | W x D x H             | mm                                 | 530 x 355 x 1035                 | 530 x 355 x 1035                 |                  |           |
| Net weight / Gross weight  |   | kg                    | 38,5 / 43,5                        | 39,5 / 44,5                      | 39,5 / 44,5                      |                  |           |
| Water circuit  | Water connections   |                       | inch                               | R1"                              | R1"                              | R1"              |           |
|  | Pressure relief valve   |                       | MPa                                | 0,3                              | 0,3                              | 0,3              |           |
|  | Condensate drain  |                       | mm                                 | Ø25                              | Ø25                              | Ø25              |           |
|  | Expansion tank  | Total volume          |                                    | l                                | 8                                | 8                | 8         |
|  |   | Actual volume         |                                    | l                                | 2,4                              | 2,4              | 2,4       |
|  |   | Maximum pressure      |                                    | MPa                              | 0,3                              | 0,3              | 0,3       |
|  |   | Initial pressure      |                                    | MPa                              | 0,1                              | 0,1              | 0,1       |
|  | Heat exchanger  |                       | Type                               | PHE / plate heat exchanger       |                                  |                  |           |
|  | Water pump head   |                       | l/min                              | 14,2                             | 14,2                             | 14,2             |           |
|  | Water pump type   |                       | m                                  | 9                                | 9                                | 9                |           |
| Refrigerant circuit  |   | Liquid / Gas          | DC inverter                        | DC inverter                      | DC inverter                      |                  |           |
| Minimal wire pcs and dimension of cords*                                   |   | pcs x mm <sup>2</sup> | Ø9,52 / Ø15,9                      | Ø9,52 / Ø15,9                    | Ø9,52 / Ø15,9                    |                  |           |
| Control cables: indoor unit to outdoor unit                                |   | pcs x mm <sup>2</sup> | 3 x 2,5                            | 5 x 2,5                          | 5 x 2,5                          |                  |           |
|  |   |                       | 2 x 0,75 (shielded cable)          |                                  |                                  |                  |           |
| Outdoor unit model   |   |                       |                                    | HES40X1o                         | HES60X1o                         | HES80X1o         | HES100X1o |
| Power supply   | EAN   | 5905567602337         |                                    | 5905567602344                    | 5905567602351                    | 5905567602368    |           |
| Compatible indoor unit model   |   | HES60X1i              |                                    | HES60X1i                         | HES80X13i                        | HES100X13i       |           |
| Power supply   |   | V-Hz, Ø               | 220-240-50, 1f                     | 220-240-50, 1f                   | 220-240-50, 1f                   | 220-240-50, 1f   |           |
| Heating (A7/W35)   | Capacity  | kW                    | 4,31                               | 6,27                             | 8,00                             | 9,50             |           |
|  | Rated input   | kW                    | 0,82                               | 1,24                             | 1,60                             | 1,98             |           |
|  | COP   |                       | 5,20                               | 5,01                             | 5,00                             | 4,80             |           |
| Heating (A7/W45)   | Capacity  | kW                    | 4,35                               | 6,35                             | 8,00                             | 9,50             |           |
|  | Rated input   | kW                    | 1,14                               | 1,65                             | 2,11                             | 2,60             |           |
|  | COP   |                       | 3,80                               | 3,75                             | 3,80                             | 3,65             |           |
| Heating (A7/W55)   | Capacity  | kW                    | 4,47                               | 6,15                             | 7,40                             | 9,00             |           |
|  | Rated input   | kW                    | 1,49                               | 2,00                             | 2,38                             | 3,00             |           |
|  | COP   |                       | 2,95                               | 3,00                             | 3,11                             | 3,00             |           |
| Cooling (A35/W18)  | Capacity  | kW                    | 4,53                               | 6,71                             | 8,00                             | 9,50             |           |
|  | Rated input   | kW                    | 0,81                               | 1,34                             | 1,67                             | 2,07             |           |
|  | EER   |                       | 5,55                               | 4,90                             | 4,80                             | 4,60             |           |
| Cooling (A35/W7)   | Capacity  | kW                    | 4,68                               | 7,13                             | 7,00                             | 8,00             |           |
|  | Rated input   | kW                    | 1,36                               | 2,33                             | 2,14                             | 2,53             |           |
|  | EER   |                       | 3,45                               | 3,00                             | 3,27                             | 3,16             |           |
| Seasonal energy efficiency LWT at 35°C                                     | SCOP <sup>(1)</sup>   |                       | 4,85                               | 4,95                             | 4,90                             | 4,87             |           |
|  | Rated heat output   | kW                    | 5,5                                | 6,8                              | 8,0                              | 9,0              |           |
|  | Seasonal energy efficiency ratio (ηS)                         | %                     | 189                                | 194,8                            | 192,7                            | 191,7            |           |
|  | Annual energy consumption                                     | kWh                   | 2368                               | 2841                             | 3404                             | 3791             |           |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                       | A+++                               | A+++                             | A+++                             | A+++             |           |
| Seasonal energy efficiency LWT at 55°C                                     | SCOP <sup>(1)</sup>   |                       | 3,31                               | 3,52                             | 3,44                             | 3,41             |           |
|  | Rated heat output   | kW                    | 4,30                               | 5,60                             | 7,00                             | 8,00             |           |
|  | Seasonal energy efficiency ratio (ηS)                         | %                     | 129,4                              | 138,5                            | 135,6                            | 133,4            |           |
|  | Annual energy consumption                                     | kWh                   | 2684                               | 3270                             | 4205                             | 4895             |           |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                       | A++                                | A++                              | A++                              | A++              |           |
| SEER   | LWT at 7°C  |                       | 4,74                               | 5,07                             | 5,54                             | 5,68             |           |
|  | LWT at 18°C   |                       | 7,38                               | 7,80                             | 8,50                             | 8,34             |           |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   | A                     | B16                                | B16                              | B20                              | B20              |           |
| Compressor   |   | Type                  | Twin rotary inverter compressor DC |                                  |                                  |                  |           |
| Fan  |   | Type                  | Brushless DC motor / BLDC          |                                  |                                  |                  |           |
|  |   | Quantity              | 1                                  | 1                                | 1                                | 1                |           |
| Refrigerant  | Type  |                       | R32                                | R32                              | R32                              | R32              |           |
|  | GWP   |                       | 675                                | 675                              | 675                              | 675              |           |
|  | Quantity  |                       | kg                                 | 1,65                             | 1,65                             | 1,65             |           |
|  |   |                       | TCO <sub>eq</sub>                  | 1,11                             | 1,11                             | 1,11             |           |
| Pipe connections   | Liquid / Gas  |                       | mm                                 | Ø9,52 / Ø15,9                    | Ø9,52 / Ø15,9                    | Ø9,52 / Ø15,9    |           |
|  | Minimum installation length                                   |                       | m                                  | 2                                | 2                                | 2                |           |
|  | Maximum installation length                                   |                       | m                                  | 30                               | 30                               | 30               |           |
|  | Additional amount of refrigerant for over 15 linear meters    |                       | g/m                                | 38 (L-15)                        | 38 (L-15)                        | 38 (L-15)        |           |
| Maximum height difference  | Outdoor unit above the indoor unit                            |                       | m                                  | 20                               | 20                               | 20               |           |
|  | Outdoor unit below the indoor unit                            |                       | m                                  | 20                               | 20                               | 20               |           |
| Minimal wire pcs and dimension of cords*                                   |   | pcs x mm <sup>2</sup> | 3 x 2,5                            | 3 x 2,5                          | 3 x 2,5                          | 3 x 2,5          |           |
| Control cables: indoor unit to outdoor unit                                |   | pcs x mm <sup>2</sup> | 2 x 0,75 (shielded cable)          |                                  |                                  |                  |           |
| Bracket spacing  |   | W1 x D                | mm                                 | 607 x 390                        | 607 x 390                        | 607 x 390        |           |
| Sound pressure level   |   | dB(A)                 | 44                                 | 45                               | 47                               | 50               |           |
| Sound power level  |   | dB(A)                 | 56                                 | 58                               | 60                               | 61               |           |
| Net dimensions   |   | W x D x H             | mm                                 | 993 x 421 x 804                  | 993 x 421 x 804                  | 993 x 421 x 804  |           |
| Gross dimensions   |   | W x D x H             | mm                                 | 1022 x 480 x 835                 | 1022 x 480 x 835                 | 1022 x 480 x 835 |           |
| Net weight / Gross weight  |   | kg                    | 59,5 / 63                          | 59,5 / 63                        | 59,5 / 63                        | 59,5 / 63        |           |
| Operating outdoor temperature  | Cooling / Heating   |                       | °C                                 | -5-43 / -25-35                   | -5-43 / -25-35                   | -5-43 / -25-35   |           |
|  | CWU   |                       | °C                                 | -25-43                           | -25-43                           | -25-43           |           |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature  
The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55, ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>Δn</sub>: 30mA  
\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# WE ARE FUTURE


126

*AIRMI*  
SERIES

Split, Monoblock  
**Rotenso Airmi Series**

---



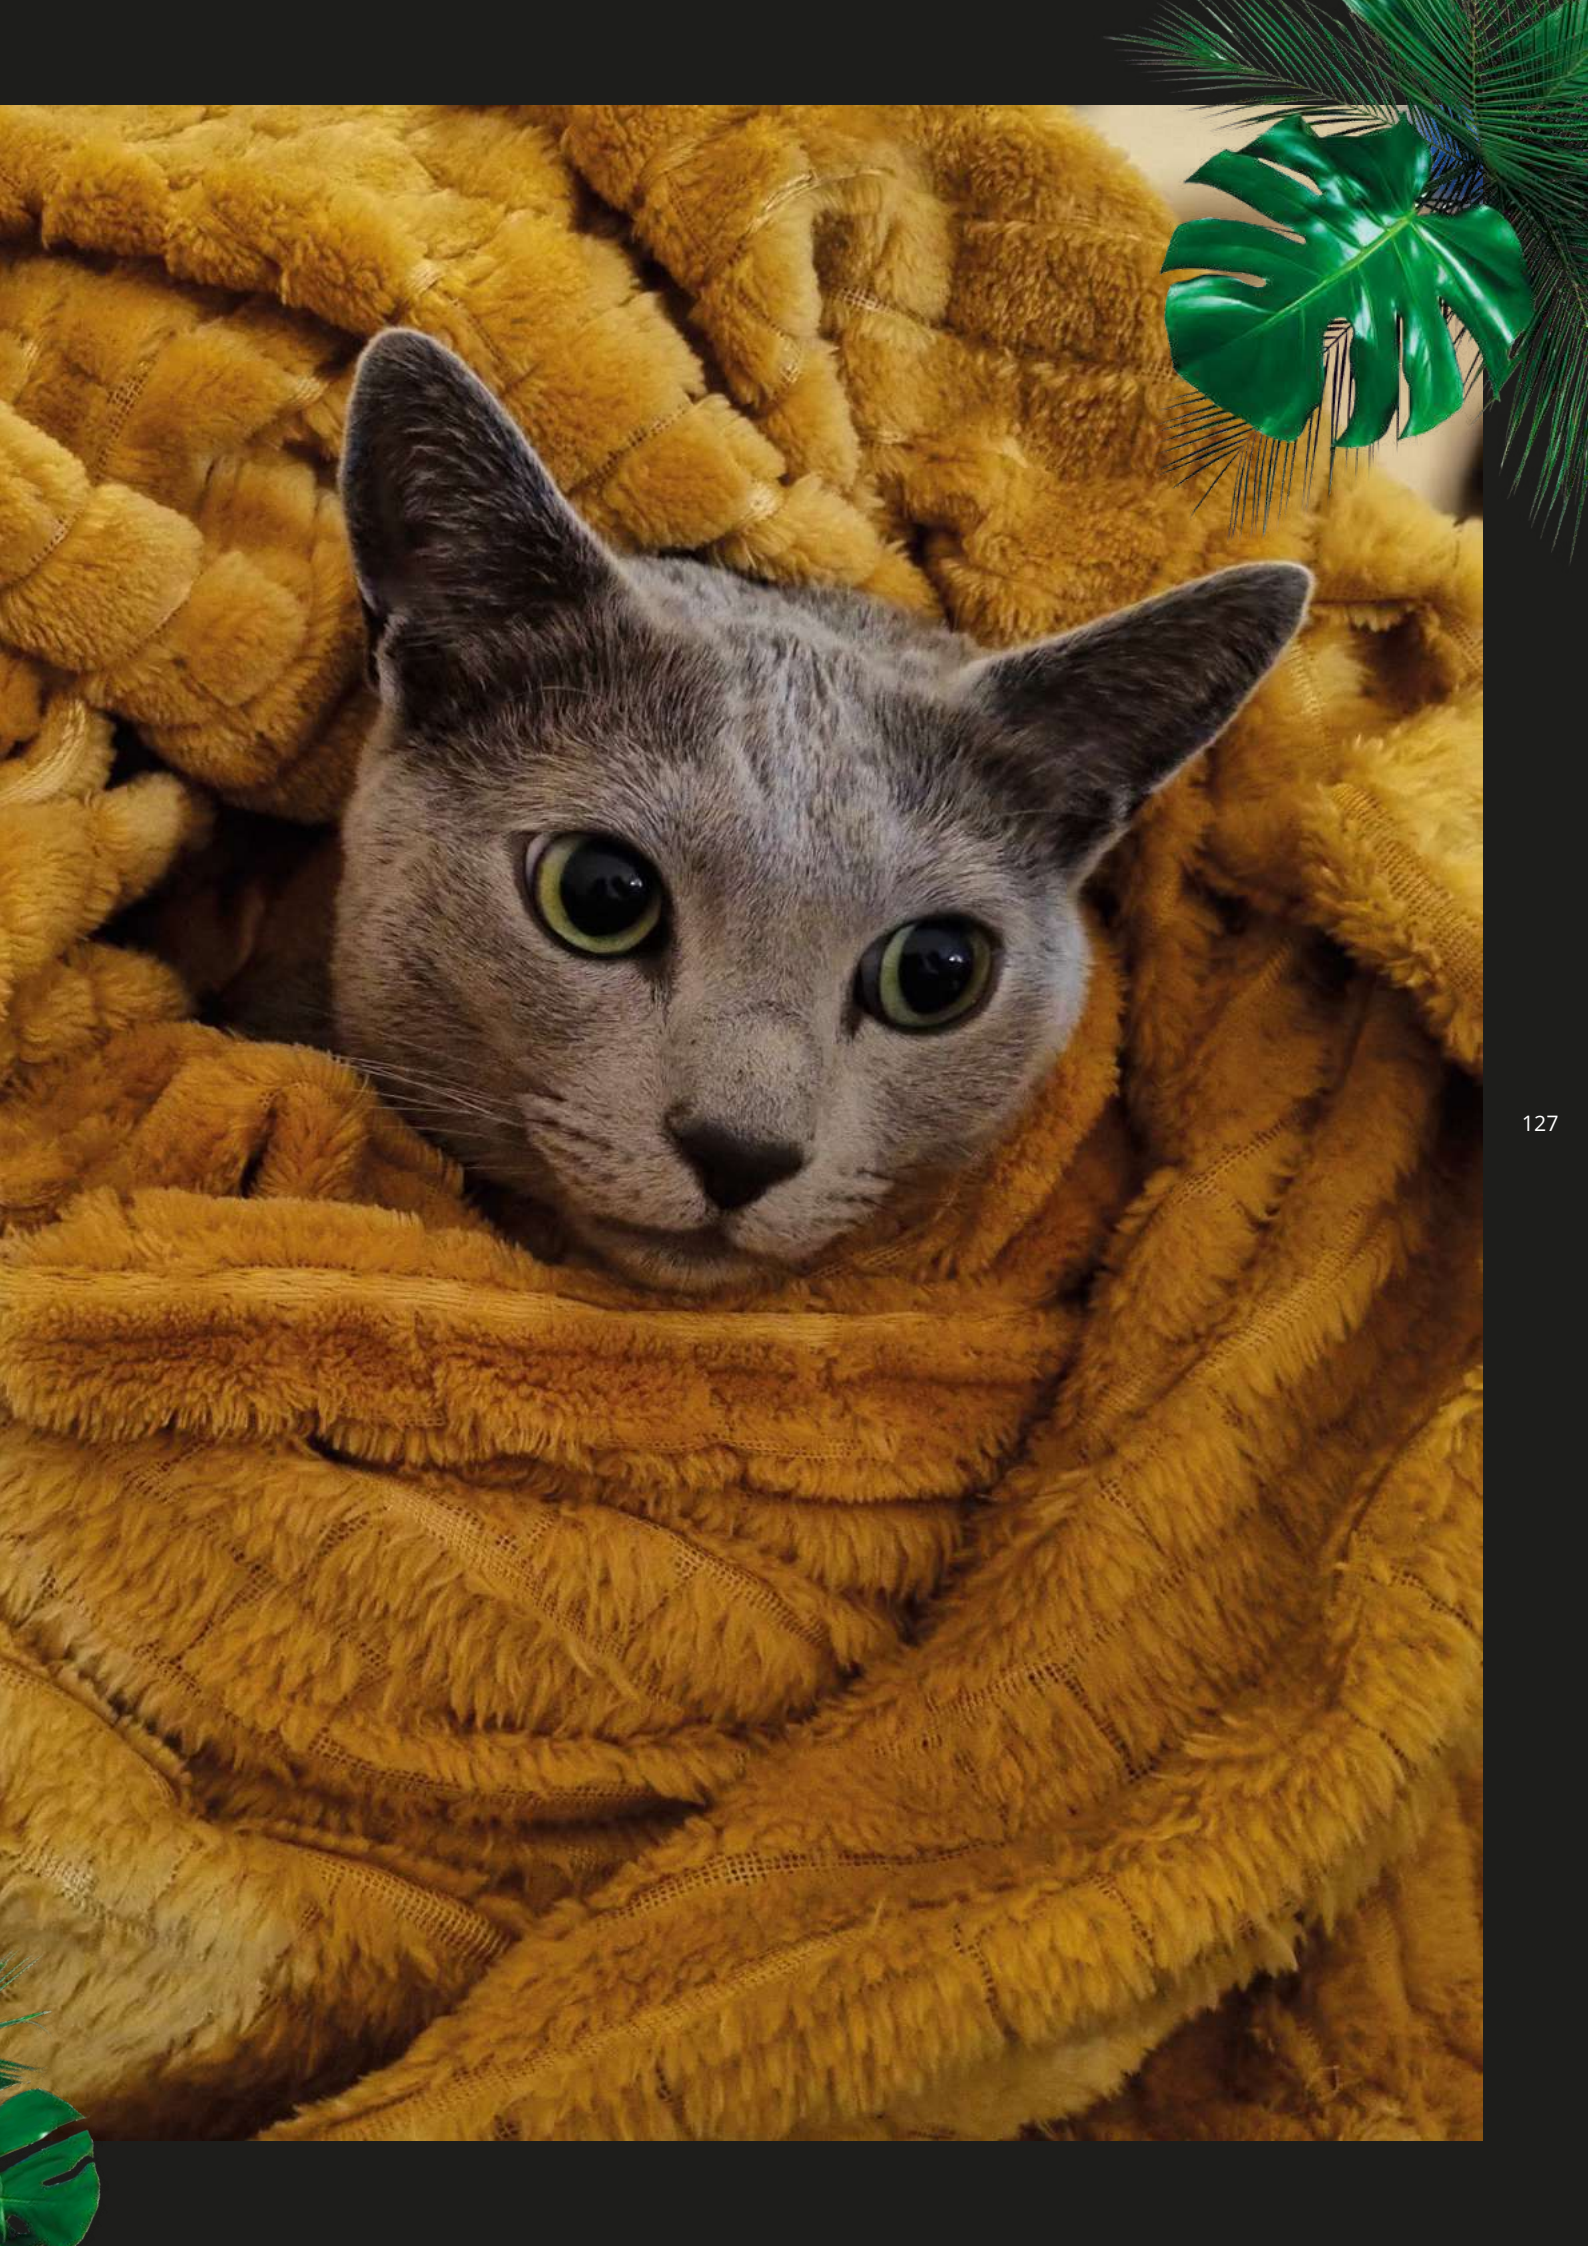



## Airmi Series useful features

Rotenso Airmi split and monoblock heat pumps are all about freedom of choice. Among these environmentally friendly, maintenance-free and cost-effective air-to-water heat pumps, you can easily find a unit that suits your individual aesthetic sense.



### Modern design

The simple design perfectly fits into modern architectural designs.



### Outdoor unit in 3 colours

Choose from 3 colours of outdoor units: grey, graphite and white.



### Intuitive controller

Compact controller typically integrated with temperature sensor and Wi-Fi module is a powerful tool to control the heat pump operation.



### 32 climate curves

Weather compensation for smooth and almost instant adjustment of heat pump operation to changing outdoor conditions.



### Dual control

Use the controller to define and control two separate heating zones.



### Disinfection

Heating water in the system to 70°C contributes to the effective elimination of Legionella bacteria.



## Matching housing colour

Opt for Rotenso heat pumps to enjoy environmentally friendly and energy-efficient heat source. Choose Airmi Series to select the most appropriate condenser colour to match your facade. Powder-coated in white, grey and graphite, the condenser housings feature a modern, simple design.

130



## Match heat pump colour to your facade at the stage of designing

We know how important the style of the house and landscaping are to our customers, so we made sure to offer you a range of colours to choose from.

Off-white, grey, graphite – these colours match the current trends in construction industry dominated by simple forms combined with natural materials, such as facade wood, stone stoneware or clinker bricks in natural shades.





**TERO** heat pump controller  
for the Rotenso Airmi system

## Dedicated **TERO** controller

### **You can use the controller to:**

- Check the heat pump operation status and operation mode
- Set temperature and operation mode
- Easily activate: silent mode, vacation mode, home vacation mode, eco mode
- Set up schedule and timer
- Activate second temperature control zone
- Monitor system status
- Control the device remotely
- Set the heating curve
- Display error codes
- Set language for messages
- Check operating parameters
- Set audible alarm

The controller with an integrated temperature sensor can act as an indoor thermostat.


# Additional app control

---

You can use your tablet or smartphone with TUYA SMART app to control the Rotenso Airmi Split and Monoblock unit no matter where you are.

Use the application to:

- Set up unit operation mode
- Set up operating temperature for specific heating zone
- Activate silent mode
- Set up operation schedule
- Track system state
- View heat pump operation key parameters
- Display possible unit errors.

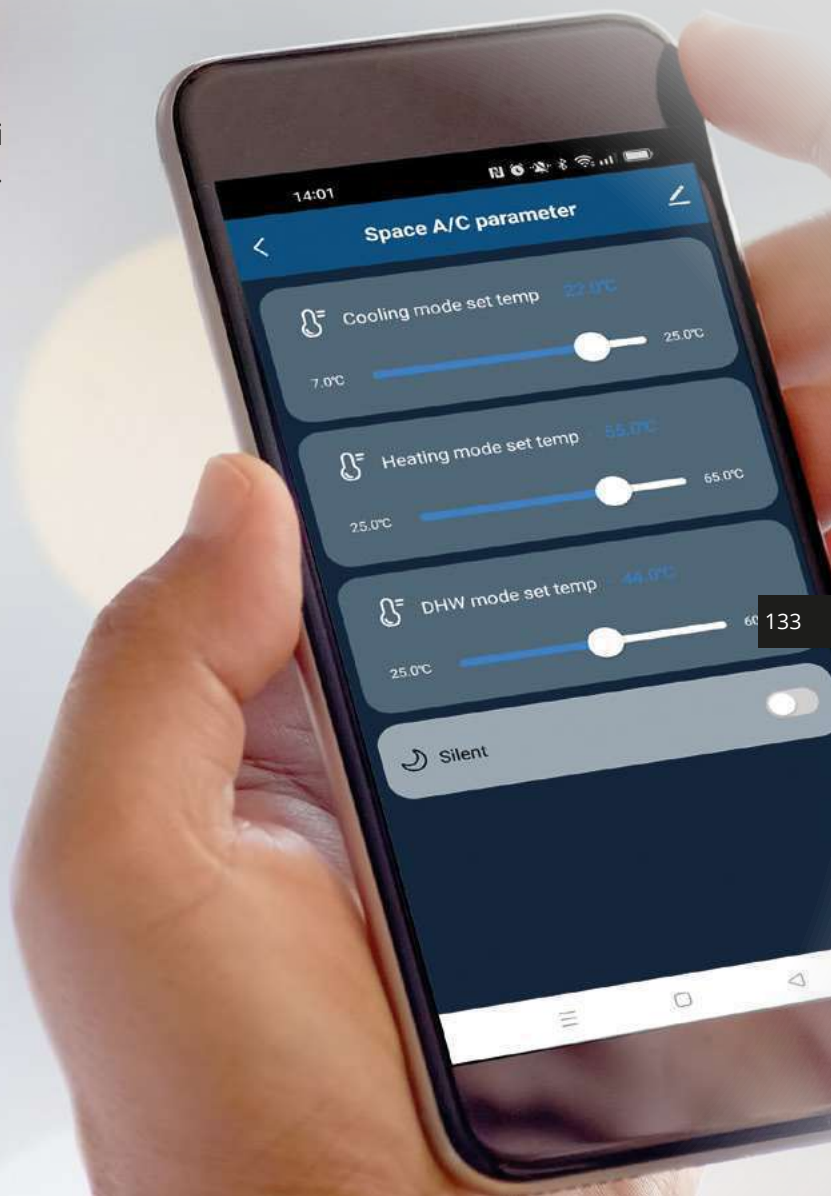


Powered by

**tuya**

Intelligence  
Inside

# Unit dimensions


## AIRMI SERIES

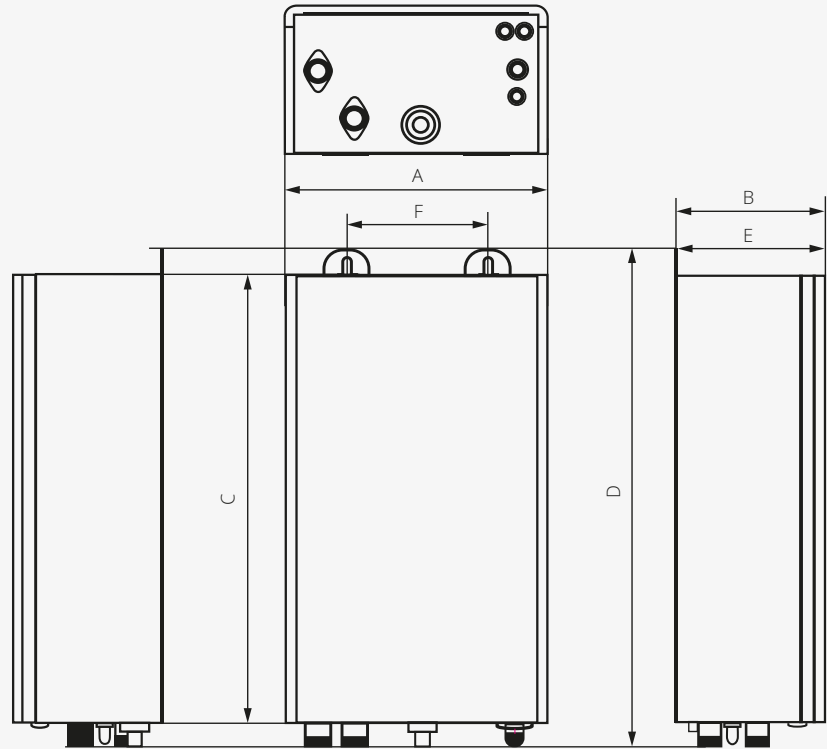

### Rotenso Airmi Split indoor unit 4/6/8/10/12/14/16 kW


| Model      | Power | Net dimensions (W×D×H) [mm] | A   | B   | C   | D   | E   | F   | Net weight [kg] |
|------------|-------|-----------------------------|-----|-----|-----|-----|-----|-----|-----------------|
| AIS40X11   | 4 kW  | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 34 kg           |
| AIS60X11   | 6 kW  | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 34 kg           |
| AIS80X13i  | 8 kW  | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 37 kg           |
| AIS100X13i | 10 kW | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 37 kg           |
| AIS120X13i | 12 kW | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 38 kg           |
| AIS140X13i | 14 kW | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 44 kg           |
| AIS160X13i | 16 kW | 909 × 465 × 273             | 465 | 273 | 820 | 909 | 271 | 255 | 44 kg           |

134

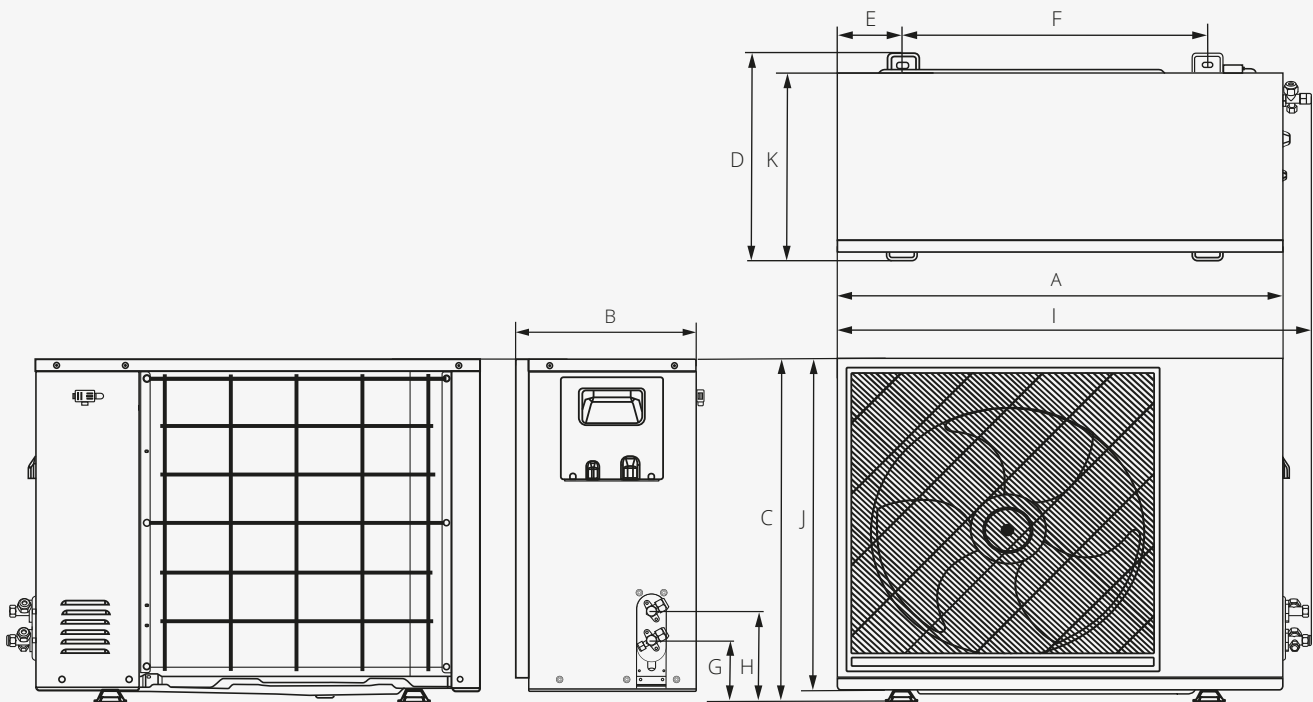


### Rotenso Airmi Split outdoor unit 4/6/8 kW

| Model           | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (S1×S2×G) [mm] | A   | B   | C   | D   | E   | F   | G   | H  | I   | J   | K   | Net weight [kg] |
|-----------------|-------|-----------------------------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----------------|
| AIS/W/B/G/40X1o | 4 kW  | 971 × 425 × 703             | 624 × 425                      | 913 | 370 | 703 | 425 | 135 | 624 | 126 | 60 | 971 | 681 | 375 | 56.0            |
| AIS/W/B/G/60X1o | 6 kW  | 971 × 425 × 703             | 624 × 425                      | 913 | 370 | 703 | 425 | 135 | 624 | 126 | 60 | 971 | 681 | 375 | 56.0            |
| AIS/W/B/G/80X1o | 8 kW  | 971 × 425 × 703             | 624 × 425                      | 913 | 370 | 703 | 425 | 135 | 624 | 126 | 60 | 971 | 681 | 375 | 56.0            |

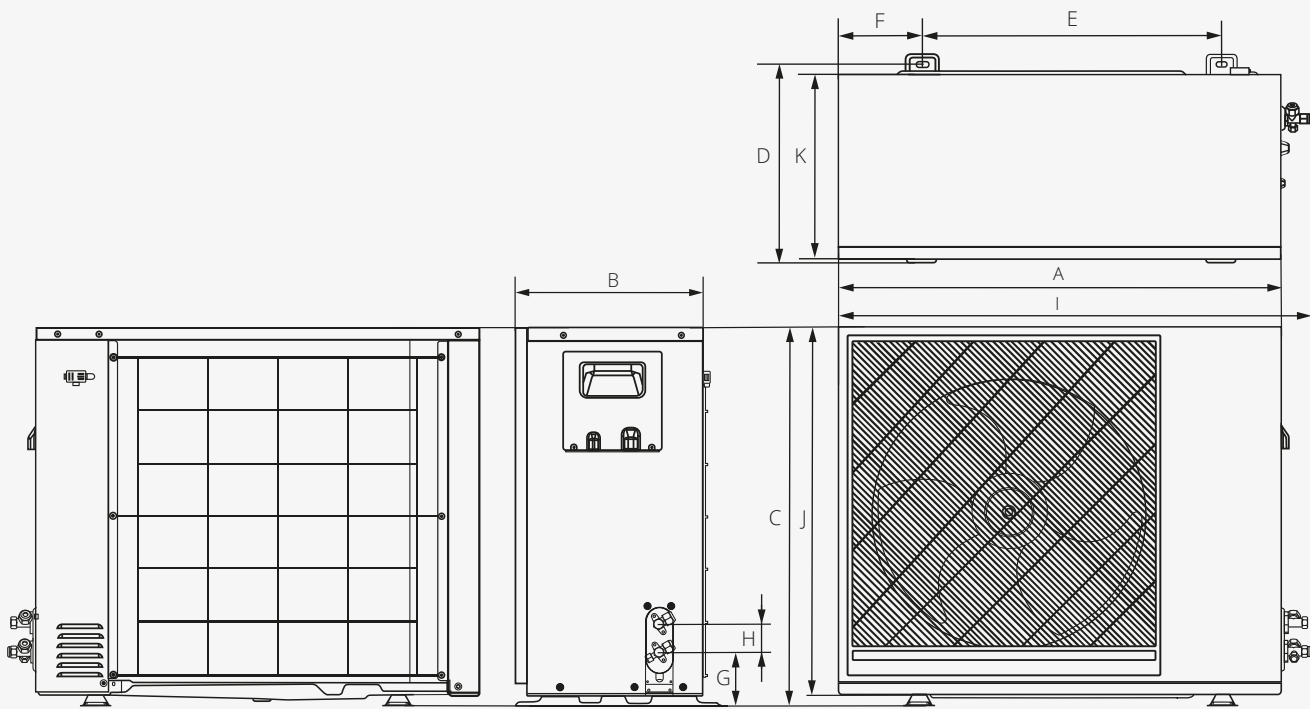


## Rotenso Airmi Split outdoor unit 10/12 kW

| Model            | Power | Net dimensions<br>(W×D×H) [mm] | Bracket spacing<br>(W1×W2×D) [mm] | A   | B   | C   | D   | E   | F   | G   | H  | I   | J   | K   | Net weight<br>[kg] |
|------------------|-------|--------------------------------|-----------------------------------|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|--------------------|
| AIS/W/B/G/100X1o | 10 kW | 999 × 448 × 803                | 643 × 448                         | 940 | 396 | 803 | 448 | 643 | 171 | 116 | 60 | 999 | 778 | 405 | 72,0               |
| AIS/W/B/G/120X3o | 12 kW | 999 × 448 × 803                | 643 × 448                         | 940 | 396 | 803 | 448 | 643 | 171 | 116 | 60 | 999 | 778 | 405 | 83,0               |

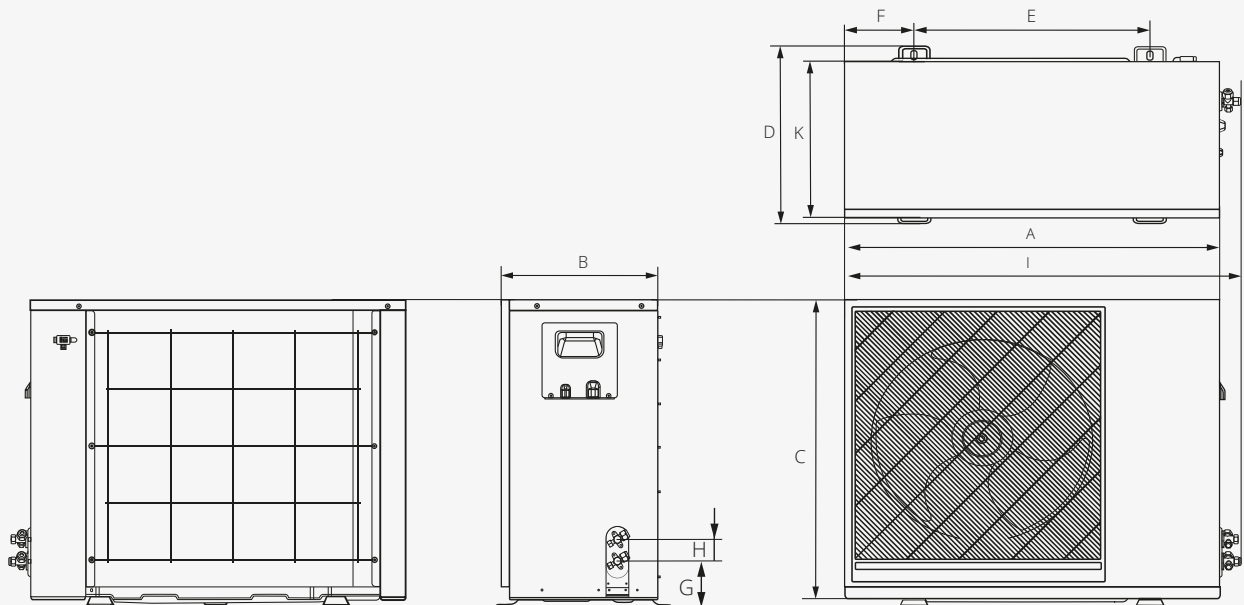


## Jednostka zewnętrzna 14/16 kW Rotenso Airmi Split

| Model            | Power | Net dimensions<br>(W×D×H) [mm] | Bracket spacing<br>(W1×W2×D) [mm] | A    | B   | C   | D   | E   | F   | G   | H  | I    | K   | Net weight<br>[kg] |
|------------------|-------|--------------------------------|-----------------------------------|------|-----|-----|-----|-----|-----|-----|----|------|-----|--------------------|
| AIS/W/B/G/140X3o | 14 kW | 1099 × 436 × 854               | 654 × 493                         | 1040 | 436 | 832 | 429 | 654 | 193 | 128 | 60 | 1099 | 454 | 108,0              |
| AIS/W/B/G/160X3o | 16 kW | 1099 × 436 × 854               | 654 × 493                         | 1040 | 436 | 832 | 429 | 654 | 193 | 128 | 60 | 1099 | 454 | 108,0              |

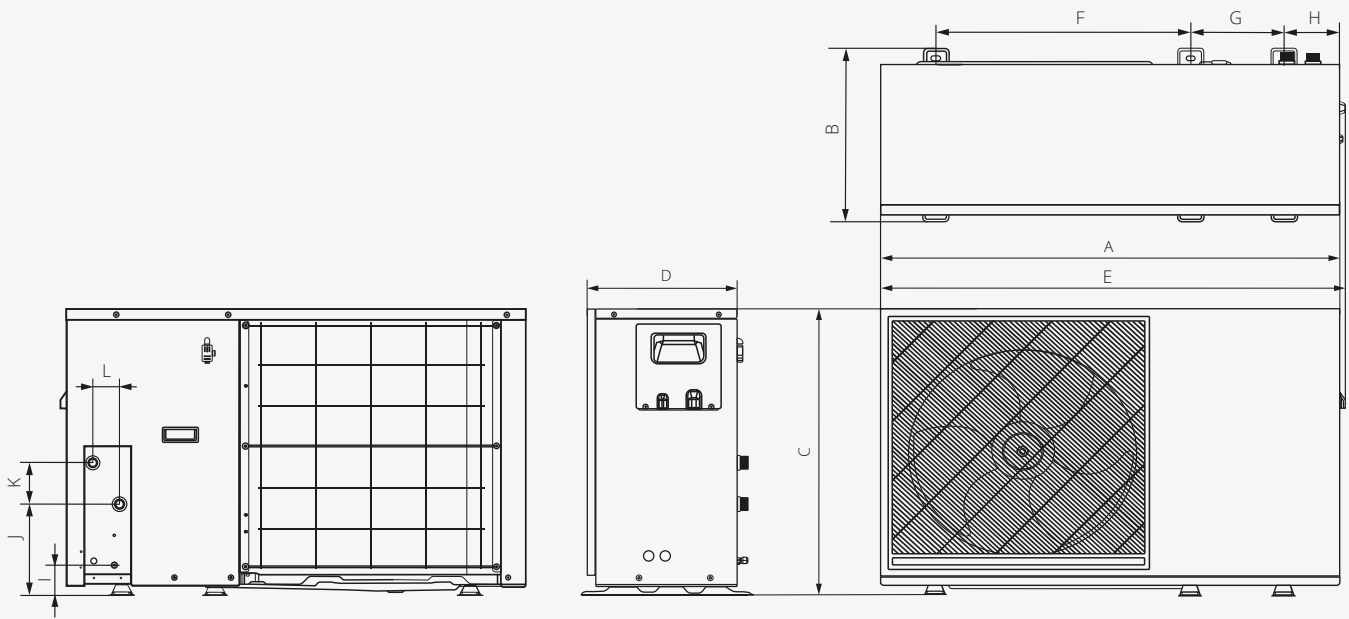

### Rotenso Airmi Monoblock outdoor unit 4/6/8 kW

| Model          | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W1×W2×D) [mm] | A    | B   | C   | D   | E    | F   | G   | H  | I  | J   | K  | L  | Net weight [kg] |
|----------------|-------|-----------------------------|--------------------------------|------|-----|-----|-----|------|-----|-----|----|----|-----|----|----|-----------------|
| AIM/W/B/G/40X1 | 4 kW  | 1125 × 425 × 703            | 624 × 229 × 425                | 1125 | 425 | 703 | 397 | 1137 | 640 | 239 | 86 | 73 | 317 | 65 | 57 | 78.5            |
| AIM/W/B/G/60X1 | 6 kW  | 1125 × 425 × 703            | 624 × 229 × 425                | 1125 | 425 | 703 | 397 | 1137 | 640 | 239 | 86 | 73 | 317 | 65 | 57 | 80.5            |
| AIM/W/B/G/80X1 | 8 kW  | 1125 × 425 × 703            | 624 × 229 × 425                | 1125 | 425 | 703 | 397 | 1137 | 640 | 239 | 86 | 73 | 317 | 65 | 57 | 82.5            |

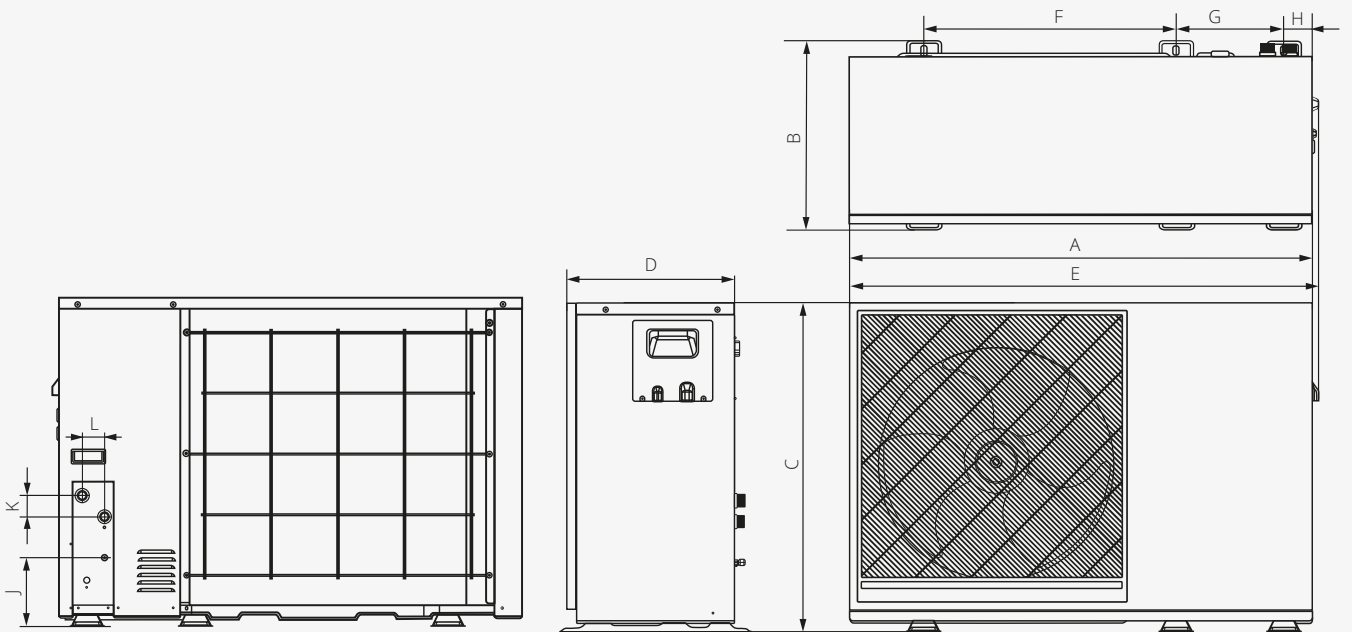


### Rotenso Airmi Monoblock outdoor unit 10/12/14/16 kW

| Model           | Power | Net dimensions (W×D×H) [mm] | Bracket spacing (W1×W2×D) [mm] | A    | B   | C   | D   | E    | F   | G   | H  | J   | K  | L  | Net weight [kg] |
|-----------------|-------|-----------------------------|--------------------------------|------|-----|-----|-----|------|-----|-----|----|-----|----|----|-----------------|
| AIM/W/B/G/100X1 | 10 kW | 1135 × 488 × 803            | 640 × 239 × 448                | 1135 | 488 | 803 | 422 | 1149 | 640 | 239 | 86 | 252 | 65 | 57 | 99.0            |
| AIM/W/B/G/120X3 | 12 kW | 1135 × 488 × 803            | 640 × 239 × 448                | 1135 | 488 | 803 | 422 | 1149 | 640 | 239 | 86 | 252 | 65 | 57 | 115.0           |
| AIM/W/B/G/140X3 | 14 kW | 1203 × 493 × 860            | 654 × 280 × 493                | 1203 | 493 | 860 | 461 | 1217 | 654 | 280 | 75 | 179 | 55 | 58 | 140.0           |
| AIM/W/B/G/160X3 | 16 kW | 1203 × 493 × 860            | 654 × 280 × 493                | 1203 | 493 | 860 | 461 | 1217 | 654 | 280 | 75 | 179 | 55 | 58 | 140.0           |

# Solutions

## AIRMI SERIES

---

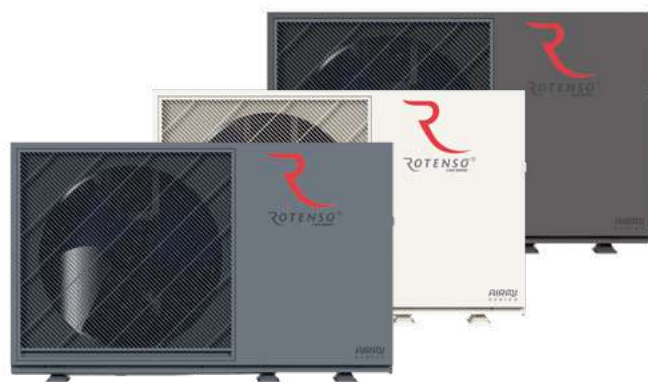

**Rotenso Airmi Split** is a brand new series of energy-efficient split heat pumps with capacities ranging from 4 to 16 kW.



**Rotenso Airmi Monoblock** is a brand new series of monoblock heat pumps with capacities ranging from 4 to 16kW.



# Solution

## AIRMI SPLIT

---



Rotenso Airmi Split heat pump consists of an outdoor unit (condenser) and a hydronic module (so called hydrobox) for indoor installation. This solution is characterized by high resistance to freezing of the connection between the refrigeration circuits of outdoor and indoor units, even during prolonged power outages.

Another advantage of the Airmi Series is compact hydrobox that can be easily integrated in furniture or building structures, and sleek design of the outdoor unit available in three colours: off-white, grey and graphite. Modern design and high efficiency at low temperatures make Rotenso Airmi Split heat pumps a perfect choice for heating homes, stores, commercial premises and offices.

### Standard equipment:


1. Indoor unit
2. Outdoor unit
3. Wired controller
4. DHW tank sensor
5. Plate heat exchanger
6. Flow meter
7. Diaphragm vessel
8. Pressure gauge
9. Circulation pump
10. Pressure relief valve
11. Purge valve
12. Y water filter





Indoor unit  
Hydrobox

AIS40X1i, AIS60X1i, AIS80X13i, AIS100X13i,  
AIS120X13i, AIS140X13i, AIS160X13i

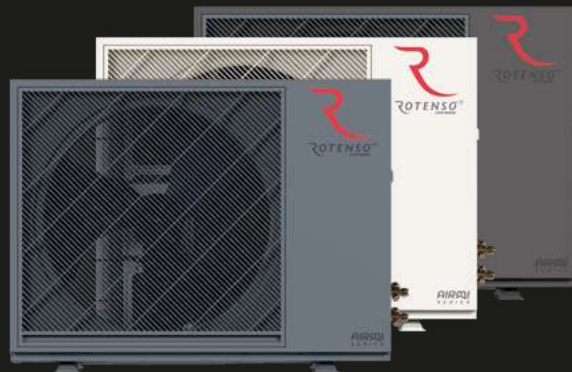

4-16 kW

| Model          | Rotenso Airmi Split |   |   |    |    |    |    |
|----------------|---------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                   | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f | •                   | • | • | •  |    |    |    |
| 380-420~50, 3f |                     |   |   |    | •  | •  | •  |

# Solution

## AIRMI MONOBLOCK

---



Rotenso Airmi Monoblock is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing. The monoblock heat pump is a perfect solution for owners who have no space or wish to install the hydrobox inside the building.



Heat pump housing is designed to provide an easy access to all its components, while operating parameters can be quickly modified and monitored in real time from the user interface. The state-of-the-art technology used in the Rotenso Airmi Series monoblock solutions ensures high efficiency at low temperatures. Simple design of these units, which come in three colour variants (off-white, grey and graphite), will please the enthusiasts of modern architecture. Another benefit of monoblock is quick and easy installation.

### Standard equipment:

1. Outdoor unit
2. Wired controller
3. DHW tank sensor
4. Plate heat exchanger
5. Flow meter
6. Diaphragm vessel
7. Circulation pump
8. Pressure relief valve
9. Purge valve
10. Y water filter

140



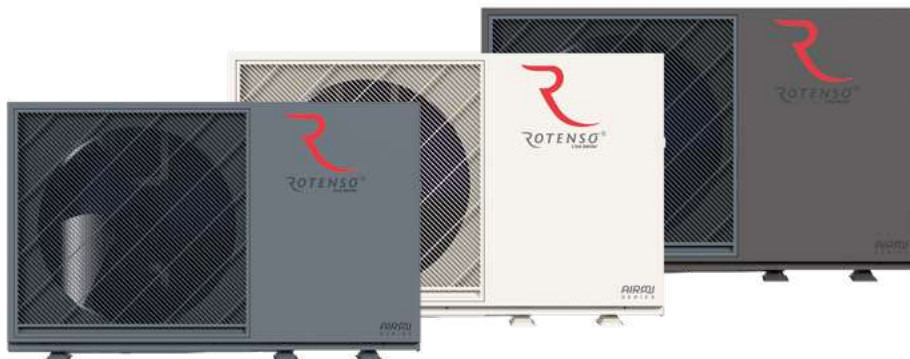

4-16 kW

| Model          | Rotenso Airmi Monoblock |   |   |    |    |    |    |
|----------------|-------------------------|---|---|----|----|----|----|
| Capacity (kW)  | 4                       | 6 | 8 | 10 | 12 | 14 | 16 |
| 220-240~50, 1f | •                       | • | • | •  |    |    |    |
| 380-420~50, 3f |                         |   |   |    | •  | •  | •  |



142

## Airmi Series **Split**

---

**Rotenso Airmi Split heat pump consists of an outdoor unit and a sleek, compact hydronic module (so called hydrobox) for indoor installation. The highest energy efficiency class A+++ combined with excellent capacity at extremely low outdoor temperatures ensure cost-effective and reliable operation of this ecological heat source.**

Prepared for operation at extremely low outdoor temperatures of down to  $-25^{\circ}\text{C}$ , Rotenso Airmi pumps can heat the heating water up to  $65^{\circ}\text{C}$  to supply central heating systems with conventional radiators as well.

The **COP** of **4.89\*** means that the amount of heating energy produced by the Rotenso Airmi heat pumps is nearly five times the amount of the consumed electric energy.

Enhanced energy efficiency, unique fan blade design, and twin rotary DC compressor, ensure high overall efficiency of the Rotenso Airmi units.

The heat pump can be controlled by a wired controller or a TUYA SMART mobile app to make its daily use even more comfortable.



# AIRMI SPLIT



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Smart Grid  
functionality



Controller  
equipped with a  
temperature  
sensor



Integrated Wi-Fi  
module



Control via  
mobile app



Modern, minimalist body and stylish  
colour scheme to match the appropriate  
outdoor unit colour to building facade.

\* COP 4,89 for AISW/B/G40X1 and AISW/B/G60X1





144


## Controller equipped with a temperature sensor

The Rotenso Airmi Split heat pump can be controlled both by the wired controller and the TUYA SMART mobile app, whether you are staying at home or not.



### Operating range down to -25°C

The pump is prepared to operate efficiently even at extreme outdoor temperatures down to -25°C. During the cold winter, it guarantees that supply water for central heating and domestic hot water is heated sufficiently.

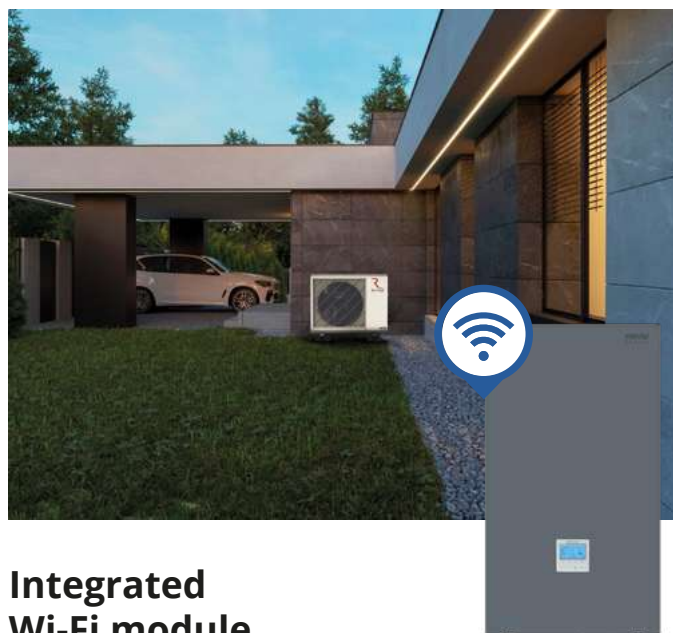

### Integrated Wi-Fi module

The Rotenso Airmi Split heat pump can be controlled both by the wired controller and the TUYA SMART mobile app, whether you are staying at home or not.




## Smart Grid functionality

---

The heat pump is designed to work with the „Smart Grid“. With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.

145

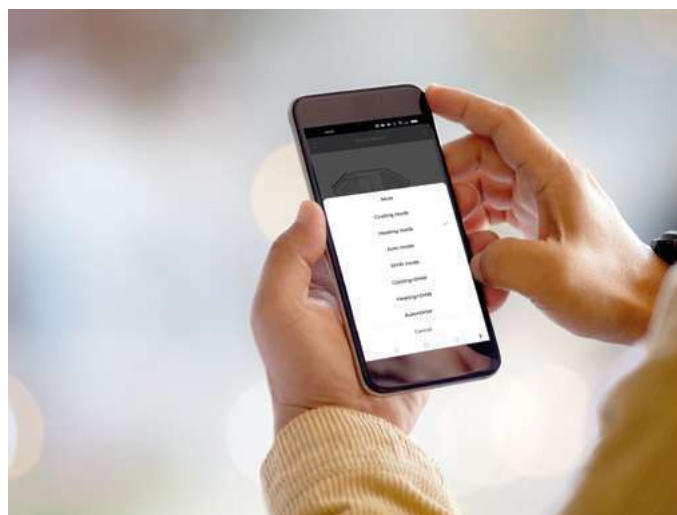

## Control via mobile app

You can use your tablet or smartphone to control the Rotenso Airmi Split unit no matter where you are.



## Water supply temperature of 65°C

If the heat pump is used to heat spaces where radiators are installed the temperature of the supply water in the system must be higher. Rotenso Airmi heat pumps can heat water up to 65°C.
































# Airmi Split

4-16 kW



## Device features

146

|   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| Environmentally friendly refrigerant R32  | Efficient heating   | Energy efficiency class at 35°C A+++  | Energy efficiency class at 55°C A++   | Maximum COP 4,89 <sup>(1)</sup>   | Operating range down to -25°C   | Supply water temperature of 65°C  | Smart Grid functionality  |
|  |  |  |  |  |  |  |  |
| Twin rotary compressor  | Integrated electric heater  | Outdoor unit drip tray heater   | Compressor crankcase heater   | Indoor unit drip tray   | Easy installation and maintenance   | Compact indoor split unit housing   | Maximum installation length up to 15m   |
|  |  |  |  |  |  |  |  |
| Silent mode   | Integrated Wi-Fi module   | Daily operation schedule  | Configurable weekly schedules   | Vacation mode   | Menu in English   | Multilanguage menu  | Integrated temperature sensor   |
|  |  |  |  |  |  |  |   |
| Weather operating modes (climate curve)   | 2 heating control zones   | Dedicated application   | Disinfection  | Maximum leaving water temperature of 60°C (in DHW mode)                             | Prepared to create a cascade system   | Modbus Protocol   |   |

1. Refers to units AIS/W/B/G/40X1o and AIS/W/B/G/60X1o

# Technical specification

| Indoor unit model  |   |                  | AIS40X11                           | AIS60X11                   | AIS80X131        | AIS100X131       | AIS120X131       | AIS140X131       | AIS160X131        |               |
|--|---|------------------|------------------------------------|----------------------------|------------------|------------------|------------------|------------------|-------------------|---------------|
| EAN product code   |   |                  | 5905567602825                      | 5905567602832              | 5905567602849    | 5905567602856    | 5905567602863    | 5905567602870    | 5905567602887     |               |
| Compatible outdoor unit model  |   |                  | AIS/W/B/G/40X1o                    | AIS/W/B/G/60X1o            | AIS/W/B/G/80X1o  | AIS/W/B/G/100X1o | AIS/W/B/G/120X3o | AIS/W/B/G/140X3o | AIS/W/B/G/160X3o  |               |
| Operation modes  |   |                  | Heating and cooling                |                            |                  |                  |                  |                  |                   |               |
| Leaving water temperature  | Space cooling   | °C               | 7-25                               | 7-25                       | 7-25             | 7-25             | 7-25             | 7-25             | 7-25              |               |
|  | Space heating   | °C               | 25-65                              | 25-65                      | 25-65            | 25-65            | 25-65            | 25-65            | 25-65             |               |
|  | DHW (tank)  | °C               | 25-60                              | 25-60                      | 25-60            | 25-60            | 25-60            | 25-60            | 25-60             |               |
| Power supply   |   | V-Hz, Ø          | 220-240-50, 1f                     | 220-240-50, 1f             | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f    |               |
| Rated input  |   | W                | 3090                               | 3090                       | 9090             | 9090             | 9090             | 9090             | 9090              |               |
| Operating current  |   | A                | 13,9                               | 13,9                       | 13,9             | 13,9             | 13,9             | 13,9             | 13,9              |               |
| Sound power level  |   | dB               | 42                                 | 42                         | 42               | 42               | 42               | 42               | 42                |               |
| Electric heater  | Power supply  | V-Hz, Ø          | 220-240-50, 1f                     | 220-240-50, 1f             | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f   | 380-415-50, 3f    |               |
|  | Number of heating stages                                      | pcs              | 1                                  | 1                          | 3                | 3                | 3                | 3                | 3                 |               |
|  | Power   | kW               | 3                                  | 3                          | 9                | 9                | 9                | 9                | 9                 |               |
|  | Maximum operating current                                     | A                | 13,6                               | 13,6                       | 13,6             | 13,6             | 13,6             | 13,6             | 13,6              |               |
| Net dimensions   |   | W x D x H        | mm                                 | 909 x 465 x 273            | 909 x 465 x 273  | 909 x 465 x 273  | 909 x 465 x 273  | 909 x 465 x 273  | 909 x 465 x 273   |               |
| Gross dimensions   |   | W x D x H        | mm                                 | 960 x 525 x 345            | 960 x 525 x 345  | 960 x 525 x 345  | 960 x 525 x 345  | 960 x 525 x 345  | 960 x 525 x 345   |               |
| Net weight / Gross weight  |   | kg               | 34 / 38                            | 34 / 38                    | 37 / 41          | 37 / 41          | 38 / 43          | 44 / 49          | 44 / 49           |               |
| Water circuit  | Water connections   |                  | inch                               | Ø33                        | Ø33              | Ø33              | Ø33              | Ø33              | Ø33               |               |
|  | Pressure relief valve   |                  | MPa                                | 0,5                        | 0,5              | 0,5              | 0,5              | 0,5              | 0,5               |               |
|  | Condensate drain  |                  | mm                                 | Ø12,7                      | Ø12,7            | Ø12,7            | Ø12,7            | Ø12,7            | Ø12,7             |               |
|  | Expansion tank  | Total volume     | l                                  | 5                          | 5                | 5                | 5                | 5                | 5                 |               |
|  |   | Actual volume    | l                                  | 2                          | 2                | 2                | 2                | 2                | 2                 |               |
|  |   | Maximum pressure | MPa                                | 0,5                        | 0,5              | 0,5              | 0,5              | 0,5              | 0,5               |               |
|  |   | Initial pressure | MPa                                | 0,15                       | 0,15             | 0,15             | 0,15             | 0,15             | 0,15              |               |
|  | Heat exchanger  |                  | Type                               | PHE / plate heat exchanger |                  |                  |                  |                  |                   |               |
|  | Water pump head   |                  | m                                  | 9                          | 9                | 9                | 9                | 9                | 9                 |               |
|  | Water pump type   |                  |                                    | DC inverter                | DC inverter      | DC inverter      | DC inverter      | DC inverter      | DC inverter       |               |
| Refrigerant circuit  |   | Liquid / Gas     | mm                                 | Ø6,35 / Ø15,88             | Ø6,35 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88    |               |
| Minimal wire pcs and dimension of cords*                                   |   | pcs x mm²        | 3 x 2,5                            | 3 x 2,5                    | 5 x 2,5          | 5 x 2,5          | 5 x 2,5          | 5 x 2,5          | 5 x 2,5           |               |
| Control cables: indoor unit to outdoor unit                                |   | pcs x mm²        | 2 x 0,75 (shielded cable)          |                            |                  |                  |                  |                  |                   |               |
| Outdoor unit model   |   |                  | AIS/W/B/G/40X1o                    | AIS/W/B/G/60X1o            | AIS/W/B/G/80X1o  | AIS/W/B/G/100X1o | AIS/W/B/G/120X3o | AIS/W/B/G/140X3o | AIS/W/B/G/160X3o  |               |
| EAN product code   |   |                  | White (W)                          | 5905567602757              | 5905567602764    | 5905567602771    | 5905567602788    | 5905567602795    | 5905567602801     | 5905567602818 |
| EAN product code   |   |                  | Graphite (B)                       | 5905567602610              | 5905567602627    | 5905567602634    | 5905567602641    | 5905567602658    | 5905567602665     | 5905567602672 |
| EAN product code   |   |                  | Grey (G)                           | 5905567602689              | 5905567602696    | 5905567602702    | 5905567602719    | 5905567602726    | 5905567602733     | 5905567602740 |
| Compatible indoor unit model   |   |                  | AIS40X11                           | AIS60X11                   | AIS80X131        | AIS100X131       | AIS120X131       | AIS140X131       | AIS160X131        |               |
| Power supply   |   | V-Hz, Ø          | 220-240-50, 1f                     | 220-240-50, 1f             | 220-240-50, 1f   | 220-240-50, 1f   | 380-420-50, 3f   | 380-420-50, 3f   | 380-420-50, 3f    |               |
| Heating (A7/W35)   | Capacity  | kW               | 4,20                               | 6,00                       | 7,90             | 9,70             | 12,10            | 14,30            | 16,20             |               |
|  | Rated input   | kW               | 0,86                               | 1,23                       | 1,75             | 2,10             | 2,68             | 3,10             | 3,67              |               |
|  | COP   |                  | 4,89                               | 4,89                       | 4,52             | 4,61             | 4,52             | 4,61             | 4,41              |               |
| Heating (A7/W45)   | Capacity  | kW               | 4,10                               | 6,10                       | 8,30             | 9,90             | 11,60            | 14,50            | 16,20             |               |
|  | Rated input   | kW               | 1,18                               | 1,70                       | 2,41             | 2,83             | 3,66             | 3,89             | 4,48              |               |
|  | COP   |                  | 3,47                               | 3,58                       | 3,45             | 3,48             | 3,17             | 3,72             | 3,62              |               |
| Heating (A7/W55)   | Capacity  | kW               | 4,00                               | 6,20                       | 8,00             | 9,90             | 11,70            | 14,10            | 16,20             |               |
|  | Rated input   | kW               | 1,65                               | 2,18                       | 2,96             | 3,58             | 4,30             | 4,52             | 5,59              |               |
|  | COP   |                  | 2,42                               | 2,84                       | 2,70             | 2,77             | 2,72             | 3,12             | 2,90              |               |
| Cooling (A35/W18)  | Capacity  | kW               | 4,20                               | 6,20                       | 8,10             | 10,30            | 12,10            | 13,50            | 14,90             |               |
|  | Rated input   | kW               | 0,78                               | 1,29                       | 1,76             | 2,25             | 2,99             | 3,75             | 4,38              |               |
|  | EER   |                  | 5,41                               | 4,81                       | 4,59             | 4,58             | 4,04             | 3,65             | 3,41              |               |
| Cooling (A35/W7)   | Capacity  | kW               | 4,20                               | 6,00                       | 7,70             | 9,60             | 10,90            | 12,70            | 14,00             |               |
|  | Rated input   | kW               | 1,35                               | 2,04                       | 2,77             | 3,26             | 4,09             | 4,98             | 5,71              |               |
|  | EER   |                  | 3,12                               | 2,94                       | 2,78             | 2,94             | 2,66             | 2,55             | 2,45              |               |
| Seasonal energy efficiency LWT at 35°C                                     | SCOP <sup>(1)</sup>   |                  | 4,88                               | 4,90                       | 4,61             | 4,82             | 4,73             | 4,98             | 4,87              |               |
|  | Rated heat output   | kW               | 4,0                                | 5,9                        | 7,1              | 8,9              | 11,3             | 13,2             | 14,4              |               |
|  | Seasonal energy efficiency ratio (ηS)                         | %                | 192                                | 193                        | 177              | 190              | 186              | 196              | 192               |               |
|  | Annual energy consumption                                     | kWh              | 1693                               | 2488                       | 3249             | 3814             | 4949             | 5470             | 6095              |               |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                  | A+++                               | A+++                       | A+++             | A+++             | A+++             | A++              | A+++              |               |
| Seasonal energy efficiency LWT at 59°C                                     | SCOP <sup>(1)</sup>   |                  | 3,40                               | 3,36                       | 3,21             | 3,21             | 3,49             | 3,49             | 3,69              |               |
|  | Rated heat output   | kW               | 5,0                                | 5,6                        | 7,3              | 7,8              | 10,7             | 13,0             | 13,0              |               |
|  | Seasonal energy efficiency ratio (ηS)                         | %                | 133                                | 131                        | 126              | 126              | 136              | 136              | 144               |               |
|  | Annual energy consumption                                     | kWh              | 3038                               | 3443                       | 4667             | 4992             | 6353             | 7687             | 7302              |               |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                  | A+                                 | A+                         | A+               | A+               | A+               | A+               | A+                |               |
| SEER   | LWT at 7°C  |                  | 5,33                               | 5,27                       | 5,23             | 5,12             | 5,65             | 5,39             | 5,23              |               |
|  | LWT at 18°C   |                  | 8,29                               | 8,34                       | 8,19             | 8,23             | 9,01             | 7,71             | 7,78              |               |
| Minimum rated current of the overcurrent circuit breaker with breaker type |   |                  | A                                  | B16                        | B16              | B20              | B16              | B16              | B16               |               |
| Compressor   |   | Type             | Twin rotary inverter compressor DC |                            |                  |                  |                  |                  |                   |               |
| Fan  |   | Type             | Brushless DC motor / BLDC          |                            |                  |                  |                  |                  |                   |               |
|  |   | Quantity         | 1,40                               | 1,40                       | 1,50             | 1,60             | 1,75             | 1,84             | 1,84              |               |
| Refrigerant  | Type  |                  | R32                                | R32                        | R32              | R32              | R32              | R32              | R32               |               |
|  | GWP   |                  | 675                                | 675                        | 675              | 675              | 675              | 675              | 675               |               |
|  | Quantity  |                  | kg                                 | 1,40                       | 1,40             | 1,50             | 1,60             | 1,75             | 1,84              |               |
|  | TCO <sub>eq</sub>   |                  |                                    | 0,945                      | 0,945            | 1,013            | 1,080            | 1,181            | 1,242             |               |
| Pipe connections   | Liquid / Gas  |                  | mm                                 | Ø6,35 / Ø15,88             | Ø6,35 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88   | Ø9,52 / Ø15,88    |               |
|  | Minimum installation length                                   |                  | m                                  | 3                          | 3                | 3                | 3                | 3                | 3                 |               |
|  | Maximum installation length                                   |                  | m                                  | 15                         | 15               | 15               | 15               | 15               | 15                |               |
|  | Additional amount of refrigerant for over 7,5 linear meters   |                  | g/m                                | 20                         | 20               | 38               | 38               | 38               | 38                |               |
| Maximum height difference  | Outdoor unit above the indoor unit                            |                  | m                                  | 8                          | 8                | 8                | 8                | 8                | 8                 |               |
|  | Outdoor unit below the indoor unit                            |                  | m                                  | 8                          | 8                | 8                | 8                | 8                | 8                 |               |
| Minimal wire pcs and dimension of cords*                                   |   | pcs x mm²        | 3 x 2,5                            | 3 x 2,5                    | 3 x 4            | 3 x 4            | 5 x 2,5          | 5 x 2,5          | 5 x 2,5           |               |
| Control cables: indoor unit to outdoor unit                                |   | pcs x mm²        | 2 x 0,75 (shielded cable)          |                            |                  |                  |                  |                  |                   |               |
| Bracket spacing  |   | W1 x D           | mm                                 | 624 x 425                  | 624 x 425        | 624 x 425        | 643 x 448        | 643 x 448        | 654 x 493         |               |
| Sound pressure level   |   | dB(A)            | 44                                 | 45                         | 46               | 46               | 46               | 50               | 54                |               |
| Sound power level  |   | dB(A)            | 56                                 | 58                         | 59               | 60               | 64               | 65               | 68                |               |
| Net dimensions   |   | W x D x H        | mm                                 | 971 x 425 x 703            | 971 x 425 x 703  | 971 x 425 x 703  | 999 x 448 x 803  | 999 x 448 x 803  | 1099 x 436 x 854  |               |
| Gross dimensions   |   | W x D x H        | mm                                 | 1025 x 425 x 865           | 1025 x 425 x 865 | 1025 x 425 x 865 | 1045 x 458 x 970 | 1045 x 458 x 970 | 1165 x 495 x 1040 |               |
| Net weight / Gross weight  |   | kg               | 56 / 67                            | 56 / 67                    | 58 / 69          | 72 / 83          | 83 / 92          | 108 / 123        | 108 / 123         |               |
| Operating outdoor temperature  | Cooling / Heating   | °C               | -5-43 / -25-35                     | -5-43 / -25-35             | -5-43 / -25-35   | -5-43 / -25-35   | -5-43 / -25-35   | -5-43 / -25-35   | -5-43 / -25-35    |               |
|  | DHW   | °C               | -25-43                             | -25-43                     | -25-43           | -25-43           | -25-43           | -25-43           | -25-43            |               |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and 1(H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55, ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) No. 813/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>n</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.



## Airmi Series Monoblock

---

**Rotenso Airmi Monoblock is a heat pump in which the refrigeration module and the hydronic module are contained in a single, compact unit housing designed for outdoor installation to make the installation works easier and faster.**

Rotenso Airmi Monoblock pump is the best solution for building owners who either have no space or do not want to install additional hydronic module inside the building.

Rotenso Airmi Monoblock heat pump features the highest energy efficiency class A+++.

**COP** coefficient, which is a ratio of useful heating power to the consumed electric energy, is **5.25\*** in monoblock pumps, which means that the amount of heating energy that the Rotenso Airmi Monoblock produces is more than five times the amount of the consumed electric energy.

Heat pump housing is designed to provide an easy access to all its components, while operating parameters can be quickly modified and monitored in real time from the user interface.

Rotenso Airmi Monoblock heat pump is equipped with an anti-freeze system. Modern design and high efficiency at low temperatures make Rotenso Airmi pumps a perfect choice for heating homes, stores, commercial premises and offices.

**\* COP 5,25 for model AIMW/B/G40X1**



# AIRMI MONO BLOCK



Operating range  
down to -25°C



Supply water  
temperature  
of 65°C



Smart Grid  
functionality




Controller  
equipped with  
a temperature  
sensor



Integrated Wi-Fi  
module



Control via  
mobile app

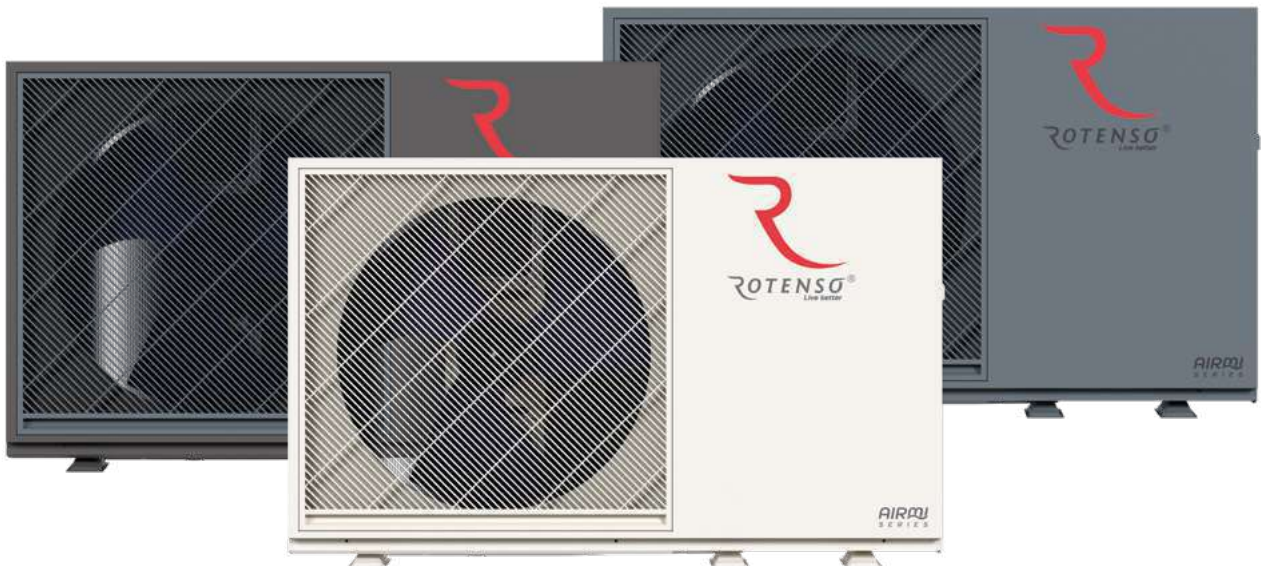



150

## Controller equipped with a temperature sensor

If the sensor detects a difference between the set temperature and the actual temperature in the room, the heat pump will automatically operate to reach the desired temperature inside the building



### Supply water temperature of 65°C

If the heat pump is used to heat spaces where radiators are installed, temperature of the supply water in the system must be higher. Rotenso Airmi heat pumps can heat water up to 65°C.



### Integrated Wi-Fi module

The Rotenso Airmi Monoblock pump can be controlled both by the wired controller and the TUYA SMART mobile whether you are staying at home or not



## Smart Grid functionality

---

Rotenso Airmi heat pump is designed to work with the „Smart Grid“. With this feature, the pump automatically turns on to store surplus energy from the photovoltaic (PV) system to make the most of the cheaper electricity tariff.

151



### Operating range down to -25°C

Heat pumps are prepared for efficient operation even at extreme outdoor temperatures as low as -25°C. During the cold winter, they guarantee that supply water for central heating and domestic hot water are heated sufficiently.




### Control via mobile app

You can use your tablet or smartphone to control the Rotenso Airmi Monoblock no matter where you are.





























# Airmi Monoblock

4-15 kW



## Device features

152

- |   |  |   |  |  |  |   |   |
|---|--|---|--|--|--|---|---|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                                       | <br>Energy efficiency class at 35°C A+++ | <br>Energy efficiency class at 55°C A++ | <br>Maximum COP 5,25 <sup>(1)</sup>   | <br>Operating range down to -25°C           | <br>Supply water temperature of 65°C | <br>Smart Grid functionality |
| <br>Twin rotary compressor                   | <br>Integrated electric heater                              | <br>Outdoor unit drip tray heater        | <br>Compressor crankcase heater         | <br>Easy installation and maintenance | <br>Silent mode                             | <br>WiFi module in wired controller  | <br>Daily operation schedule |
| <br>Configurable weekly schedules            | <br>Vacation mode   | <br>Menu in English                      | <br>Multilanguage menu                  | <br>Integrated temperature sensor     | <br>Weather operating modes (climate curve) | <br>2 heating control zones          | <br>Dedicated application    |
| <br>Disinfection                             | <br>Maximum leaving water temperature of 60°C (in DHW mode) | <br>Prepared to create a cascade system  | <br>Modbus Protocol                     |  |  |   |   |

1. Refers to units AIMW/BIG/40X1

# Technical specification

| Outdoor unit model   |   |                  | AIM/W/B/G/40X1                     | AIM/W/B/G/60X1             | AIM/W/B/G/80X1   | AIM/W/B/G/100X1  | AIM/W/B/G/120X3  | AIM/W/B/G/140X3   | AIM/W/B/G/160X3   |    |
|--|---|------------------|------------------------------------|----------------------------|------------------|------------------|------------------|-------------------|-------------------|----|
| EAN product code   | White (W)   |                  | 5905567602542                      | 5905567602559              | 5905567602566    | 5905567602573    | 5905567602580    | 5905567602597     | 5905567602603     |    |
| EAN product code   | Graphite (B)  |                  | 5905567602405                      | 5905567602412              | 5905567602429    | 5905567602436    | 5905567602443    | 5905567602450     | 5905567602467     |    |
| EAN product code   | Grey (G)  |                  | 5905567602474                      | 5905567602481              | 5905567602498    | 5905567602504    | 5905567602511    | 5905567602528     | 5905567602535     |    |
| Power supply   | V-Hz, Ø   |                  | 220-240-50, 1f                     | 220-240-50, 1f             | 220-240-50, 1f   | 220-240-50, 1f   | 380-420-50, 3f   | 380-420-50, 3f    | 380-420-50, 3f    |    |
| Heating (A7/W35)   | Capacity  | kW               | 4.00                               | 6.00                       | 7.90             | 10.20            | 12.10            | 14.50             | 15.90             |    |
|  | Rated input   | kW               | 0.75                               | 1.17                       | 1.76             | 2.04             | 2.57             | 2.99              | 3.42              |    |
|  | COP   |                  | 5.25                               | 5.13                       | 4.50             | 5.01             | 4.70             | 4.84              | 4.65              |    |
| Heating (A7/W45)   | Capacity  | kW               | 4.20                               | 6.00                       | 8.30             | 10.20            | 12.10            | 14.50             | 15.90             |    |
|  | Rated input   | kW               | 1.11                               | 1.63                       | 2.61             | 2.79             | 3.36             | 3.89              | 4.63              |    |
|  | COP   |                  | 3.77                               | 3.70                       | 3.18             | 3.65             | 3.60             | 3.72              | 3.43              |    |
| Heating (A7/W55)   | Capacity  | kW               | 4.10                               | 6.10                       | 7.70             | 9.60             | 12.30            | 13.80             | 15.80             |    |
|  | Rated input   | kW               | 1.46                               | 2.13                       | 2.98             | 3.22             | 4.44             | 4.52              | 6.12              |    |
|  | COP   |                  | 2.84                               | 2.86                       | 2.58             | 2.98             | 2.77             | 3.12              | 2.58              |    |
| Cooling (A35/W18)  | Capacity  | kW               | 4.00                               | 6.20                       | 8.20             | 10.10            | 11.90            | 14.10             | 15.70             |    |
|  | Rated input   | kW               | 0.77                               | 1.26                       | 1.75             | 2.42             | 2.72             | 3.10              | 4.03              |    |
|  | EER   |                  | 5.19                               | 4.91                       | 4.65             | 4.14             | 4.36             | 4.56              | 3.90              |    |
| Cooling (A35/W7)   | Capacity  | kW               | 4.30                               | 6.30                       | 7.60             | 8.80             | 11.60            | 14.30             | 16.00             |    |
|  | Rated input   | kW               | 1.32                               | 1.99                       | 2.55             | 2.97             | 4.14             | 5.11              | 6.12              |    |
|  | EER   |                  | 3.24                               | 3.14                       | 2.97             | 2.96             | 2.80             | 2.80              | 2.61              |    |
| Seasonal energy efficiency LWT at 35°C                                     | SCOP <sup>(1)</sup>   |                  | 4.96                               | 5.05                       | 4.62             | 4.86             | 4.77             | 4.67              | 4.87              |    |
|  | Rated heat output   | kW               | 4.0                                | 6.0                        | 7.5              | 9.2              | 11.3             | 13.2              | 14.9              |    |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                | 201                                | 199                        | 183              | 206              | 188              | 184               | 192               |    |
|  | Annual energy consumption                                     | kWh              | 1617                               | 2455                       | 3529             | 3617             | 4872             | 5821              | 6326              |    |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                  | A+++                               | A+++                       | A+++             | A+++             | A+++             | A+++              | A+++              |    |
| Seasonal energy efficiency LWT at 55°C                                     | SCOP <sup>(1)</sup>   |                  | 3.47                               | 3.52                       | 3.32             | 3.51             | 3.65             | 3.62              | 3.60              |    |
|  | Rated heat output   | kW               | 5.00                               | 5.80                       | 6.70             | 7.70             | 11.00            | 12.40             | 12.80             |    |
|  | Seasonal energy efficiency ratio (η <sub>S</sub> )            | %                | 136                                | 138                        | 131              | 139              | 141              | 142               | 143               |    |
|  | Annual energy consumption                                     | kWh              | 2375                               | 3521                       | 4162             | 4453             | 6319             | 7054              | 7238              |    |
|  | Seasonal space heating energy efficiency class <sup>(1)</sup> |                  | A++                                | A++                        | A++              | A++              | A++              | A++               | A++               |    |
| SEER   | LWT at 7°C  |                  | 5.15                               | 5.27                       | 5.17             | 4.66             | 5.45             | 5.59              | 5.38              |    |
|  | LWT at 18°C   |                  | 8.56                               | 8.77                       | 8.31             | 8.23             | 8.29             | 8.33              | 8.26              |    |
| Minimum rated current of the overcurrent circuit breaker with breaker type | A   |                  | B32                                | B32                        | B32              | B32              | B25              | B25               | B25               |    |
| Compressor   | Type  |                  | Twin rotary inverter compressor DC |                            |                  |                  |                  |                   |                   |    |
| Fan  | Type  |                  | Brushless DC motor / BLDC          |                            |                  |                  |                  |                   |                   |    |
|  | Quantity  |                  | 1                                  | 1                          | 1                | 1                | 1                | 1                 | 1                 |    |
| Refrigerant  | Type  |                  | R32                                | R32                        | R32              | R32              | R32              | R32               | R32               |    |
|  | GWP   |                  | 675                                | 675                        | 675              | 675              | 675              | 675               | 675               |    |
|  | Quantity  | kg               | 1.03                               | 1.03                       | 1.3              | 1.5              | 1.75             | 2.1               | 2.1               |    |
| Minimal wire pcs and dimension of cords*                                   | TCO <sub>eq</sub>   |                  | 0.695                              | 0.695                      | 0.878            | 1.013            | 1.181            | 1.417             | 1.417             |    |
|  | pcs × mm <sup>2</sup>   |                  | 3 × 6                              | 3 × 6                      | 3 × 6            | 3 × 6            | 5 × 4            | 5 × 4             | 5 × 4             |    |
| Bracket spacing  | W1 × W2 × D   | mm               | 624 × 229 × 425                    | 624 × 229 × 425            | 624 × 229 × 425  | 640 × 239 × 448  | 640 × 239 × 448  | 654 × 280 × 493   | 654 × 280 × 493   |    |
| Sound pressure level   |   | dB(A)            | 44                                 | 45                         | 46               | 46               | 46               | 50                | 54                |    |
| Sound power level  |   | dB(A)            | 56                                 | 58                         | 59               | 60               | 64               | 65                | 68                |    |
| Net dimensions   | W × D × H   | mm               | 1125 × 425 × 703                   | 1125 × 425 × 703           | 1125 × 425 × 703 | 1135 × 488 × 803 | 1135 × 488 × 803 | 1203 × 493 × 860  | 1203 × 493 × 860  |    |
| Gross dimensions   | W × D × H   | mm               | 1200 × 425 × 865                   | 1200 × 425 × 865           | 1200 × 425 × 865 | 1260 × 488 × 982 | 1260 × 488 × 982 | 1285 × 495 × 1040 | 1285 × 495 × 1040 |    |
| Net weight / Gross weight  |   | kg               | 78.5 / 93.5                        | 80.5 / 95.5                | 82.5 / 96        | 99 / 114         | 115 / 132        | 140 / 159         | 140 / 159         |    |
| Operating outdoor temperature  | Cooling / Heating   | °C               | -5-43 / -25-35                     | -5-43 / -25-35             | -5-43 / -25-35   | -5-43 / -25-35   | -5-43 / -25-35   | -5-43 / -25-35    | -5-43 / -25-35    |    |
|  | DHW   | °C               | -25-43                             | -25-43                     | -25-43           | -25-43           | -25-43           | -25-43            | -25-43            |    |
| Operation modes  |   |                  | Heating and cooling                |                            |                  |                  |                  |                   |                   |    |
| Leaving water temperature  | Space cooling   | °C               | 7-25                               | 7-25                       | 7-25             | 7-25             | 7-25             | 7-25              | 7-25              |    |
|  | Space heating   | °C               | 25-65                              | 25-65                      | 25-65            | 25-65            | 25-65            | 25-65             | 25-65             |    |
|  | DHW (tank)  | °C               | 25-60                              | 25-60                      | 25-60            | 25-60            | 25-60            | 25-60             | 25-60             |    |
| Electric heater  | Power supply  | V-Hz, Ø          | 220-240-50, 1f                     | 220-240-50, 1f             | 220-240-50, 1f   | 220-240-50, 1f   | 380-420-50, 3f   | 380-420-50, 3f    | 380-420-50, 3f    |    |
|  | Number of heating stages                                      | pcs              | 1                                  | 1                          | 1                | 1                | 3                | 3                 | 3                 |    |
|  | Power   | kW               | 3                                  | 3                          | 3                | 3                | 9                | 9                 | 9                 |    |
|  | Maximum operating current                                     |                  | 13.6                               | 13.6                       | 13.6             | 13.6             | 13.6             | 13.6              | 13.6              |    |
| Water circuit  | Water connections   | mm (inch)        | Ø33                                | Ø33                        | Ø33              | Ø33              | Ø33              | Ø33               | Ø33               |    |
|  | Pressure relief valve   | MPa              | 0.5                                | 0.5                        | 0.5              | 0.5              | 0.5              | 0.5               | 0.5               |    |
|  | Condensate drain  | mm               | 1/2"                               | 1/2"                       | 1/2"             | 1/2"             | 1/2"             | 1/2"              | 1/2"              |    |
|  | Expansion tank  | Total volume     | l                                  | 5                          | 5                | 5                | 5                | 5                 | 5                 |    |
|  |   | Actual volume    | l                                  | 2                          | 2                | 2                | 2                | 2                 | 2                 |    |
|  |   | Maximum pressure | MPa                                | 0.5                        | 0.5              | 0.5              | 0.5              | 0.5               | 0.5               |    |
|  |   | Initial pressure | MPa                                | 0.15                       | 0.15             | 0.15             | 0.15             | 0.15              | 0.15              |    |
|  | Heat exchanger  | Type             |                                    | PHE / plate heat exchanger |                  |                  |                  |                   |                   |    |
|  |   | Minimum flow     | l/min                              | 10                         | 10               | 10               | 10               | 10                | 10                | 10 |
|  | Water pump head   | m                | 9                                  | 9                          | 9                | 9                | 9                | 9                 | 9                 |    |
| Water pump type  |   |                  | DC inverter                        |                            |                  |                  |                  |                   |                   |    |
| Total water volume   | l   |                  | 0.72                               | 0.72                       | 0.86             |                  | 1.25             | 1.53              | 1.53              |    |

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>Δn</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# WE ARE FUTURE




154

DHW tanks  
Buffer tanks  
**Rotenso**


---



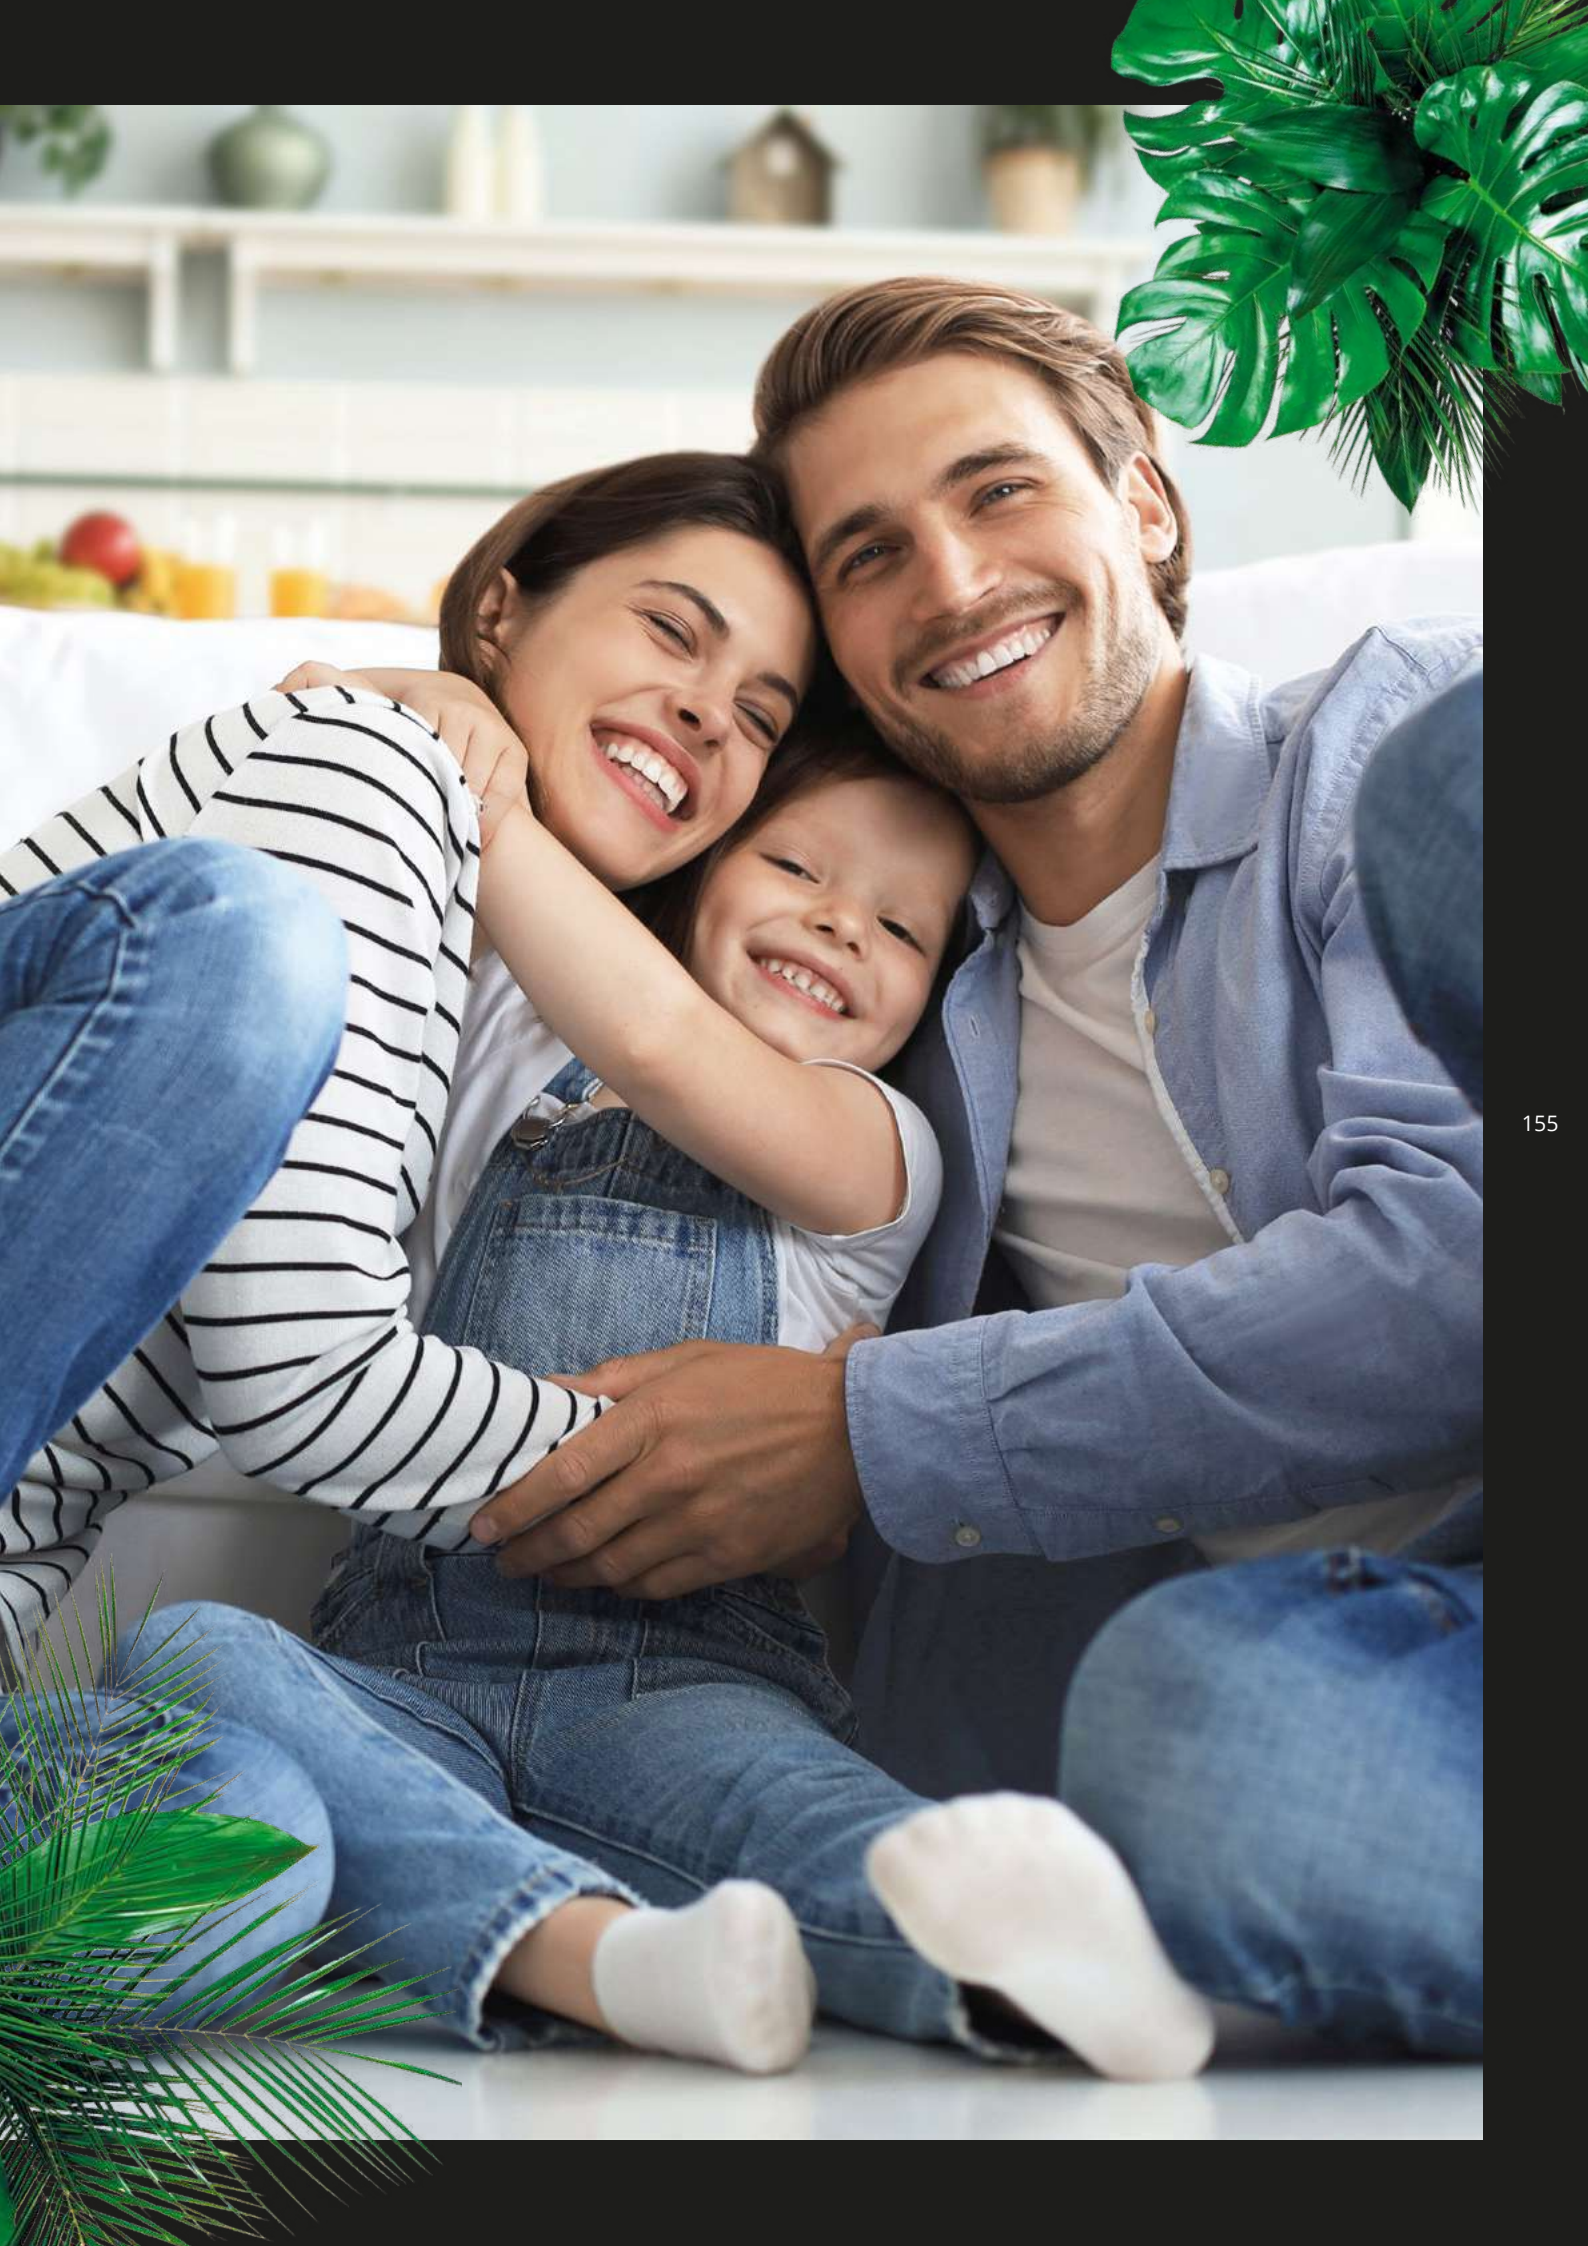

# Tank dimensions


## THERMOS STORE / STORE PLUS

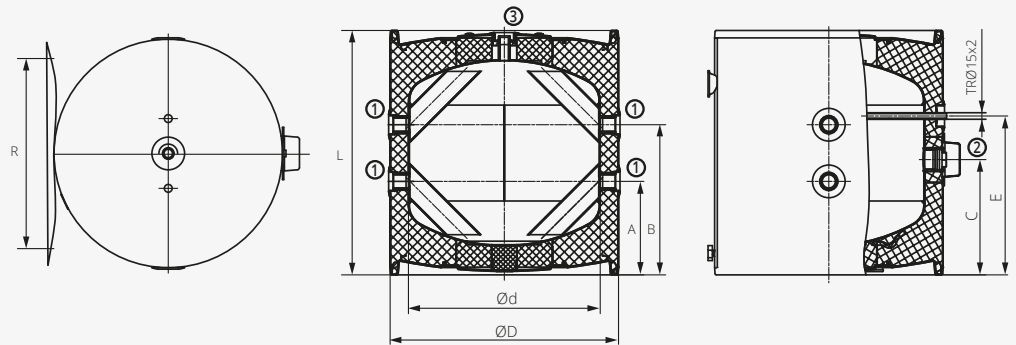

### Rotenso Thermos Store buffer tanks 50l


156

| Model     | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A   | B   | C   | d   | D   | E   | L   | R                                   | 1          | 2              | 3            | Net weight [kg] |
|-----------|----------------------------|------------|------------------------|-----|-----|-----|-----|-----|-----|-----|-------------------------------------|------------|----------------|--------------|-----------------|
| AQT50SBHA | 50 / 50                    | 561        | 524                    | 215 | 345 | 265 | 440 | 524 | 365 | 561 | 300 - 310<br>350 - 372<br>432 - 468 | G 1" inner | G 1 1/2" inner | G 1/2" inner | 25              |

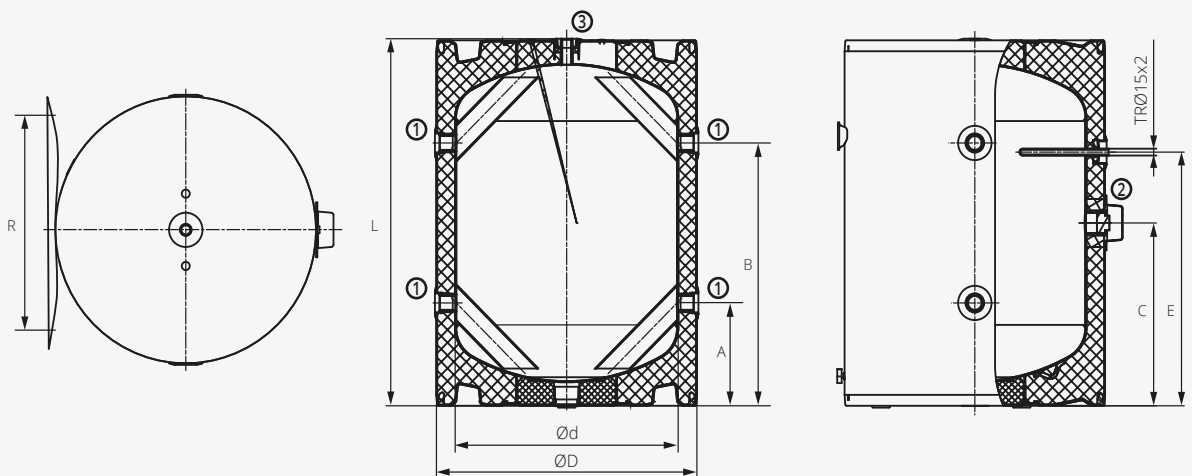

### Rotenso Thermos Store buffer tanks 100l

| Model      | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A   | B   | C   | d   | D   | E   | L   | R                                   | 1          | 2              | 3            | Net weight [kg] |
|------------|----------------------------|------------|------------------------|-----|-----|-----|-----|-----|-----|-----|-------------------------------------|------------|----------------|--------------|-----------------|
| AQT100SBHA | 120 / 100                  | 803        | 584                    | 225 | 575 | 400 | 500 | 584 | 555 | 803 | 300 - 310<br>350 - 372<br>432 - 468 | G 1" inner | G 1 1/2" inner | G 1/2" inner | 41              |

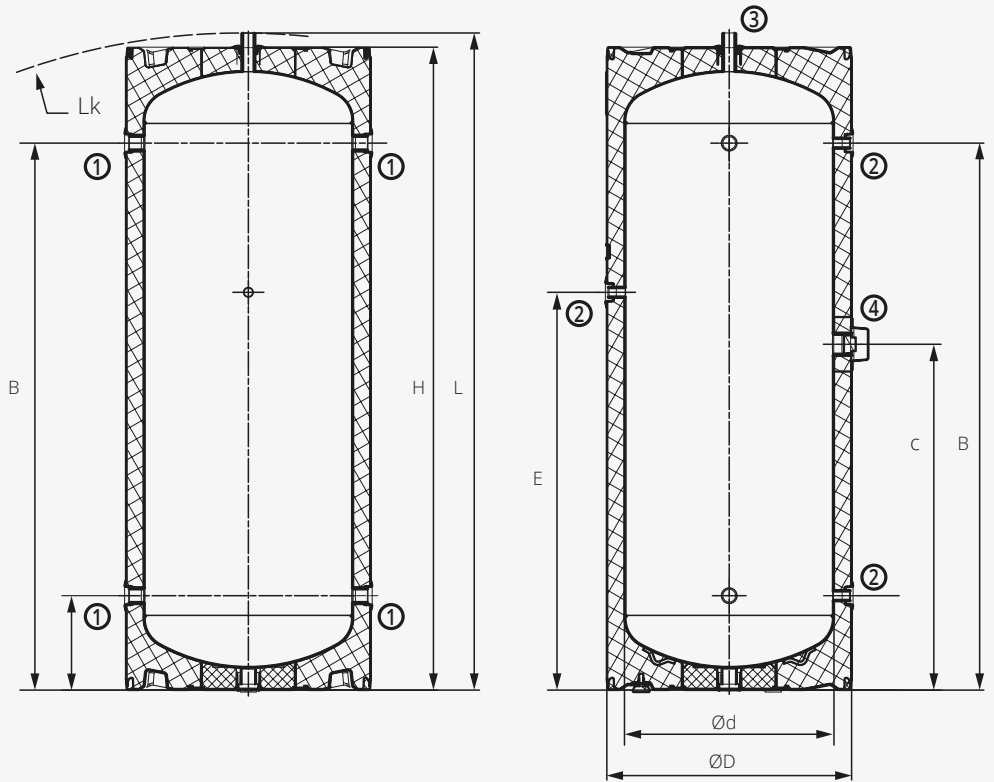

## Rotenso Thermos Store Plus DHW tanks 250l


| Model      | Volume /<br>Actual volume [l] | Heigh<br>[mm] | External<br>diameter [mm] | A   | B    | C   | d   | D   | E   | L    | H    | R                                   | Lk   | 1             | 2               | 3                | 4                 | Net weight<br>[kg] |
|------------|-------------------------------|---------------|---------------------------|-----|------|-----|-----|-----|-----|------|------|-------------------------------------|------|---------------|-----------------|------------------|-------------------|--------------------|
| AQT250SBHA | 250 / 256                     | 1568          | 584                       | 228 | 1308 | 828 | 500 | 584 | 952 | 1570 | 1541 | 300 - 310<br>350 - 372<br>432 - 468 | 1605 | G 1"<br>inner | G 1/2"<br>inner | G 1"<br>external | G 1 1/2"<br>inner | 63                 |



# Tank dimensions

## THERMOS CERAMIC


158

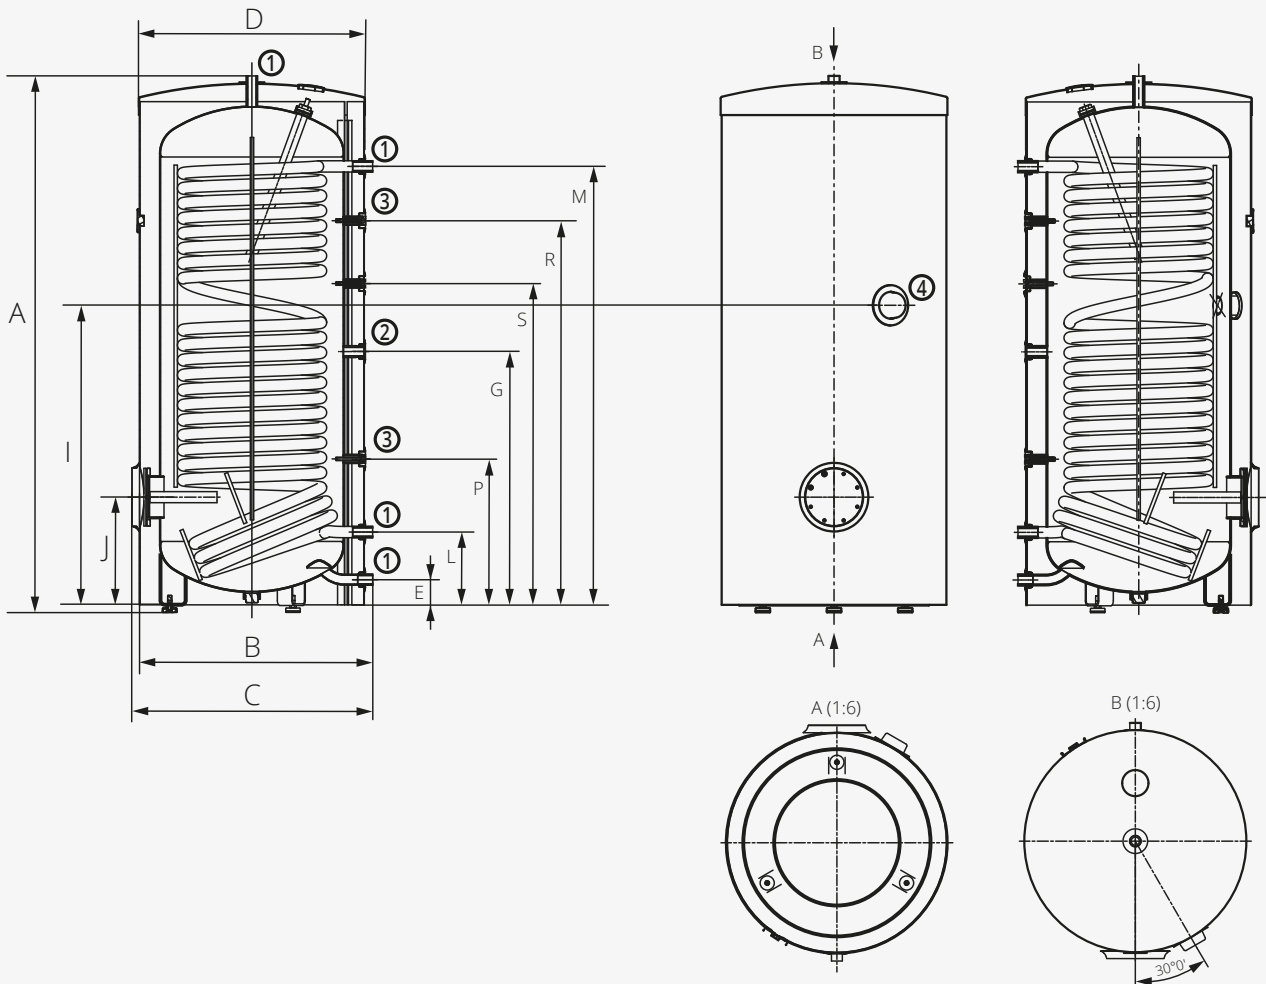

### Rotenso Thermos Ceramic DHW tanks 200-300l

| 1             | 2           | 3          | 4          |
|---------------|-------------|------------|------------|
| 3/4" external | 1" external | 3/4" inner | 6/4" inner |


| Model      | Volume / Actual volume [l] | Height [mm] | External diameter [mm] | A    | B   | C   | D   | E  | F    | G   | I   | J   | L   | M    | P   | R    | S   | Net weight [kg] |
|------------|----------------------------|-------------|------------------------|------|-----|-----|-----|----|------|-----|-----|-----|-----|------|-----|------|-----|-----------------|
| AQT200EC1A | 200 / 208                  | 1355        | 584                    | 1355 | 660 | 710 | 584 | 75 | 1275 | 855 | 805 | 255 | 205 | 1145 | 350 | 915  | 645 | 102             |
| AQT300EC1A | 286 / 300                  | 1558        | 670                    | 1558 | 750 | 775 | 670 | 77 | 1579 | 760 | 895 | 325 | 219 | 1309 | 438 | 1148 | 937 | 133             |

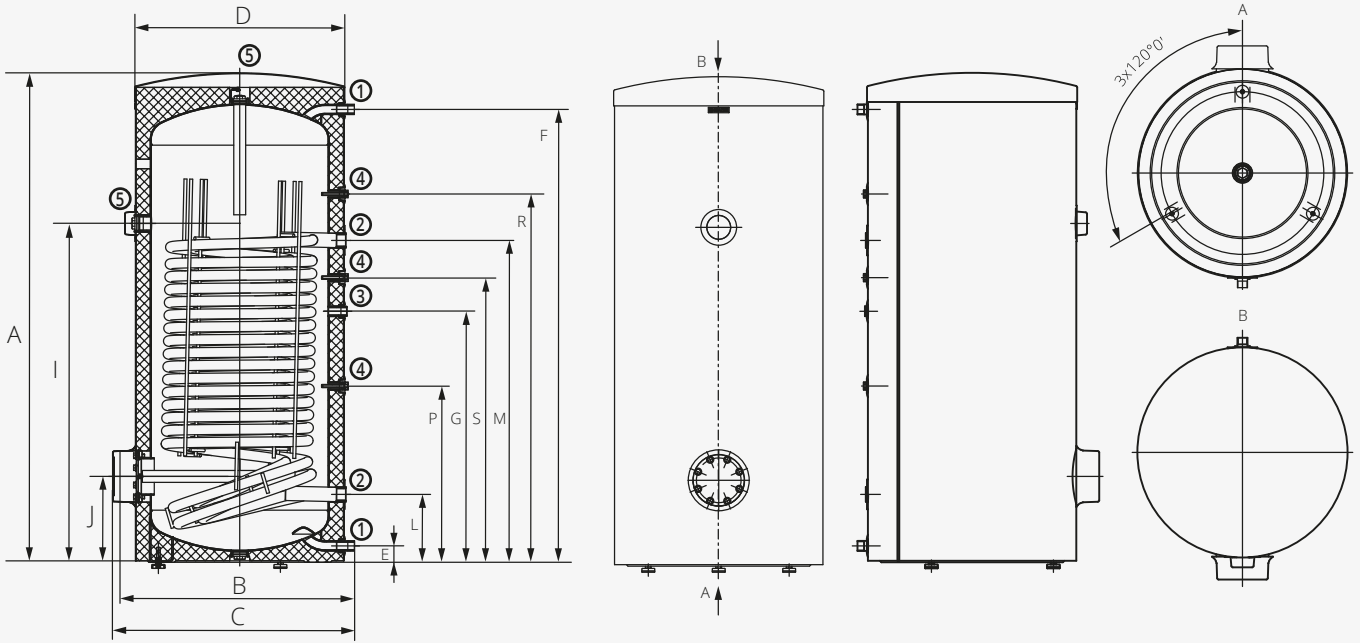

## Rotenso Thermos Ceramic DHW tanks 400l

| 1           | 2          | 3          | 4          | 5          |
|-------------|------------|------------|------------|------------|
| 1" external | 3/4" inner | 5/4" inner | 1/2" inner | 6/4" inner |

| Model      | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A    | B   | C   | D   | E  | F    | G   | I    | J   | L   | M    | P   | R    | S   | Net weight [kg] |
|------------|----------------------------|------------|------------------------|------|-----|-----|-----|----|------|-----|------|-----|-----|------|-----|------|-----|-----------------|
| AQT400EC1A | 400 / 352                  | 1644       | 700                    | 1644 | 812 | 852 | 700 | 55 | 1521 | 843 | 1138 | 288 | 228 | 1081 | 592 | 1237 | 956 | 190             |

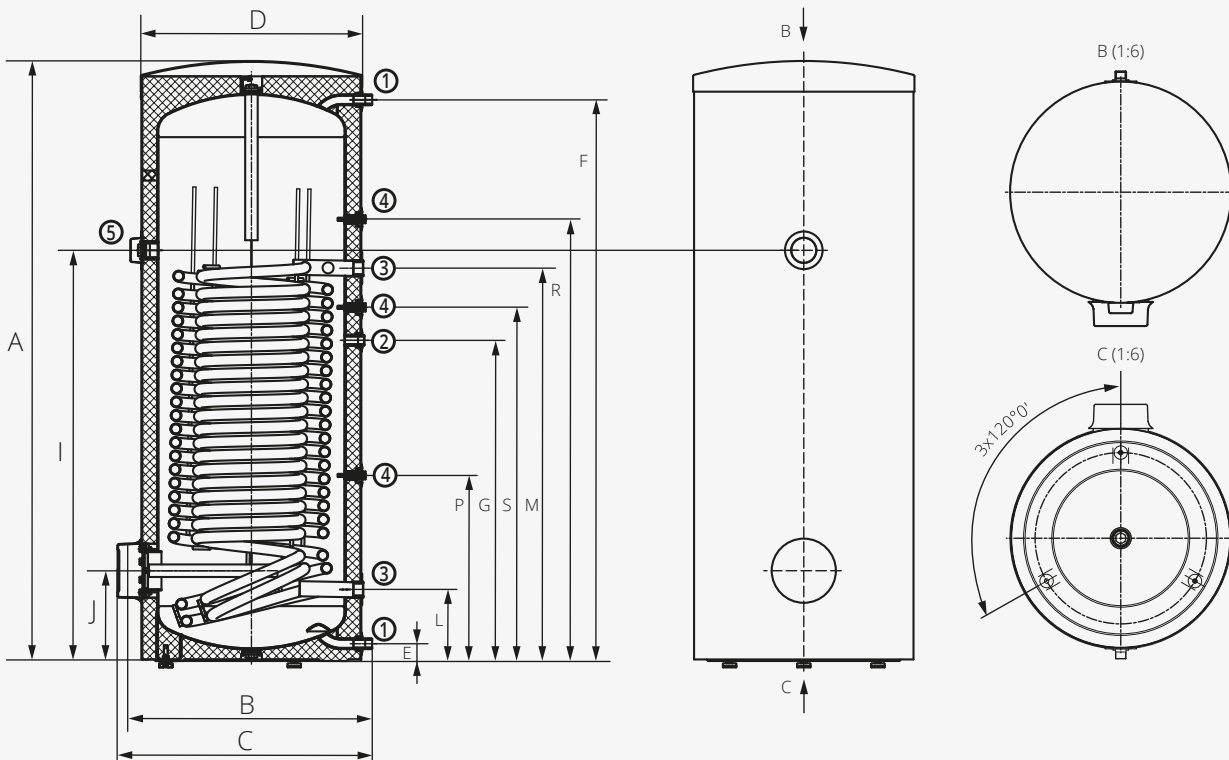

## Rotenso Thermos Ceramic DHW tanks 500l

| 1           | 2          | 3          | 4          | 5          |
|-------------|------------|------------|------------|------------|
| 1" external | 3/4" inner | 5/4" inner | 1/2" inner | 6/4" inner |

| Model      | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A    | B   | C   | D   | E  | F    | G    | I    | J   | L   | M    | P   | R    | S    | Net weight [kg] |
|------------|----------------------------|------------|------------------------|------|-----|-----|-----|----|------|------|------|-----|-----|------|-----|------|------|-----------------|
| AQT500EC1A | 500 / 469                  | 1914       | 700                    | 1914 | 812 | 852 | 700 | 55 | 1790 | 1023 | 1310 | 288 | 228 | 1253 | 592 | 1409 | 1128 | 223             |


# Tank dimensions

## THERMOS INOX

## THERMOS TWIN INOX

## THERMOS DUAL INOX



160

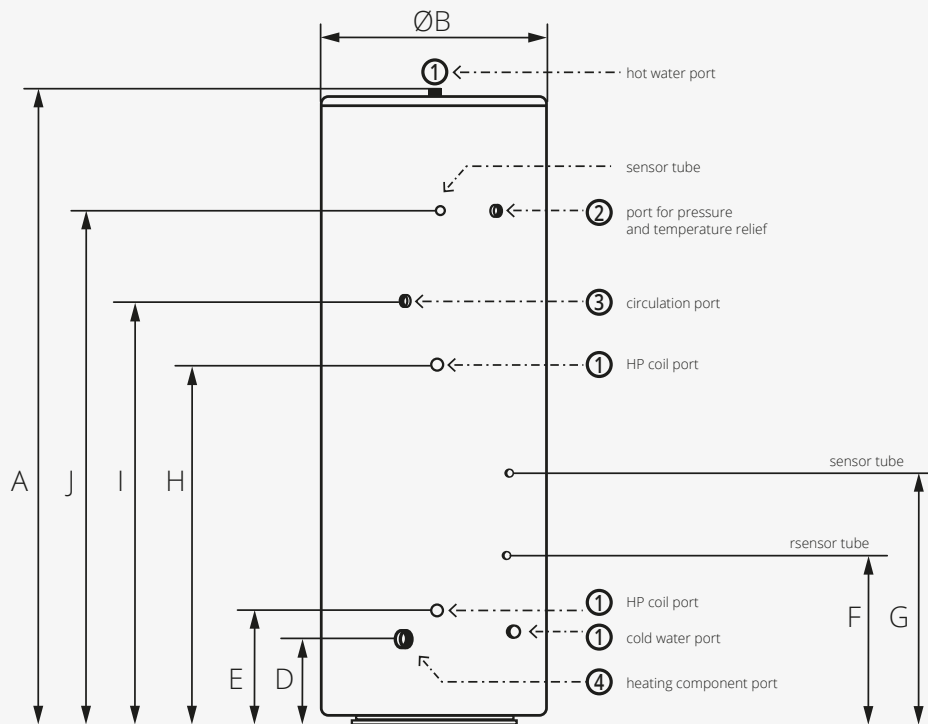

### Rotenso Thermos Inox DHW tanks 200-500l

| 1  | 2    | 3            | 4      |
|----|------|--------------|--------|
| 1" | 1/2" | 3/4"<br>1/2" | 1 3/4" |


| Model     | Volume / Actual volume [l] | Height [mm] | External diameter [mm] | A    | B   | C   | D   | E   | F   | G   | H    | I    | J    | Net weight [kg] |
|-----------|----------------------------|-------------|------------------------|------|-----|-----|-----|-----|-----|-----|------|------|------|-----------------|
| AQT200IX1 | 200 / 189                  | 1450        | 540                    | 1450 | 540 | 196 | 211 | 261 | 451 | 701 | 911  | 981  | 1211 | 58              |
| AQT300IX1 | 300 / 279                  | 1600        | 600                    | 1600 | 600 | 218 | 233 | 283 | 508 | 773 | 983  | 1153 | 1333 | 74              |
| AQT400IX1 | 400 / 380                  | 1570        | 710                    | 1570 | 710 | 225 | 240 | 290 | 540 | 805 | 1190 | 1190 | 1290 | 81              |
| AQT500IX1 | 500 / 481                  | 1930        | 710                    | 1930 | 710 | 225 | 240 | 290 | 540 | 910 | 1190 | 1190 | 1290 | 107             |

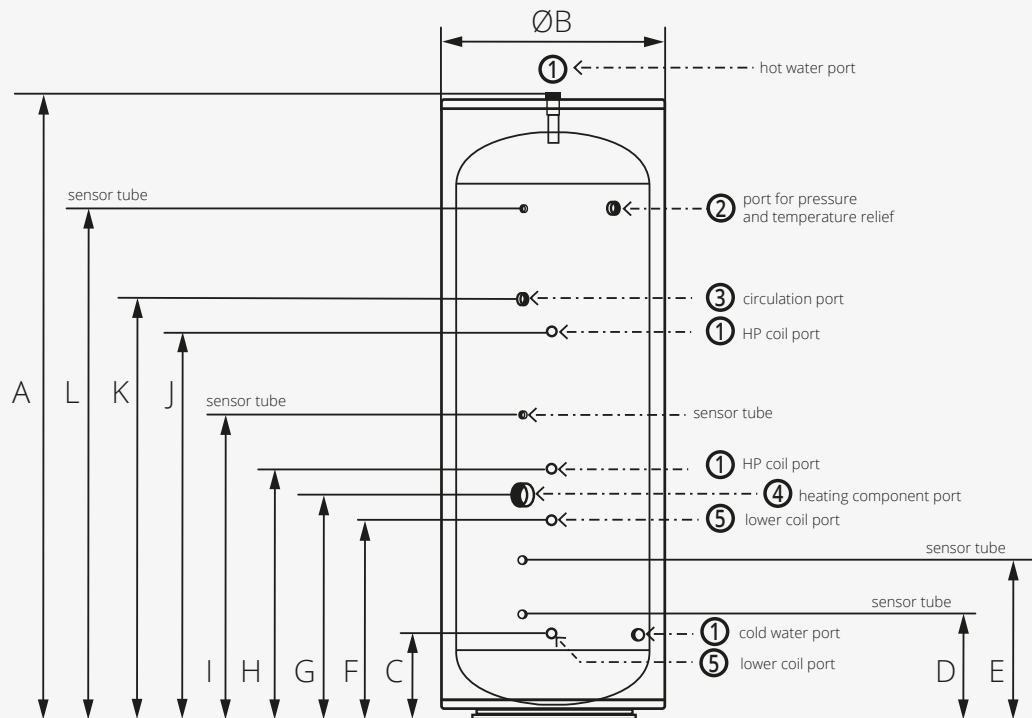

## Rotenso Thermos Dual Inox DHW tanks 200-500l

|    |      |              |        |      |
|----|------|--------------|--------|------|
| 1  | 2    | 3            | 4      | 5    |
| 1" | 1/2" | 3/4"<br>1/2" | 1 3/4" | 3/4" |

| Model     | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A    | B   | C   | D   | E   | F   | G   | H   | I   | J    | K    | L    | Net weight [kg] |
|-----------|----------------------------|------------|------------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----------------|
| AQT200IX2 | 200 / 186                  | 1450       | 540                    | 1450 | 540 | 196 | 246 | 386 | 486 | 536 | 586 | 791 | 1130 | 1136 | 1211 | 61              |
| AQT300IX2 | 300 / 277                  | 1600       | 600                    | 1600 | 600 | 218 | 268 | 438 | 538 | 578 | 628 | 813 | 1300 | 1328 | 1333 | 77              |
| AQT400IX2 | 400 / 378                  | 1570       | 710                    | 1570 | 710 | 255 | 275 | 375 | 415 | 465 | 590 | 950 | 1260 | 1285 | 1290 | 84              |
| AQT500IX2 | 500 / 478                  | 1930       | 710                    | 1930 | 710 | 255 | 275 | 430 | 615 | 675 | 735 | 950 | 1630 | 1635 | 1640 | 110             |

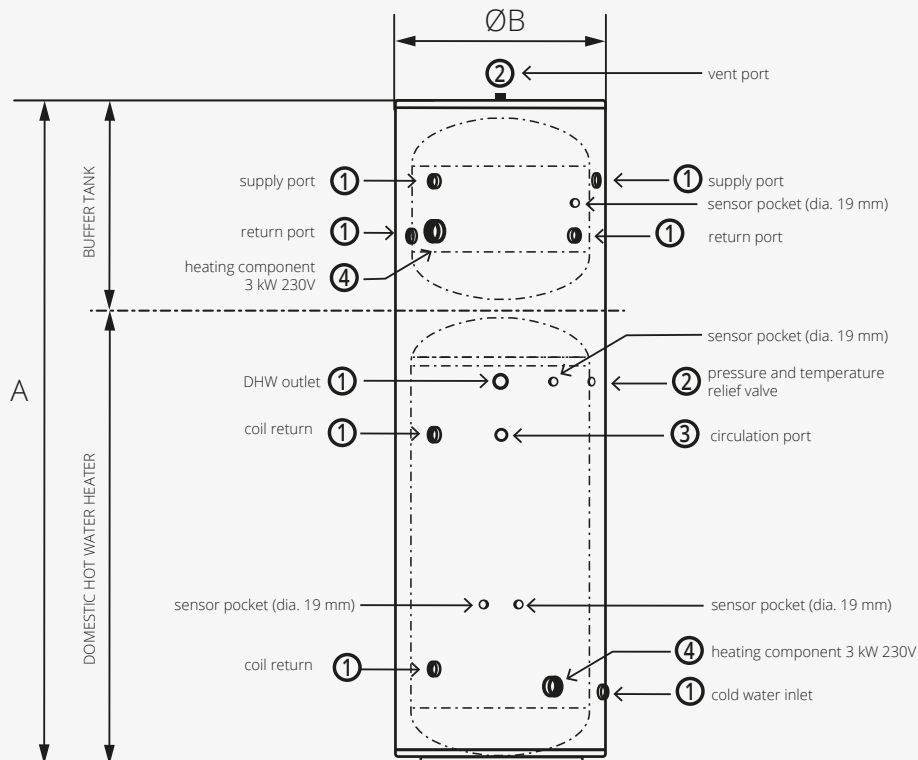

## Rotenso Thermos Twin Inox DHW tanks 200-300l

| Model          | Volume / Actual volume [l] | Heigh [mm] | External diameter [mm] | A    | B   | Net weight [kg] |
|----------------|----------------------------|------------|------------------------|------|-----|-----------------|
| AQT200 + 90IX1 | 200 + 90 / 189 + 88        | 1700       | 600                    | 1700 | 600 | 61              |
| AQT300 + 90IX1 | 300 + 90 / 279 + 88        | 2150       | 600                    | 2150 | 600 | 77              |

|    |      |              |        |
|----|------|--------------|--------|
| 1  | 2    | 3            | 4      |
| 1" | 1/2" | 3/4"<br>1/2" | 1 3/4" |



# Solutions

## Tanks

---



**Rotenso Thermos Store / Plus** tanks to store heating water and refill the hydraulic system



**Rotenso Thermos Ceramic** domestic hot water tank made of steel with ceramic enamel coating integrated with a single spiral coil.



**Rotenso Thermos Inox** Stainless steel tank to store domestic hot water.




**Rotenso Twin Inox / Dual Inox** Rotenso Twin Inox is a DHW tank combined with a 90-liter buffer tank in a single housing. Rotenso Thermos Dual Inox is a DHW tank designed to work with the heat pump combined with an additional heat source.

# Solution

## THERMOS STORE



The primary function of the buffer tank is to store heating water and to refill the hydraulic system. Buffer tank can work as a hydraulic coupling in the system if connected properly. 50 L and 250 L Rotenso Thermos Store buffer tanks are made of black steel and insulated with hard Polyurethane foam of excellent insulation properties. All of the components are enclosed in a powder-coated steel housing.

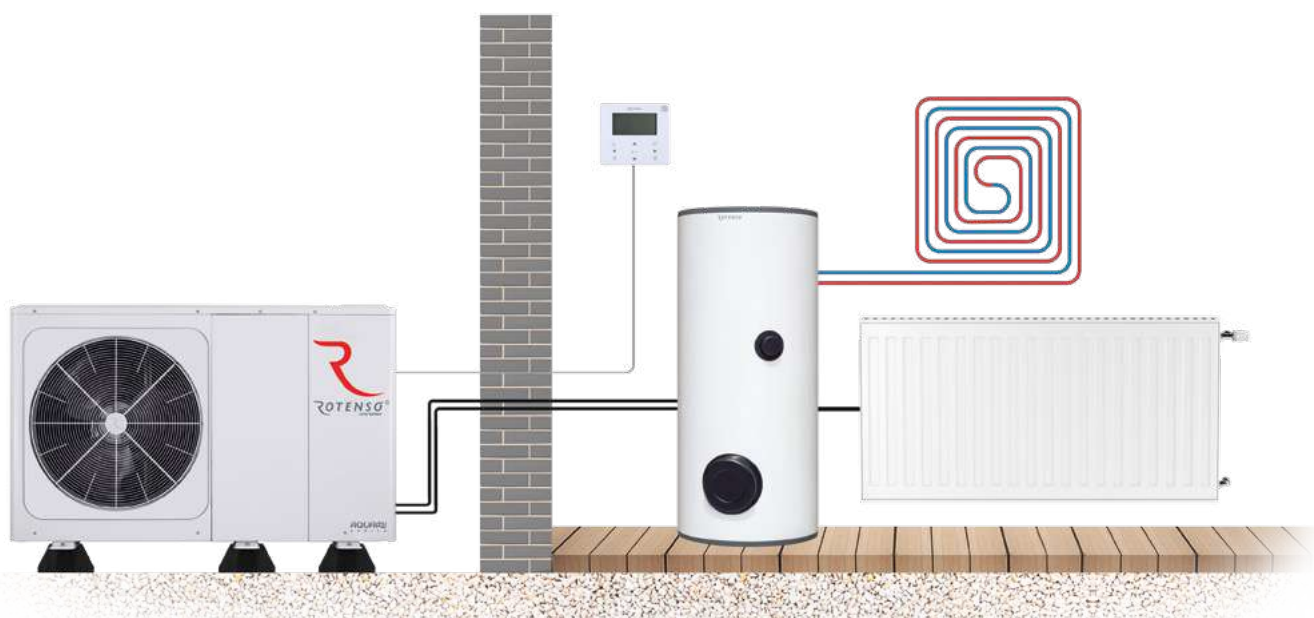



50 l



100 l



250 l

| Model                           | Rotenso Thermos STORE           |           |           |
|---------------------------------|---------------------------------|-----------|-----------|
| Capacity / Useable capacity (l) | 50 / 50                         | 100 / 120 | 250 / 265 |
| Housing material                | Polyurethane foam / black steel |           |           |
| Tank material                   | steel                           |           |           |

# Solution

## THERMOS CERAMIC

---



ERotenso's enameled DHW tanks are designed for long-term and cost-efficient operation. Intended for the preparation and storage of domestic hot water, they are designed to work with each series of the Rotenso heat pumps and more. Coils ensure a large heat exchange surface to quickly heat domestic water with minimal energy consumption. Polyurethane foam insulation provides high energy efficiency. The excellent insulation characteristics of these tanks help to reduce the energy losses during hot water storage.

Rotenso DHW tanks are made of hydraulic pressure-resistant steel with increased thickness and additional hygienic and anti-corrosion enamel coating on the inside. The high quality of nickel-free enamel combined with a magnesium anode guarantees the long life of the tanks. Tanks are equipped with inspection holes to provide easy access to remove sediment and sinches, quickly inspect the tank and perform maintenance works, which reduces overall operating costs.





200 - 500 l

| Model                          | Rotenso Thermos CERAMIC               |           |           |           |
|--------------------------------|---------------------------------------|-----------|-----------|-----------|
| Capacity / Usable capacity (l) | 200 / 208                             | 300 / 286 | 400 / 352 | 500 / 469 |
| Housing material               | Polyurethane foam, artificial leather |           |           |           |
| Tank material                  | Steel with ceramic enamel coating     |           |           |           |

# Solution

## THERMOS INOX



Tank designed to store domestic hot water. Tank body, ports and coils are made of 316 L stainless steel. As a result, they are durable and ensure long life of a tank.

There are three types of tanks available:

- Tanks with a single coil characterized by a large heat exchange surface designed for use with heat pumps;
- Tanks with a double coil, where the first coil is characterized by a large heat exchange surface designed for use with heat pumps and the other coil is designed to support alternative heat source (e.g. solar collectors, gas boiler);
- Tanks with a single coil characterized by a large heat exchange surface combined with a 90-liter buffer tank in a single housing.





Thermos INOX 200 - 500 l

| Model                          | Rotenso Thermos INOX |           |           |           |
|--------------------------------|----------------------|-----------|-----------|-----------|
| Capacity / Usable capacity (l) | 200 / 189            | 300 / 279 | 400 / 380 | 500 / 481 |
| Housing material               | Steel                |           |           |           |
| Tank material                  | Stainless steel      |           |           |           |

## Solution

# THERMOS TWIN INOX / DUAL INOX

INOX  
TANK

Rotenso Thermos Twin Inox is a domestic hot water tank equipped with a large surface coil and a 90-liter buffer tank combined in a single housing. It has a 3 kW electric heater and a pressure relief valve. The housing is made of stainless steel.

Rotenso Thermos Dual Inox is a domestic hot water tank equipped with a large surface coil designed to work with heat pumps and additional heat source. It is provided with the second coil to connect additional heat source, e.g. solar collectors or solid fuel boiler. It also has a 3 kW electric heater and a pressure relief valve. Tank body is made of stainless steel and insulated with hard and dense Polyurethane foam.





TWIN INOX 200+90 l / 300+90 l



DUAL INOX 200-500 l

| Model               | Rotenso Thermos TWIN INOX |          | Rotenso Thermos DUAL INOX |     |     |     |
|---------------------|---------------------------|----------|---------------------------|-----|-----|-----|
| Capacity (l)        | 200 + 90                  | 300 + 90 | 200                       | 300 | 400 | 500 |
| Usable capacity (l) | 189 + 88                  | 279 + 88 | 186                       | 277 | 378 | 479 |
| Housing material    | Steel                     |          |                           |     |     |     |
| Tank material       | Stainless steel           |          |                           |     |     |     |



## Buffer tanks

---

**50 L and 250 L Rotenso Thermos Store buffer tanks are made of black steel and insulated with hard Polyurethane foam (42 mm thick) of excellent insulation properties. All of the components are enclosed in a powder-coated steel housing.**

Designed for use in heating and cooling systems as a hydraulic coupling, Thermos Store buffer tanks are used to store excess energy generated by the associated heat source.

Heat accumulation feature of the buffer tanks integrated into the heating system increases the efficiency, and at the same time, the life of the associated heat source, such as air-to-water heat pump, by increasing the water system's charge accordingly.

By ensuring the right amount of water in the system the heat buffer in heat pump systems also contributes to smooth operation of the heat pump, because heat accumulation reduces pump cycling to minimum to protect the heart of the entire cooling system – the compressor.



# BUFFER TANKS



5-year  
warranty



Energy efficiency  
class B/C



Stable and efficient  
heat pump  
operation





174


## Stable and efficient **heat pump operation**

Buffer tank contributes in efficient and stable operation of the heat pump. It also ensures that stored heating water is used at the right time.



### **5-year warranty**

Choose proven and reliable solutions. The tank is made of black steel insulated with Polyurethane foam and comes with a 5-year warranty.

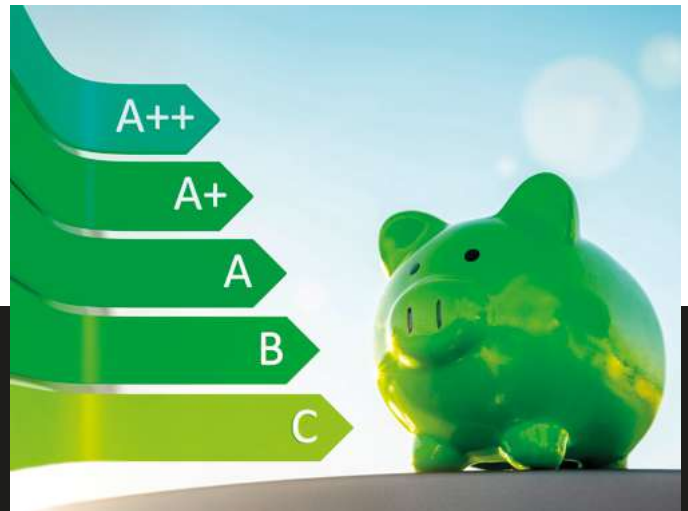

### **Energy efficiency class B/C**

The excellent insulating properties of 42 mm thick polyurethane hard foam layer guarantee high energy efficiency.

# Thermos Store

50 - 250 l

ENERGY  
EFFICIENCY  
CLASS  
**B/C**

**CE**

**5-YEAR  
WARRANTY**



## Technical specification

175

| Model                               |                            | AQT50SBHA                       | AQT100SBHA    | AQT250SBSA    |
|-------------------------------------|----------------------------|---------------------------------|---------------|---------------|
| EAN product code                    |                            | 5905567602894                   | 5905567602900 | 5905567602917 |
| Tank                                | Capacity (class)           | I                               | 50            | 100           |
|                                     | Colour                     | White                           | White         | White         |
|                                     | Tank material              | Polyurethane foam / black steel |               |               |
|                                     | Housing material           | Steel                           |               |               |
|                                     | Maximum pressure           | bar                             | 3             | 3             |
|                                     | Insulation thickness       | mm                              | 42            | 42            |
|                                     | Maximum temperature        | °C                              | 90            | 90            |
|                                     | Height                     | mm                              | 561           | 803           |
|                                     | External diameter          | mm                              | 524           | 584           |
| Net weight / Gross weight           | kg                         | 25 / 31,62                      | 41 / 55,3     | 63 / 85,3     |
| Hydraulic connections               | Heat pump input            | thread inches                   | 1" x 2        | 1" x 2        |
|                                     | Heat pump output           | thread inches                   | 1" x 2        | 1" x 2        |
|                                     | Heater connection          | thread inches                   | 1 1/2"        | 1 1/2"        |
|                                     | Upper connector - bleeding | thread inches                   | 1"            | 1"            |
|                                     | Sensor connection          | thread inches                   | Ø15           | Ø15           |
|                                     | Water drain                | thread inches                   | -             | -             |
| Warranty                            | Tank                       | years                           | 5             | 5             |
| Energy efficiency class             |                            | B                               | B             | C             |
| Maintenance                         |                            | Not required                    |               |               |
| Static heat loss                    | W                          | 31                              | 41            | 88            |
| <b>Optional accessories / model</b> |                            | <b>AGGE013</b>                  |               |               |
| EAN product code                    |                            | 5905567603266                   |               |               |
| Product name                        |                            | Electric heater                 |               |               |
| Power                               | kW                         | 3                               |               |               |
| Dimension                           | mm / inches / screw        | 6 / 4" / -                      |               |               |



## Domestic hot water tanks

---

**Rotenso's enameled DHW tanks are designed for long-term and cost-efficient operation. Intended for preparation and storage of domestic hot water, they are designed to work with each series of the Rotenso heat pumps.**

Coils ensure a large heat exchange surface to quickly heat domestic water with minimal energy consumption. Polyurethane foam insulation provides high energy efficiency.

The excellent insulation characteristics of these tanks help to reduce losses during hot water storage. Rotenso DHW tanks are made of hydraulic pressure-resistant steel with increased thickness and additional hygienic and anti-corrosion enamel coating on the inside.

The high quality of nickel-free enamel combined with a magnesium anode guarantees long life of the tanks.

Tanks are equipped with inspection holes to provide easy access to remove sediment and slimes, quickly inspect the tank and perform maintenance works, which reduces overall operating costs.



# DHW TANKS



Crystal Enamel  
coating



Steel with ceramic  
enamel coating,  
5-year warranty



Stainless  
steel



Stainless steel,  
12-year warranty





## Coating **Crystal Enamel or Stainless steel**

The inner surface of the Thermos Ceramic tank is made of a steel with anti-corrosion and hygienic enamel coating to ensure tank durability and high water quality.

The body of the Thermos Inox tank is made of stainless steel, while ports and coils are made of 316L stainless steel. Hard, dense Polyurethane foam is used as tank insulation.

CRYSTAL ENAMEL  
**5-year  
warranty**

INOX ENAMEL  
**12-year  
warranty**

### **5-year / 12-year warranty**

The highest quality components and solutions guarantee many years of trouble-free operation. Rotenso Thermos Ceramic tanks come with a five-year warranty.

Rotenso Thermos Inox / Twin Inox and Dual Inox tanks come with twelve-year warranty.

# Thermos Ceramic

200 - 300 l



## Technical specification

| Model                               |                             | AQT200EC1A   |                          | AQT300EC1A                          |                  |  |
|-------------------------------------|-----------------------------|--|--------------------------|-------------------------------------|------------------|--|
| EAN product code                    |                             | 5905567607097  |                          | 5905567602931                       |                  |  |
| Tank                                | Capacity (class)            | I  |                          | 200                                 |                  |  |
|                                     | Colour                      | White  |                          | White                               |                  |  |
|                                     | Tank material               | Ceramic enamel steel                                 |                          | Ceramic enamel steel                |                  |  |
|                                     | Housing material            | Polyurethane foam, plastic material                  |                          | Polyurethane foam, plastic material |                  |  |
|                                     | Maximum pressure            | bar  | 10                       |                                     | 10               |  |
|                                     | Insulation thickness        | mm   | 42                       |                                     | 60               |  |
|                                     | Maximum temperature         | °C   | 80                       |                                     | 80               |  |
|                                     | Height                      | mm   | 1355                     |                                     | 1558             |  |
|                                     | Outer diameter              | mm   | 584                      |                                     | 670              |  |
|                                     | Net weight / gross weight   | kg   | 102 / 116,3              |                                     | 133 / 153        |  |
| Integrated electric heater          | Power                       | kW   |                          | -                                   |                  |  |
|                                     | Power supply                | V, Hz, Ø   |                          | -                                   |                  |  |
| Magnesium anode                     | Upper / Bottom              | inches/screw   |                          | 5/4" / - x1                         |                  |  |
|                                     | Type                        | Single coil  |                          | Single coil                         |                  |  |
| Heat exchanger                      | Material                    | Ceramic enamel steel                                 |                          | Ceramic enamel steel                |                  |  |
|                                     | Maximum pressure            | bar  | 10                       |                                     | 10               |  |
|                                     | Maximum temperature         | °C   | 110                      |                                     | 110              |  |
|                                     | Heat pump tank coil surface | m²   | 2                        |                                     | 2,9              |  |
|                                     | Power (50/10/45°C)          | kW   | 17                       |                                     | 25               |  |
|                                     | Power (60/10/45°C)          | kW   | -                        |                                     | -                |  |
|                                     | Solar coil surface          | m²   | -                        |                                     | -                |  |
|                                     | Power (80/10/45°C)          | kW   | -                        |                                     | -                |  |
|                                     | Capacity                    | l/h  | 822                      |                                     | 1260             |  |
| Hydraulic connections               | Heat pump input             | thread inches  | 1"                       |                                     | 1"               |  |
|                                     | Heat pump output            | thread inches  | 1"                       |                                     | 1"               |  |
|                                     | DHW output                  | thread inches  | 3/4"                     |                                     | 1"               |  |
|                                     | Cold water input            | thread inches  | 3/4"                     |                                     | 1"               |  |
|                                     | Temp.-pressure valve        | thread inches  | -                        |                                     | -                |  |
|                                     | Circulation / return        | thread inches  | 3/4"                     |                                     | 3/4"             |  |
|                                     | Heater connection           | thread inches  | 6/4"                     |                                     | 6/4"             |  |
|                                     | Solar system input          | thread inches  | -                        |                                     | -                |  |
|                                     | Solar system output         | thread inches  | -                        |                                     | -                |  |
| Warranty                            | Tank                        | years  | 5                        |                                     | 5                |  |
|                                     | Heater and safety valve     | years  | 2                        |                                     | 2                |  |
| Energy efficiency class             |                             | C  |                          | C                                   |                  |  |
| Maintenance                         |                             | Service and anode exchange obligatory every 2 years. |                          |                                     |                  |  |
| Static heat loss                    |                             | W  | 82                       |                                     | 72               |  |
| <b>Optional accessories / model</b> |                             | <b>AGGE013</b>                                       | <b>AMD33/200A</b>        | <b>AMG33/450A</b>                   |                  |  |
| EAN product code                    |                             | 5905567603266  | 5905567614255            | 5905567614262                       |                  |  |
| Product name                        |                             | Electric heater                                      | Magnesium anode - bottom | Magnesium anode - upper             |                  |  |
| Power                               |                             | kW   | 3                        |                                     | -                |  |
| Dimensions                          |                             | mm / inches / screw                                  | 6 / 4" / -               |                                     | 33 × 200 / - / - |  |
|                                     |                             |  |                          |                                     | 33 × 450 / - / - |  |

# Thermos Inox

200 - 500 l



## 180 Technical specification

| Model                      |                             |               | AQT200IX1                          | AQT300IX1       | AQT400IX1       | AQT500IX1       |
|----------------------------|-----------------------------|---------------|------------------------------------|-----------------|-----------------|-----------------|
| EAN product code           |                             |               | 5905567602948                      | 5905567602955   | 5905567602962   | 5905567602979   |
| Tank                       | Capacity (class)            | l             | 200                                | 300             | 400             | 500             |
|                            | Colour                      |               | White                              | White           | White           | White           |
|                            | Tank material               |               | Stainless steel                    | Stainless steel | Stainless steel | Stainless steel |
|                            | Housing material            |               | Steel                              | Steel           | Steel           | Steel           |
|                            | Maximum pressure            | bar           | 6                                  | 6               | 6               | 6               |
|                            | Insulation thickness        | mm            | 40                                 | 40              | 50              | 50              |
|                            | Maximum temperature         | °C            | 85                                 | 85              | 85              | 85              |
|                            | Height                      | mm            | 1450                               | 1600            | 1570            | 1930            |
|                            | External diameter           | mm            | 540                                | 600             | 710             | 710             |
|                            | Net weight / Gross weight   | kg            | 58 / 65,5                          | 74 / 84,4       | 81 / 97         | 107 / 123       |
| Integrated electric heater | Power                       | kW            | 3                                  | 3               | 3               | 3               |
|                            | Power supply                | V-Hz, Ø       | 220-240 -50, 1f                    | 220-240 -50, 1f | 220-240 -50, 1f | 220-240 -50, 1f |
| Magnesium anode            | Upper / Bottom              | inches/screw  | -                                  | -               | -               | -               |
|                            | Type                        |               | Single coil                        | Single coil     | Single coil     | Single coil     |
| Heat exchanger             | Material                    |               | Stainless steel                    | Stainless steel | Stainless steel | Stainless steel |
|                            | Maximum pressure            | bar           | 10                                 | 10              | 10              | 10              |
|                            | Maximum temperature         | °C            | 95                                 | 95              | 95              | 95              |
|                            | Heat pump tank coil surface | m²            | 2,5                                | 3,2             | 3,2             | 4               |
|                            | Power (50/10/45°C)          | kW            | -                                  | -               | -               | -               |
|                            | Power (60/10/45°C)          | kW            | 37,5                               | 48,1            | 48,1            | 60,1            |
|                            | Solar coil surface          | m²            | -                                  | -               | -               | -               |
|                            | Power (80/10/45°C)          | kW            | -                                  | -               | -               | -               |
| Capacity                   | l/h                         | 922,6         | 1180,9                             | 1180,9          | 1476,1          |                 |
| Hydraulic connections      | Heat pump input             | thread inches | 1"                                 | 1"              | 1"              | 1"              |
|                            | Heat pump output            | thread inches | 1"                                 | 1"              | 1"              | 1"              |
|                            | DHW output                  | thread inches | 1"                                 | 1"              | 1"              | 1"              |
|                            | Cold water input            | thread inches | 1"                                 | 1"              | 1"              | 1"              |
|                            | Temp.-pressure valve        | thread inches | 1/2"                               | 1/2"            | 1/2"            | 1/2"            |
|                            | Circulation / return        | thread inches | 3/4"                               | 3/4"            | 3/4"            | 3/4"            |
|                            | Heater connection           | thread inches | 1 3/4"                             | 1 3/4"          | 1 3/4"          | 1 3/4"          |
|                            | Solar system input          | thread inches | -                                  | -               | -               | -               |
|                            | Solar system output         | thread inches | -                                  | -               | -               | -               |
|                            | Warranty                    | Tank          | years                              | 12              | 12              | 12              |
| Heater and safety valve    |                             |               | 1                                  | 1               | 1               | 1               |
| Energy efficiency class    |                             |               | C                                  | C               | C               | C               |
| Maintenance                |                             |               | Obligatory service after 12 months |                 |                 |                 |
| Static heat loss           |                             | W             | 81                                 | 92              | 102             | 115             |

# Thermos Dual Inox / Twin Inox

200 - 500 l



## Technical specification

| Model                      |                             |               | AQT200IX2                          | AQT300IX2       | AQT400IX2       | AQT500IX2       | AQT200+90IX1                       | AQT300+90IX1    |
|----------------------------|-----------------------------|---------------|------------------------------------|-----------------|-----------------|-----------------|------------------------------------|-----------------|
| EAN product code           |                             |               | 5905567602986                      | 5905567602993   | 5905567603006   | 5905567603013   | 5905567603020                      | 5905567603037   |
| Tank                       | Capacity (class)            | l             | 200                                | 300             | 400             | 500             | 200 + 90                           | 300 + 90        |
|                            | Colour                      |               | White                              | White           | White           | White           | White                              | White           |
|                            | Tank material               |               | Stainless steel                    | Stainless steel | Stainless steel | Stainless steel | Stainless steel                    | Stainless steel |
|                            | Housing material            |               | Steel                              | Steel           | Steel           | Steel           | Steel                              | Steel           |
|                            | Maximum pressure            | bar           | 6                                  | 6               | 6               | 6               | 6                                  | 6               |
|                            | Insulation thickness        | mm            | 40                                 | 40              | 50              | 50              | 40                                 | 40              |
|                            | Maximum temperature         | °C            | 85                                 | 85              | 85              | 85              | 85                                 | 85              |
|                            | Height                      | mm            | 1450                               | 1600            | 1570            | 1930            | 1700                               | 2150            |
|                            | External diameter           | mm            | 540                                | 600             | 710             | 710             | 600                                | 600             |
|                            | Net weight / Gross weight   | kg            | 61 / 68,5                          | 77 / 87,4       | 84 / 100        | 109 / 125       | 85 / 95,4                          | 102 / 112,4     |
| Integrated electric heater | Power                       | kW            | 3                                  | 3               | 3               | 3               | 2 x 3                              | 2 x 3           |
|                            | Power supply                | V-Hz, Ø       | 220-240 ~50, 1f                    | 220-240 ~50, 1f | 220-240 ~50, 1f | 220-240 ~50, 1f | 220-240 ~50, 1f                    | 220-240 ~50, 1f |
| Magnesium anode            | Upper / Bottom              | inches/screw  | -                                  | -               | -               | -               | -                                  | -               |
|                            | Type                        |               | Double coil                        | Double coil     | Double coil     | Double coil     | Single coil                        | Single coil     |
| Heat exchanger             | Material                    |               | Stainless steel                    | Stainless steel | Stainless steel | Stainless steel | Stainless steel                    | Stainless steel |
|                            | Maximum pressure            | bar           | 10                                 | 10              | 10              | 10              | 10                                 | 10              |
|                            | Maximum temperature         | °C            | 95                                 | 95              | 95              | 95              | 95                                 | 95              |
|                            | Heat pump tank coil surface | m²            | 2,5                                | 3,2             | 3,2             | 4               | 2,5                                | 3               |
|                            | Power (50/10/45°C)          | kW            | -                                  | -               | -               | -               | -                                  | -               |
|                            | Power (60/10/45°C)          | kW            | 37,5                               | 48,1            | 48,1            | 60,1            | 37,5                               | 47,6            |
|                            | Solar coil surface          | m²            | 0,7                                | 1,1             | 1,1             | 1,2             | -                                  | -               |
|                            | Power (80/10/45°C)          | kW            | 17,9                               | 29              | 29              | 30,6            | -                                  | -               |
| Capacity                   | l/h                         | 922,6         | 1180,9                             | 1180,9          | 1476,1          | 923             | 1140                               |                 |
| Hydraulic connections      | Heat pump input             | thread inches | 1"                                 | 1"              | 1"              | 1"              | 1"                                 | 1"              |
|                            | Heat pump output            | thread inches | 1"                                 | 1"              | 1"              | 1"              | 1"                                 | 1"              |
|                            | DHW output                  | thread inches | 1"                                 | 1"              | 1"              | 1"              | 1"                                 | 1"              |
|                            | Cold water input            | thread inches | 1"                                 | 1"              | 1"              | 1"              | 1"                                 | 1"              |
|                            | Temp.-pressure valve        | thread inches | 1/2"                               | 1/2"            | 1/2"            | 1/2"            | 1/2"                               | 1/2"            |
|                            | Circulation / return        | thread inches | 3/4"                               | 3/4"            | 3/4"            | 3/4"            | 3/4"                               | 3/4"            |
|                            | Heater connection           | thread inches | 1 3/4"                             | 1 3/4"          | 1 3/4"          | 1 3/4"          | 1 3/4"                             | 1 3/4"          |
|                            | Solar system input          | thread inches | 3/4"                               | 3/4"            | 3/4"            | 3/4"            | -                                  | -               |
|                            | Solar system output         | thread inches | 3/4"                               | 3/4"            | 3/4"            | 3/4"            | -                                  | -               |
|                            | Warranty                    | Tank          | years                              | 12              | 12              | 12              | 12                                 | 12              |
| Heater and safety valve    |                             |               | 1                                  | 1               | 1               | 1               | 1                                  | 1               |
| Energy efficiency class    |                             |               | C                                  | C               | C               | C               | C                                  | C               |
| Maintenance                |                             |               | Obligatory service after 12 months |                 |                 |                 | Obligatory service after 12 months |                 |
| Static heat loss           |                             | W             | 81                                 | 92              | 102             | 115             | 77                                 | 94              |

# WE ARE FUTURE




182

Heat pumps equipment  
and accessories

**Rotenso**

---



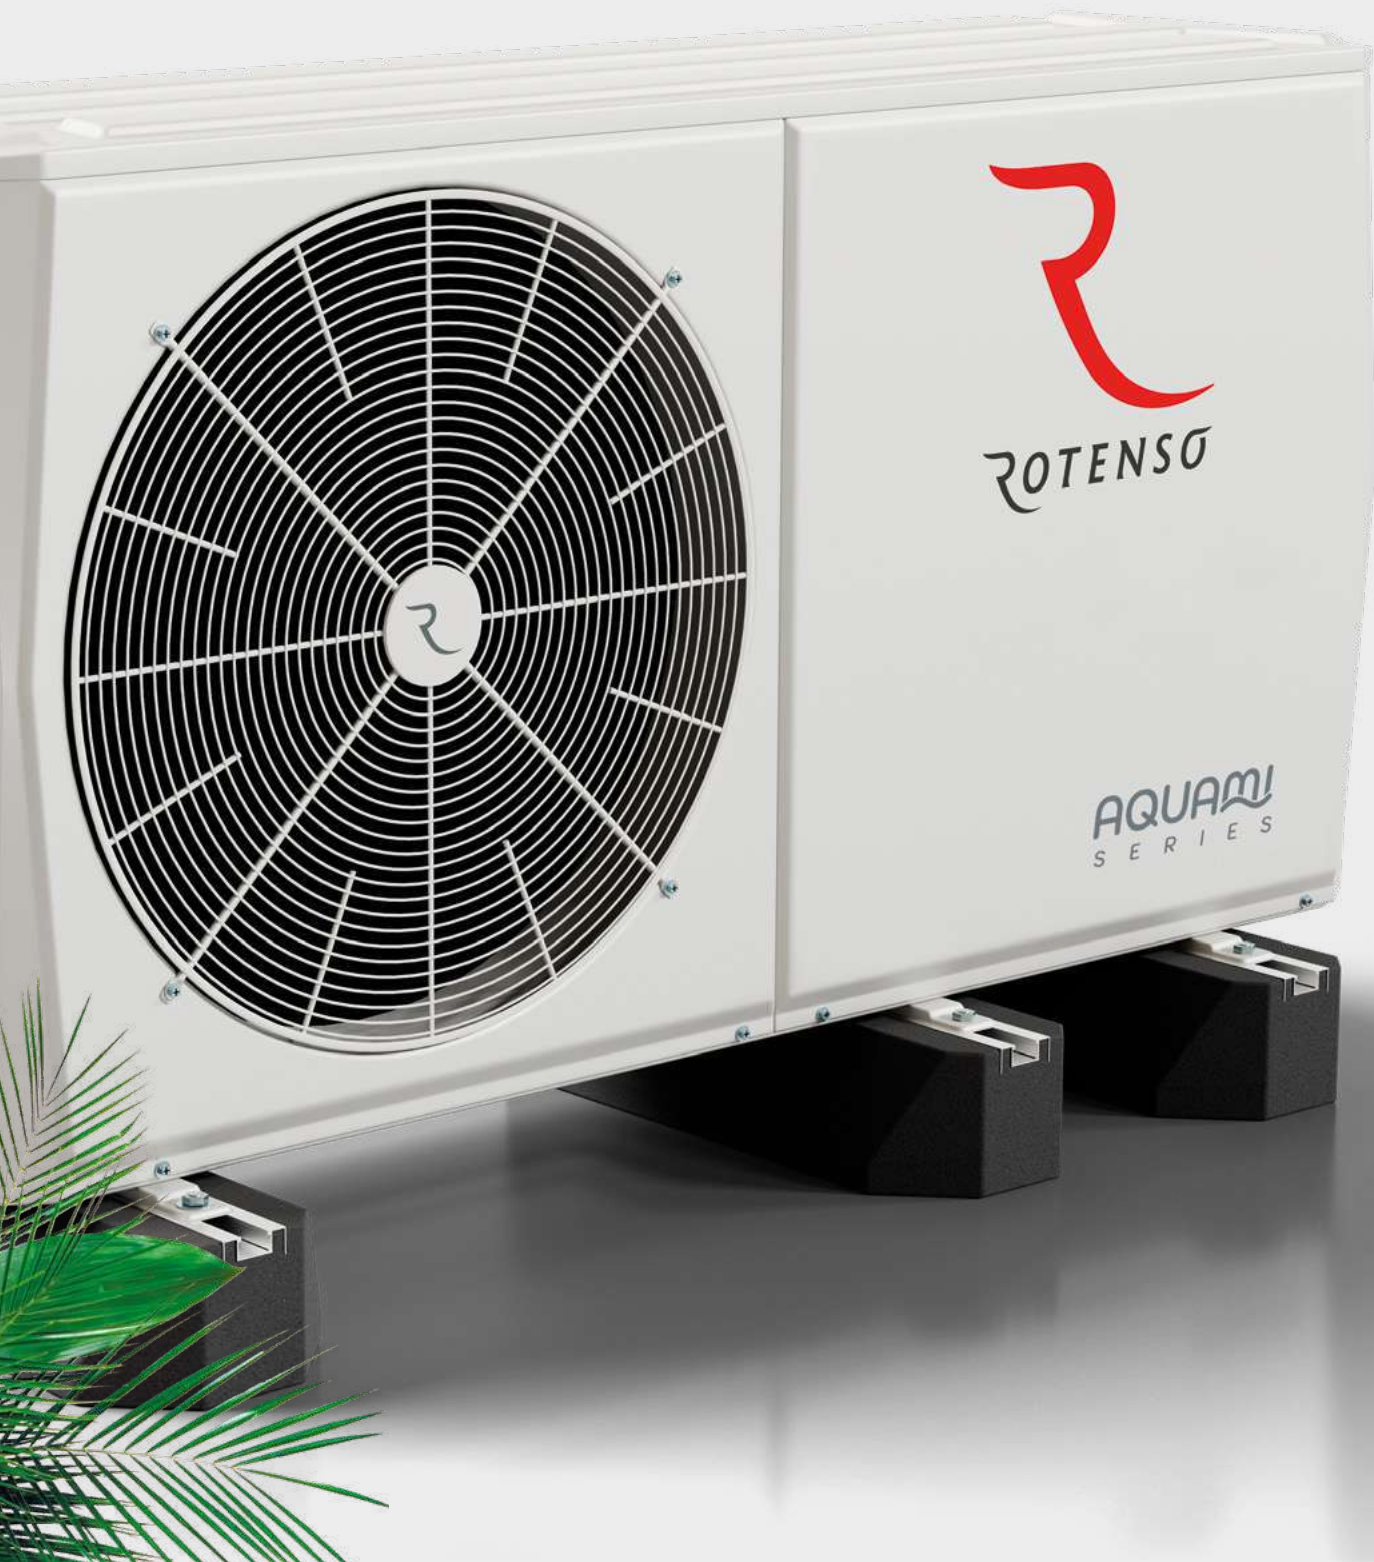

# Wired controllers



| Symbol  | RENI S         | RENI M             | NOKA                 |
|---|----------------|--------------------|----------------------|
| EAN code  | 5905567603372  | 5905567603365      | 5905567603358        |
| Series  | AQUAMI (Split) | AQUAMI (Monoblock) | AQUAMI (Multi Split) |
| - Touchscreen controller                                  |                |                    |                      |
| - LCD display   | •              | •                  | •                    |
| - Checking the heat pump operational status               | •              | •                  | •                    |
| - Checking the operation mode                             | •              | •                  | •                    |
| - Adjustable temperature and operation mode               | •              | •                  | •                    |
| - Adjustable water temperature                            | •              | •                  | •                    |
| - Adjustable air temperature                              | •              | •                  | •                    |
| - Silent mode   | •              | •                  | •                    |
| - Vacation mode   | •              | •                  | •                    |
| - Home vacation mode                                      | •              | •                  | •                    |
| - Eco mode  | •              | •                  | •                    |
| - Configurable daily schedules                            | •              | •                  | •                    |
| - Configurable weekly schedules                           | •              | •                  | •                    |
| - Timer   | •              | •                  | •                    |
| - Climate curves  | •              | •                  | •                    |
| - Second temperature control zone to enable               | •              | •                  | •                    |
| - System status tracking                                  | •              | •                  | •                    |
| - Energy consumption tracking                             | •              | •                  | •                    |
| - Energy-saving tips                                      | •              | •                  | •                    |
| - Remote control  | •              | •                  | •                    |
| - Error codes display                                     | •              | •                  | •                    |
| - Checking the operating parameters                       | •              | •                  | •                    |
| - Parental lock   | •              | •                  | •                    |
| - Screen lock   |                |                    |                      |
| - Test feature  | •              | •                  | •                    |
| - Audible alarm   | •              | •                  | •                    |
| - Multiple user interface languages including Polish      | •              | •                  | •                    |
| - Integrated temperature sensor                           | •              | •                  | •                    |
| - Integrated Wi-Fi module to support app control          | •              | •                  | •                    |
| - Support for Modbus and control via network              | •              | •                  | •                    |
| - Max. number of indoor units (BMS control system)        | 16             | 16                 | 16                   |
| - Max. number of units per controller in a cascade system | 6              | 6                  | 6                    |



# Expansion modules

This feature allows for the addition of extra thermostats or temperature sensors to the Aquami Split/Monoblock unit, enabling precise room temperature control. The unit enters standby mode once the set temperature is achieved by all connected thermostats or sensors. Thermostats and sensors not included.



| Symbol                                      | RAEST6        |
|---|---------------|
| EAN Code                                    | 5905567603273 |
| Number of additional thermostats to connect | 6             |

# Temperature sensors

- Top of the Tbt1 expansion tank,
- Bottom of the Tbt2 expansion tank,
- Tsolar system,
- Supply water for Tw2 zone 2,
- Leaving water temperature T1,
- DHW tank sensor.



|             | Symbol                                      | RASN-MTF1A    | RASN-MTF2A    | RASN-MTF1H0   | RASN-MTF2HA10   | RASN-MSDHW            |
|-------------|---|---------------|---------------|---------------|-----------------|-----------------------|
| GENERAL     | EAN code                                    | 5905567603211 | 5905567603228 | 5905567613104 | 5905567613111   | 5905567603303         |
|             | Compatible series                           | AQUAMI        | AQUAMI        | HEATMI        | HEATMI<br>AIRMI | AQUAMI<br>MULTI SPLIT |
|             | Sensor cable length                         | 10 mb         | 10 mb         | 10 mb         | 10 mb           | 10 mb                 |
|             | Sheath colour                               | random        | random        | random        | random          | random                |
| APPLICATION | Buffer tank top temperature sensor          | •             |               |               | •               |                       |
|             | Buffer tank bottom temperature sensor       | •             |               |               | •               |                       |
|             | DHW tank temperature sensor                 | •             |               | •             |                 | •                     |
|             | Solar system temperature sensor             |               | •             |               | •<br>(HEATMI)   |                       |
|             | Leaving water temperature sensor            |               |               |               |                 |                       |
|             | Second zone supply water temperature sensor |               | •             | •             | •<br>(AIRMI)    |                       |

# Pump stations

Pump station is a pre-assembled unit of equipment and fittings designed to connect the heat pump to the heating system.



|               | Symbol  | RASPG-MVA                      | RASPG-DCA                |
|---------------|---|--------------------------------|--------------------------|
| COMPONENTS    | Name  | Pump station with mixing valve | Direct flow pump station |
|               | Product code EAN  | 5905567614545                  | 5905567603235            |
|               | Supply shut-off valve   | •                              | •                        |
|               | Return shut-off valve   | •                              | •                        |
|               | Supply temperature gauge  | •                              | •                        |
|               | Return temperature gauge  | •                              | •                        |
|               | Integrated in shut-off valve knob   | •                              | •                        |
|               | Non-return valve integrated in the return shut-off valve (blue temperature gauge) | •                              | •                        |
|               | Circulation pump  | •                              | •                        |
|               | Shut-off valve upstream the pump  | •                              | •                        |
|               | RAS3W-MV mixing control valve   | •                              |                          |
| SPECIFICATION | Connections on the heat pump side   | G1 1/2"                        | G1 1/2"                  |
|               | Connections on the system side  | GW G1"                         | GW G1"                   |
|               | Kvs   | 12 m³/h                        | 6,2 m³/h                 |
|               | Power supply  | 230V AC                        | 230V AC                  |
|               | Maximum pressure  | 10 bar                         | 10 bar                   |
|               | Maximum medium temperature  | 110°C                          | 110°C                    |

# Manifolds

Our manifolds facilitate quick and easy connection of two or three RASPG pump stations to the heat pump. Its sleek housing ensures thermal insulation.



| Symbol  | RAVS-SV2                       | RAVS-SV2HW   | RAVS-SV3                         | RAVS-SV3HW   |
|---|--------------------------------|--|----------------------------------|--|
| Name  | Manifold for two pump circuits | Manifold for two pump circuits with a hydraulic coupling | Manifold for three pump circuits | Manifold for three pump circuits with a hydraulic coupling |
| EAN Code  | 5905567603310                  | 5905567603327  | 5905567603334                    | 5905567603341  |
| Connections on the heat pump side                   | G1 1/2"                        | G1 1/2"  | G1 1/2"                          | G1 1/2"  |
| Connections on the pump station side                | GW 1"                          | GW 1"  | GW 1"                            | GW 1"  |
| Spacing of the connections on the pump station side | 125 mm                         | 125 mm   | 125 mm                           | 125 mm   |
| Flow rate   | max. 3 m³/h                    | max. 3 m³/h  | max. 3 m³/h                      | max. 3 m³/h  |
| Maximum pressure                                    | 6 bar                          | 6 bar  | 6 bar                            | 6 bar  |
| Maximum medium temperature                          | 110°C                          | 110°C  | 110°C                            | 110°C  |



## Zone, anti-freeze valves



| Symbol                               | RAS3W-ZV                       | RAS3W-ZV21                     | RAS3W-MV                          | RASAV-AV10        | RASAV-AV20        |
|--------------------------------------|--------------------------------|--------------------------------|-----------------------------------|-------------------|-------------------|
| Name                                 | 3-way zone valve with actuator | 3-way zone valve with actuator | 3-way control valve with actuator | Anti-freeze valve | Anti-freeze valve |
| EAN Code                             | 5905567603297                  | 5905567614538                  | 5905567603280                     | 5905567603105     | 5905567603112     |
| Size                                 | DN 20 G1 (male)                | DN 25 G1 1/4" (male)           | DN 25 RP1" (female)               | 2 x G1"           | 2 x G1 1/4"       |
| Maximum medium temperature           | -                              | -                              | -                                 | 70°C              | 70°C              |
| Kvs                                  | 8 m³/h                         | 11 m³/h                        | 12 m³/h                           | 55 m³/h           | 70 m³/h           |
| Switchover time                      | 8 s                            | 15 s                           | 120 s                             | -                 | -                 |
| System discharge opening temperature | -                              | -                              | -                                 | 3°C               | 3°C               |

# Dirt separators

The magnetic dirt separator, suitable for both heating and cooling systems, is installed before the heat pump in the system's return. It employs a dual mechanical and magnetic filtration system to shield the installation from impurities and includes a drain valve for the effortless removal of contaminants.



| Symbol                        | RASMD5-DS10             | RASMD5-DS20             |
|-------------------------------|-------------------------|-------------------------|
| Name                          | Magnetic dirt separator | Magnetic dirt separator |
| Product EAN                   | 5905567603129           | 5905567603136           |
| Connection size               | 2x GW G1"               | 2x GW G1 ¼"             |
| Maximum medium temperature    | 90°C                    | 90°C                    |
| Recommended maximum flow rate | 2,1 m³/h                | 7,3 m³/h                |
| Kvs                           | 6,9 m³/h                | 17,9 m³/h               |

# Circulation pumps

The circulation pump, designed for use in heating systems, is installed after components such as the buffer tank, plate heat exchanger, hydraulic coupling, and manifolds. It features 9 programmable characteristics, encompassing 3 constant speed settings, 3 proportional settings, and 3 constant pressure settings. The pump is equipped with LED indicators to display the currently selected operating characteristic.



| Symbol                    | RASHSP-PH10      | RASHSP-PH20   |
|---------------------------|------------------|---------------|
| Name                      | Circulation pump | 5905567603150 |
| Product EAN               | 5905567603143    | 1,6 m         |
| Cable length              | 1,6 m            | 1,6 m         |
| Connection size           | 2x GW G1"        | 2x GW G1 ½"   |
| Max. glycol concentration | 50%              | 50%           |
| Max. pump head            | 7 m              | 7 m           |
| Effective length          | 130 mm           | 180 mm        |

# Rubber supports

Anti-vibration support for heat pump outdoor unit installation. It is made of black rubber with a core of high-quality cushioning element.




| Symbol                     | IMS08                     | IPR400        | IPR600        | IPR1000       |         |
|----------------------------|---------------------------|---------------|---------------|---------------|---------|
| EAN Code                   | 5905567604010             | 5905567604065 | 5905567604072 | 5905567604058 |         |
| Colour                     | black                     | black         | black         | black         |         |
| Material                   | rubber                    | rubber        | rubber        | rubber        |         |
| Number of units in the set | 4 pcs.                    | 2 pcs.        | 2 pcs.        | 2 pcs.        |         |
| Dimensions                 | Total height              | 80 mm         | 100 mm        | 100 mm        |         |
|                            | Cushioning element height | 60 mm         | -             | -             |         |
|                            | Depth                     | 38 - 47 mm    | 400 mm        | 600 mm        | 1000 mm |
|                            | Foot height               | 15 mm         | -             | -             | -       |
|                            | Width                     | 107 mm        | 180 mm        | 180 mm        | 1800 mm |
| Bolt diameter              | M8                        | M10           | M10           | M10           |         |
| Max load per set           | 300 kg                    | 400 kg        | 600 kg        | 1000 kg       |         |

# Steel brackets

The bracket's design accommodates the installation of Rotenso outdoor heat pump units by allowing adjustment of the connector spacing (lengthening or shortening). Made from corrosion-resistant, double-protected steel through galvanization and powder coating, the bracket also includes adjustable feet with mounting holes for secure ground attachment.



| Symbol    | IHG520M                            | IHG520S                            | IHG520MG                           | IHG520SG                           |              |
|-----------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|--------------|
| EAN code  | 5905567604720                      | 5905567604744                      | 5905567604737                      | 5905567604751                      |              |
| Colour    | white                              | white                              | graphite                           | graphite                           |              |
| Material  | galvanised and powder-coated steel | galvanised and powder-coated steel | galvanised and powder-coated steel | galvanised and powder-coated steel |              |
| Wymiary   | Total height                       | 416 mm                             | 416 mm                             | 416 mm                             |              |
|           | Height                             | 406 mm                             | 406 mm                             | 406 mm                             |              |
|           | Depth - top                        | 593 mm                             | 593 mm                             | 593 mm                             | 593 mm       |
|           | Depth - bottom                     | 695 mm                             | 695 mm                             | 695 mm                             | 695 mm       |
|           | Width (adjustable)                 | 520 - 1019 mm                      | 520 - 850 mm                       | 520 - 1019 mm                      | 520 - 850 mm |
|           | Mounting hole spacing (adjustable) | 132 - 520 mm                       | 132 - 520 mm                       | 132 - 520 mm                       | 132 - 520 mm |
| Max. load | 250 kg                             | 200 kg                             | 250 kg                             | 200 kg                             |              |

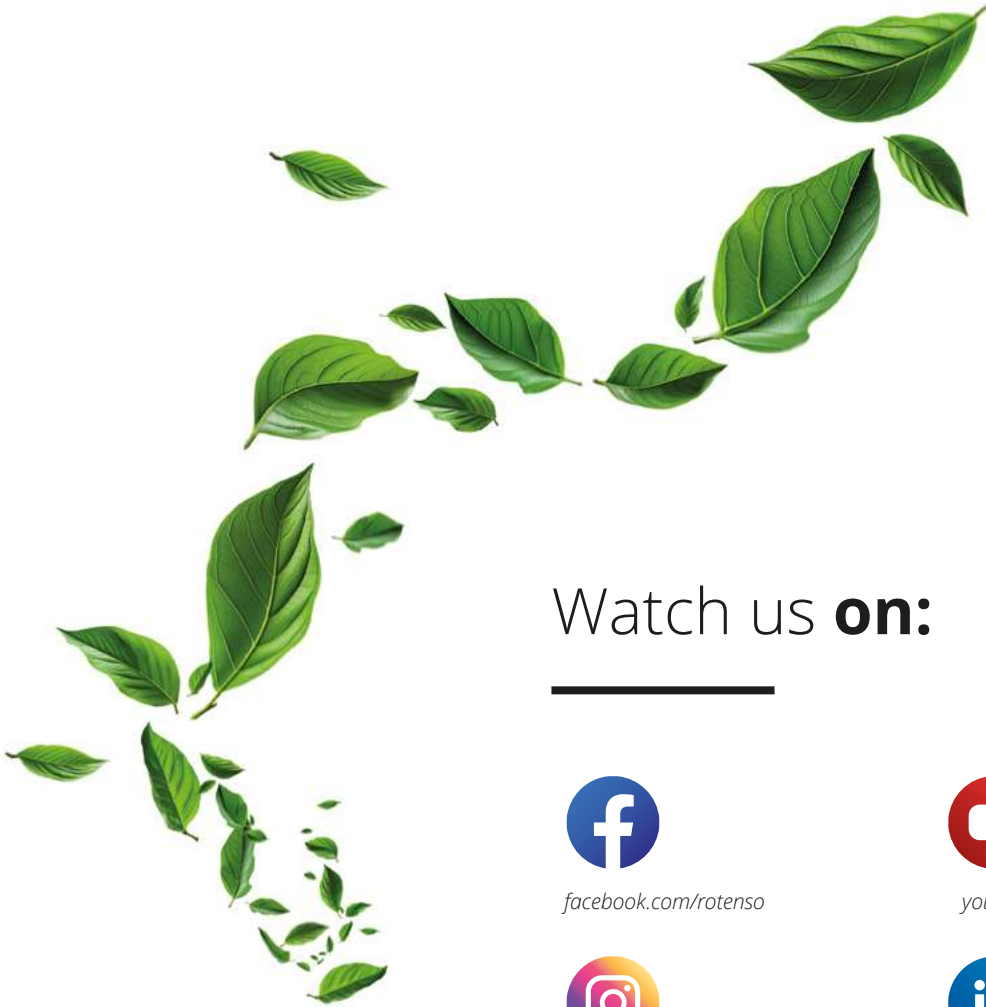

## Watch us **on:**

---



[facebook.com/rotenso](https://facebook.com/rotenso)



[youtube.com/@Rotenso\\_PL](https://youtube.com/@Rotenso_PL)



[instagram.com/rotenso.official](https://instagram.com/rotenso.official)



[linkedin.com/rotenso](https://linkedin.com/rotenso)



[tiktok.com/@rotenso.official](https://tiktok.com/@rotenso.official)



[rotenso.com](http://rotenso.com)

