



Model	TX1A
Code	CMTX1A
Recommended surface area m^2	100*
Recommended no. of sockets	6*



Model	TX2A
Code	CMTX2A
Recommended surface area m^2	150*
Recommended no. of sockets	10*



Model	TX3A
Code	CMTX3A
Recommended surface area m^2	300*
Recommended no. of sockets	18*



Model	TX4A
Code	CMTX4A
Recommended surface area m^2	700*
Recommended no. of sockets	25*

*Data recommended by the manufacturer.



*IP55 channelled air expulsion based on model
IP43 direct expulsion from the central vacuum unit.

APF system

Self-cleaning filter system

The APF system is available on the PERFETTO, TXA and TPA models.
Europe Patent Pending no. 06793421.6




Clean Bag



Dynamic Control Display



My TUBO

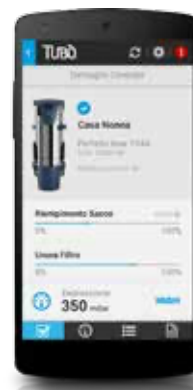



Peretto TPA - TP line



The evolution of the concept of vacuuming

The Peretto TPA – TP line represents a new conception of advanced vacuum systems.

It is a versatile and user-friendly work tool that was created to satisfy the functional needs of our dynamic and modern customers, allowing both the installation technician and end user to interact with the machine in a simple and direct manner.

Functionality-oriented design

The Peretto TPA - TP line achieves an optimum balance between technology and design, thanks to many functional features that help both the installation technician and the end user.

Dual air expulsion (right and left)

A new feature that allows maximum flexibility of installation, regardless of the position of the central vacuum unit.

IP electrical protection

The TPA - TP central vacuum units are certified with a high degree of protection based on the model (see technical charts).

Silent operation

Thanks to the use of high quality materials and the optimisation of the motor's technical compartment, the noise level has been reduced even further.

Instant AVI display

Positioned on the front of the central vacuum unit, this is an instrument that provides clear indications that are easy to understand thanks to a set of icons and parameters that instantly signal the operational status of the central vacuum unit.

ModBus communication system

The TPA and TP central vacuum units are equipped with a ModBus communication system that can be interfaced with the most common home automation systems.

Dual dust inlet

Option to connect the tubing to the central vacuum unit on both the right and left sides.

Built-in vacuum socket

The TPA and TP central vacuum units have a built-in vacuum socket on the front of the machine.

APF system (Self-cleaning filter system)

An innovative and patented system that collects dust through vibration. It reduces maintenance work and keeps the central vacuum unit's suction capacity at optimal levels for longer. (TPA models only)

Multifunntion side pockets

Convenient and practical for storing the installation manual and spare bags. (Not included with models TP1A - TP1)

Clean Bag

Dust collection bags with an air-tight closing system that completely prevents direct contact with the dust.

Dust container

A simplified hooking and unhooking system, with the option to partially open the container to activate the Clean Bag air-tight closing system.

Clean Bag locking system

Rapid system for attaching the Clean Bag to the dust container with pressure clips.

Tubò | Link (cod. CMT820)

This electronic tool allows you to monitor and reset the centralized vacuum cleaner system "TUBÒ" in real time from anywhere and at any time, thanks to the possibility of connection via Wi-Fi or Remote.

The check is carried out via iPhone, iPad or Android device using the free Aertecnica App: My Tubò.